10K CAST IRON GATE VALVE FLANGED ENDS

KITZ Fig: 10FCLU

Sizes: 11/2-24inch(40-600mm)

BOLTED BONNET, OUTSIDE SCREW & YOKE, FLAT FACE FLANGED ENDS.

Standards

. End to End: JIS B2002

End Connection: JIS B2239 10KWall Thickness: KITZ STANDARD


Test Standard
. KITZ STANDARD

Approvals

JIS Product Certification 40-600 mm (11/2-24 inch)

approved

Dimensions

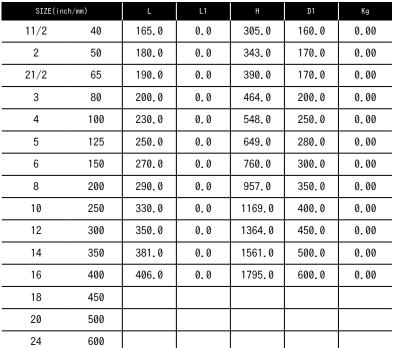



matoriat Erot		
NAME OF PART	MATERIAL	SPECIFICATION
BODY	CAST IRON	FC200
BONNET	CAST IRON	FC200
STEM	STAINLESS STEEL	304SS
DISC	CAST IRON	FC200

Specifications

10K CAST IRON GATE VALVE FLANGED ENDS, BOLTED BONNET, OUTSIDE SCREW & YOKE, FLAT FACE FLANGED ENDS.

End to End : JIS B2002, End Connection : JIS B2239 10K, Wall Tchickness : KITZ STANDARD, Test Standard : KITZ STANDARD, Sizes : 11/2-24inch(40-600mm), Approvals : JIS Product Certification 40-600mm (11/2-24 inch), BODYMATERIAL : CAST IRON, BONNETMATERIAL : CAST IRON, STEMATERIAL : STAINLESS STEEL, DISCMATERIAL : CAST IRON, KITZ

Fig : 10FCLU





