20K DUCTILE IRON Y TYPE STRAINER FLANGED ENDS

KITZ Fig: 20FDYB

Sizes: 3/8-12inch(10-300mm)
BOLTED COVER, 40 MESH SCREEN.
Standards
. End to End: KITZ STANDARD
. End Connection: JIS B2239 20K
. Wall Thickness: KITZ STANDARD
Test Standard
. KITZ STANDARD
Approvals
MLIT 10-300 mm (3/8-12 inch)
approved

国 土

Dimensions

SIZE(inch/mm)		L	L1	H	D1	Kg
3/8	10	120.0	0.0	63.0	0.0	0.00
1/2	15	125.0	0.0	63.0	0.0	0.00
3/4	20	140.0	0.0	71.0	0.0	0.00
1	25	160.0	0.0	84.0	0.0	0.00
11/4	32	185.0	0.0	120.0	0.0	0.00
11/2	40	200.0	0.0	132.0	0.0	0.00
2	50	250.0	0.0	164.0	0.0	0.00
21/2	65	305.0	0.0	220.0	0.0	0.00
3	80	360.0	0.0	252.0	0.0	0.00
4	100	415.0	0.0	292.0	0.0	0.00
5	125	465.0	0.0	333.0	0.0	0.00
6	150	515.0	0.0	380.0	0.0	0.00
8	200	620.0	0.0	441.0	0.0	0.00
10	250	760.0	0.0	548.0	0.0	0.00
12	300	870.0	0.0	655.0	0.0	0.00

For more details, please refer to the drawing.

Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	DUCTILE IRON	FCD-S
COVER	DUCTILE IRON	FCD-S

Specifications

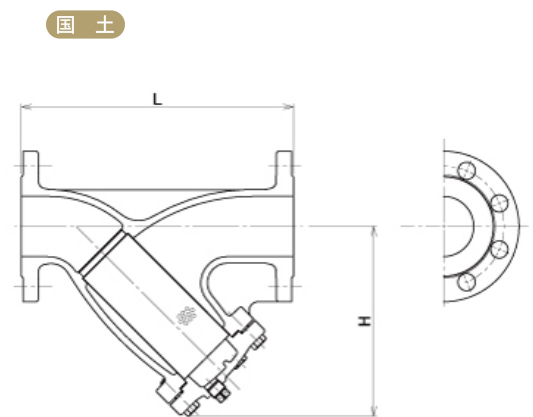20K DUCTILE IRON Y TYPE STRAINER FLANGED ENDS,BOLTED COVER, 40 MESH SCREEN.
End to End : KITZ STANDARD,End Connection : JIS B2239 20K,Wall Tchickness : KITZ STANDARD,Test Standard : KITZ STANDARD,Sizes : 3/8-12inch(10-300mm),Approvals : MLIT 10-300 mm (3/8-12 inch),BODYMATERIAL :DUCTILE IRON,COVERMATERIAL :DUCTILE IRON,KITZ Fig : 20FDYB

ISO 9001 CERTIFIED Since 1989