

CLASS 150 CAST STEEL BALL VALVE FLANGED ENDS WITH GEAR OPERATED

KITZ Fig: G-150SCTDZ

Sizes: 10-10inch(250-250mm)

ANTI-STATIC DEVICE, FULL BORE, CONFORM TO ISO5211.

Standards

- End to End: ASME B16.10 CLASS 150
- End Connection: ASME B16.5 CLASS 150
- Wall Thickness: ASME B16.34 CLASS 150

Test Standard

- API 598

Dimensions

SIZE (inch/mm)	L	L1	H	D1	Kg
10 250	533.0	0.0	448.0	500.0	0.00



Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	CAST STEEL	A216 Gr. WCB/SCPH2
BODY CAP	CAST STEEL	A216 Gr. WCB/SCPH2
STEM	STAINLESS STEEL	304SS
BALL	STAINLESS STEEL	A351 Gr. CF8/SCS13A

Specifications

CLASS 150 CAST STEEL BALL VALVE FLANGED ENDS WITH GEAR OPERATED, ANTI-STATIC DEVICE, FULL BORE, CONFORM TO ISO5211.


End to End : ASME B16.10 CLASS 150, End Connection : ASME B16.5

CLASS 150, Wall Thickness : ASME B16.34 CLASS 150, Test Standard :

API 598, Sizes : 10-10inch(250-250mm), BODY MATERIAL : CAST STEEL, BODY

CAP MATERIAL : CAST STEEL, STEM MATERIAL : STAINLESS STEEL, BALL MATERIAL

: STAINLESS STEEL, KITZ Fig : G-150SCTDZ

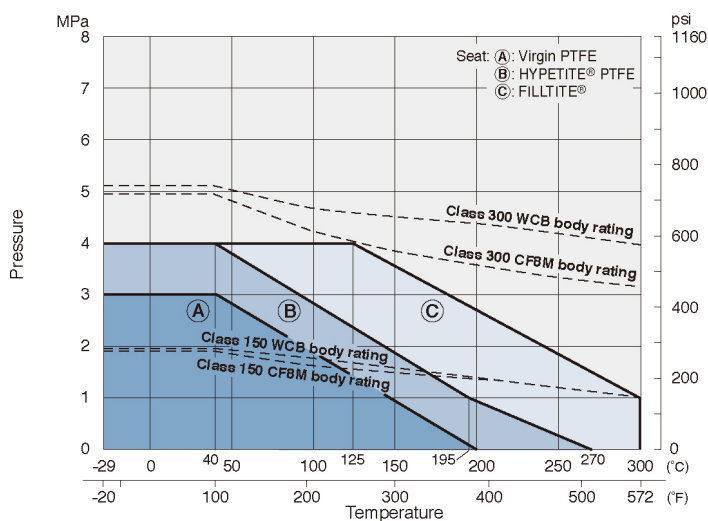

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

KITZ

KITZ CORPORATION Tokyo Shiodome Building, 1-9-1, Higashi-Shimbashi, Minato-ku, Tokyo 105-7305, Japan
© KITZ Corporation. All Right Reserved.

ISO 9001
CERTIFIED
Since 1989