## CLASS 150 CAST STAINLESS STEEL BALL VALVE FLANGED ENDS WITH GEAR OPERATED

KITZ Fig: G-150UTDZM Sizes: 10-10inch(250-250mm)

ANTI-STATIC DEVICE, FULL BORE, CONFORM TO ISO5211.

Standards

End to End: ASME B16.10 CLASS 150
End Connection: ASME B16.5 CLASS 150
Wall Thickness: ASME B16.34 CLASS 150

Test Standard . API 598

## Dimensions

SIZE(	inch/mm)	L	L1	Н	D1	Kg
10	250	533.0	0.0	448.0	500.0	0.00

## Material List


NAME OF PART	MATERIAL	SPECIFICATION	
BODY	STAINLESS STEEL	A351 Gr.CF8M/SCS14A	
BODY CAP	STAINLESS STEEL	A351 Gr.CF8M/SCS14A	
STEM	STAINLESS STEEL	316SS	
BALL	STAINLESS STEEL	A351 Gr.CF8M/SCS14A	


## **Specifications**

CLASS 150 CAST STAINLESS STEEL BALL VALVE FLANGED ENDS WITH GEAR OPERATED, ANTI-STATIC DEVICE, FULL BORE, CONFORM TO ISO5211.

End to End: ASME B16.10 CLASS 150, End Connection: ASME B16.5 CLASS 150, Wall Tchickness: ASME B16.34 CLASS 150, Test Standard: API 598, Sizes: 10-10inch(250-250mm), BODYMATERIAL: STAINLESS STEEL, BODY CAPMATERIAL: STAINLESS STEEL, BALLMATERIAL: STAINLESS STEEL, BALLMATERIAL: STAINLESS STEEL, BALLMATERIAL: STAINLESS STEEL, BALLMATERIAL: STAINLESS STEEL, KITZ Fig: G-150UTDZM





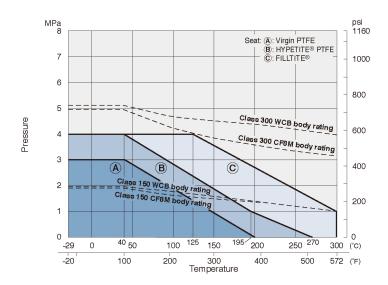

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.



