

10K CAST STAINLESS STEEL Y TYPE STRAINER FLANGED ENDS

KITZ Fig: UYBM

Sizes: 3/8-2inch(10-50mm)

40 メッシュ スクリーン

Standards

- End to End: KITZ STANDARD
- End Connection: JIS B2220 10K
- Wall Thickness: KITZ STANDARD

Test Standard

- KITZ STANDARD

Conform to

RoHS 10-50 mm (3/8-2 inch)

approved

Dimensions

SIZE (inch/mm)	L	L1	H	D1	Kg
3/8 10	110.0	0.0	50.0	0.0	0.00
1/2 15	120.0	0.0	58.0	0.0	0.00
3/4 20	130.0	0.0	66.0	0.0	0.00
1 25	150.0	0.0	78.0	0.0	0.00
1 1/4 32	170.0	0.0	93.0	0.0	0.00
1 1/2 40	190.0	0.0	103.0	0.0	0.00
2 50	220.0	0.0	121.0	0.0	0.00


Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	STAINLESS STEEL	A351 Gr. CF8M/SCS14A
COVER	STAINLESS STEEL	A351 Gr. CF8M/SCS14A

Specifications

10K CAST STAINLESS STEEL Y TYPE STRAINER FLANGED ENDS, 40 メッシュ スクリーン

End to End : KITZ STANDARD, End Connection : JIS B2220 10K, Wall Thickness : KITZ STANDARD, Test Standard : KITZ STANDARD, Sizes : 3/8-2inch(10-50mm), Conform to : RoHS 10-50 mm (3/8-2 inch), BODY MATERIAL : STAINLESS STEEL, COVER MATERIAL : STAINLESS STEEL, KITZ Fig : UYBM

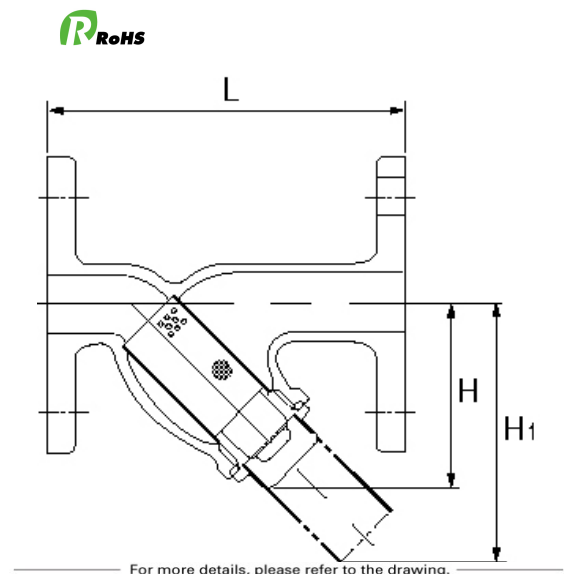

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

KITZ

KITZ CORPORATION Tokyo Shiodome Building, 1-9-1, Higashi-Shimbashi, Minato-ku, Tokyo 105-7305, Japan
© KITZ Corporation. All Right Reserved.

ISO 9001
CERTIFIED
Since 1989