

# TYPE 600

# BRASS BALL VALVE

One-piece body, Blowout-proof Stem,  
Threaded ends to BS21 or NPT

W.O.G. non-shock 4.14 MPa (600 psi), W.O.G. 150°C 1.03 MPa (150 psi)



**Fig. TK**

- Threaded end to BS21

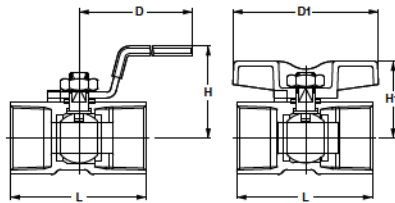


**Fig. TKT**

- Threaded end to BS21

**Fig. AKTK**

- Threaded end to ASME B1.20.1
- AKTK ¼ to 2



## Materials

Parts	Material
Body	Brass
Body cap	Brass
Stem	Dezincification Resistant Brass
Ball	Brass*
Ball seat	G/F PTFE
Grand packing	G/F PTFE

\*Chrome or Nickel-chrome plated

## Dimensions

Nominal Size	mm									
	inch	1/8	1/4	3/8	1/2	3/4	1	1¼	1½	2
	mm	6	8	10	15	20	25	32	40	50
<b>L</b>		32	39	44	56.5	59	71	78	83	100
<b>H</b>		31	31	36	41	44	48	54	65	72
<b>H1</b>		23	23	27	31	34	42	48	53	60
<b>D</b>		60	60	70	85	85	100	100	125	125
<b>D1</b>		35	35	40	60	60	76	76	100	100