

# **Hinge systems**

- ► CLIP top BLUMOTION | CLIP top hinges
- **▶▶** Corner cabinet solution

# **Ablum**

# Special hinge for corner cabinets with bi-fold doors For door thicknesses from 15–23 mm, factory setting for 19 mm door thickness For use in combination with 155° or 170° hinge CLIP top with closing mechanism (spring) 60° opening angle 3-dimensional front adjustment Easy gap and depth adjustment using the spiral-tech feature Tool-free door to cabinet assembly and removal

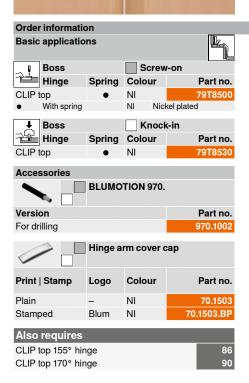



# CLIP top BLUMOTION | CLIP top − hinges • Corner cabinet solution ◀◀

# **Hinge systems**


Ablum


## Corner cabinet bi-fold hinge


DQDQJY

#### Planning

#### Hinge dimensions and gap calculation based on factory setting








Application for 19 mm thick door in conjunction with 0 mm spaced standard mounting plate


Application for 19 mm thick door in conjunction with 3 mm spaced standard mounting plate


The hinge boss of the bi-fold hinge should be fixed to the same front as the hinge boss of the 170° and 155° hinge

#### Adjustment










Height adjustment Max. ±3.0 mm See mounting plates


Side adjustment +3.0 mm -2.0 mm


Depth adjustment ±2.0 mm

Gap adjustment

# Screw-on







### Page instructions

Overview - CLIP top BLUMOTION | CLIP top - hinges Mounting plates

Accessories - hinge arm cover cap Accessories - general Overview - BLUMOTION for doors Overview - assembly devices More technical details

156

164

166

171

Assembly, removal and adjustment

Short-URL www.blum.com/a210

