


Minimalist T120-Series

Minimalist style series of thin-edged
sliding doors.

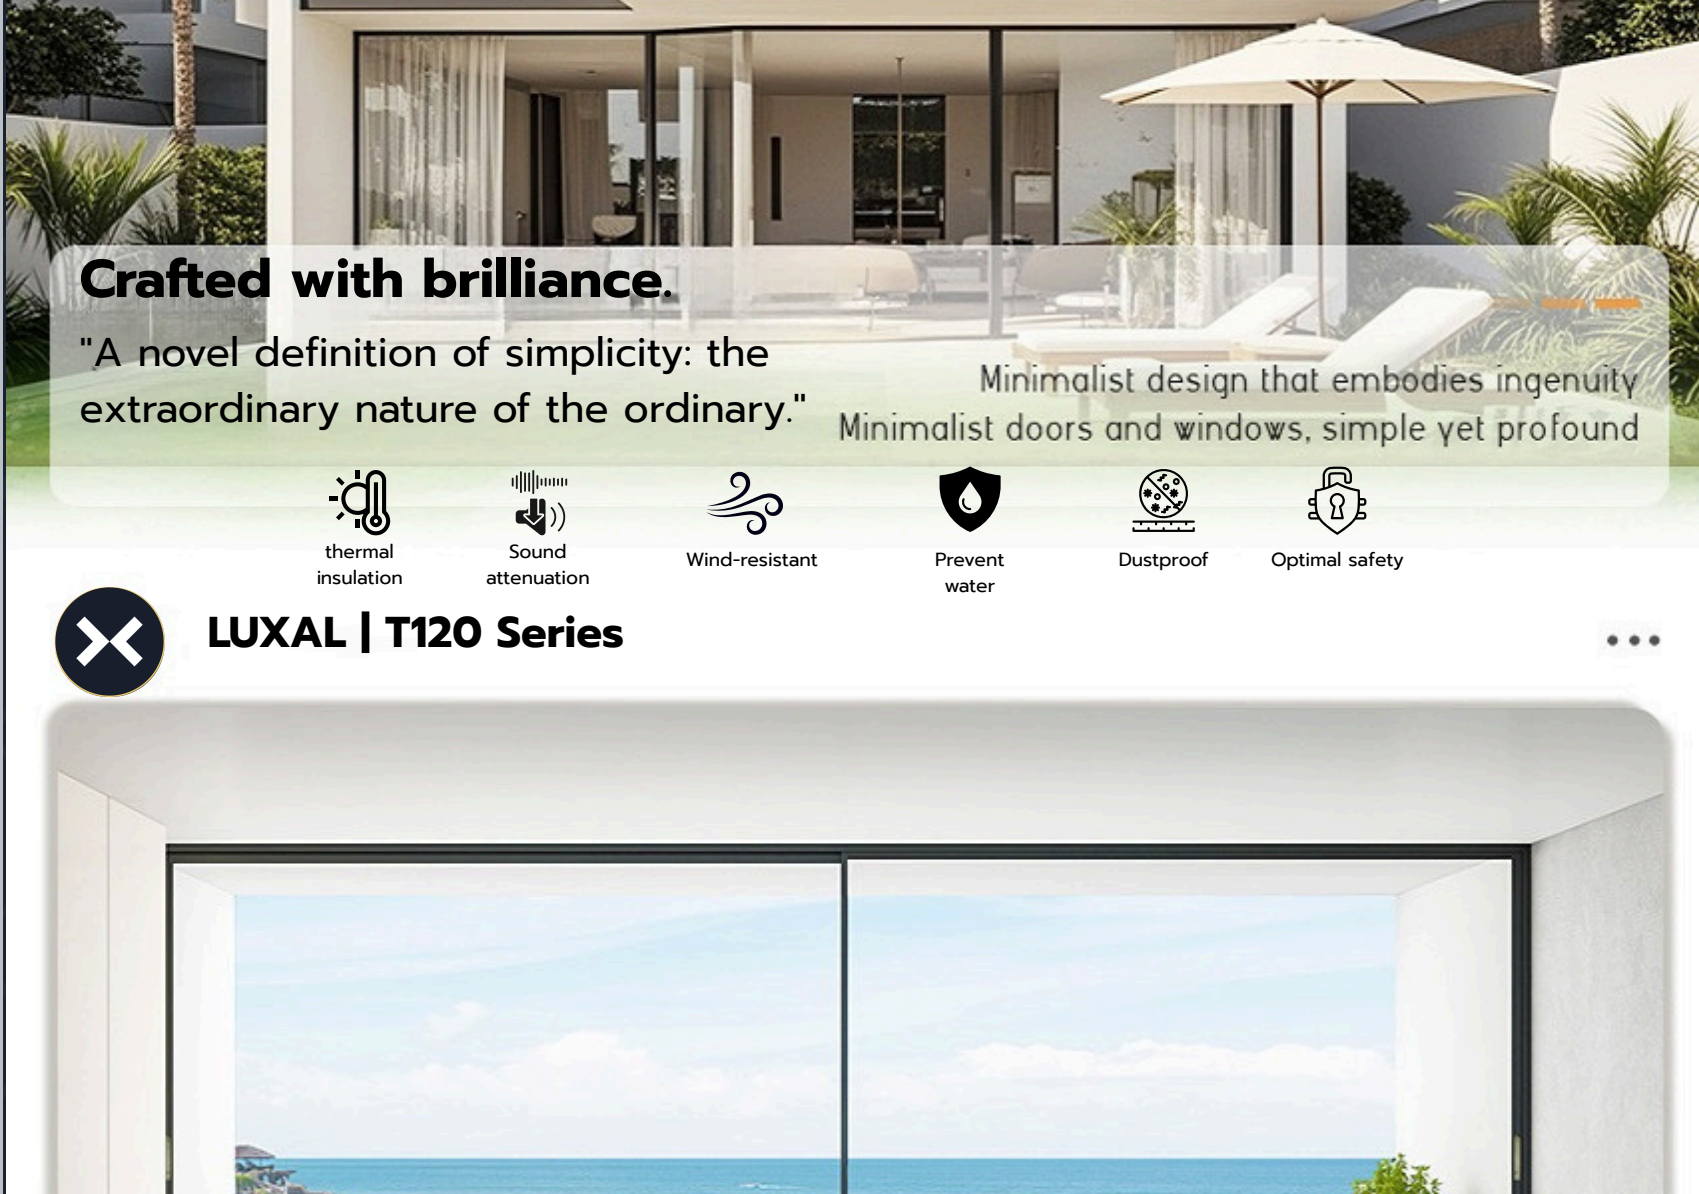

Crafted with brilliance.

"A novel definition of simplicity: the extraordinary nature of the ordinary."

Minimalist design that embodies ingenuity
Minimalist doors and windows, simple yet profound



thermal
insulation



Sound
attenuation



Wind-resistant



Prevent
water



Dustproof



Optimal safety



LUXAL | T120 Series



LUXAL | T120 Series

Usage Scenarios - USAGE SCENARIO



balcony entrance

Maglev opening

PRODUCT DETAILS




T120 Sliding door

XYYG120 Minimalist Mid-Narrow Sliding Door Collection

Product details(Product Specifications)

- Frame cross-sectional width: 120 mm.
- Frame width: Center post 56 mm / Side post 30 mm / Side frame 43 mm.
- Material: Aluminum alloy (6063-T5 and 6063-T6)
- Aluminum thickness: 3.0 mm.
- Insulated glass: 5mm + 22mm + 5mm (24mm insulated glass)
- Hardware: SZ HOPO, Oaasm, Staforce, Cmech
- Structural System: Multi-Chamber Thermal Break Framework
- Energy Efficiency: Thermal Break Material PA66GF25
- Sealing system: HAIDA three-layer rubber seal.
- Powder coating specifications: AkzoNobel powder coating (premium, world-class quality).



Minimalist
Frame



Wind
Resistant



Soundproof



Premium
Brand Glass




Weather
Resistant

T120-Series

Size Limits

- (W): 2-panel + 1 mosquito net: 950 - 4,500 mm.
- (W): 4-panel + 2 mosquito nets: 1,840 - 7,000 mm.
- (W): 3-panel configuration (without mosquito net): 1,400 - 7,000 mm.

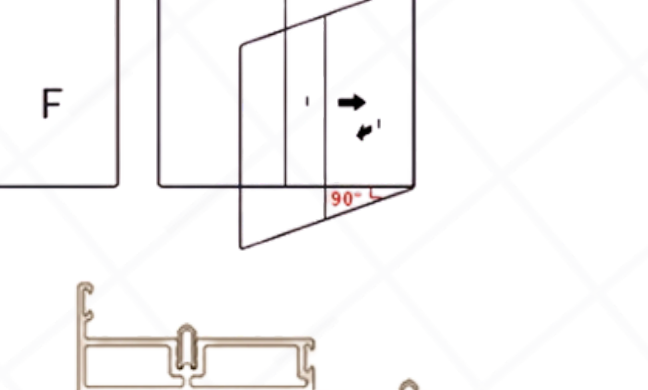

- (H): Standard: Maximum 2,800 mm (maximum door panel weight of 200 kg / standard center post)
- (H): Special: Maximum 3,200 mm (maximum door panel weight 280 kg / reinforced central post)


Activation techniques



C-shaped rail



A-frame track

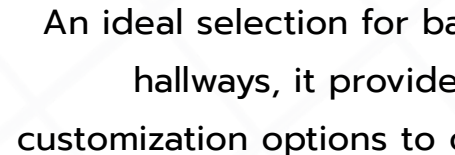

B-shaped circuit



Minimalist aesthetics



The optimal solution for partitioning balconies and walkways.



An ideal selection for balconies and hallways, it provides adaptable customization options to complement your environment.

The visible surface of the hook measures merely 3 centimeters. Various opening methods are available for selection.

3.0 mm thick, high-strength aluminum panel.

Safer due to the use of more durable 6005A aircraft-grade aluminum compared to 6063. Accommodates extra-large single panel areas of up to 8 sq.m., with a maximum single panel width of 2.2 meters, without deformation.

Enhanced strength, increased yield force, and improved safety.

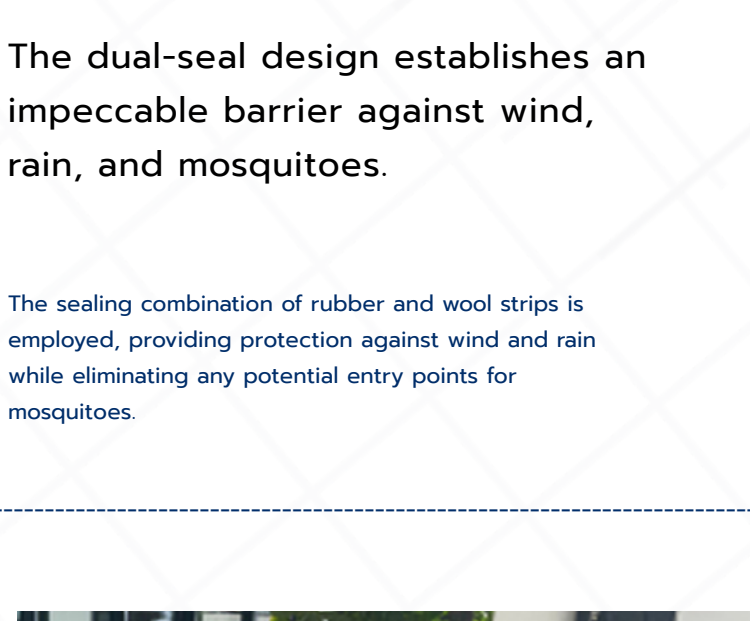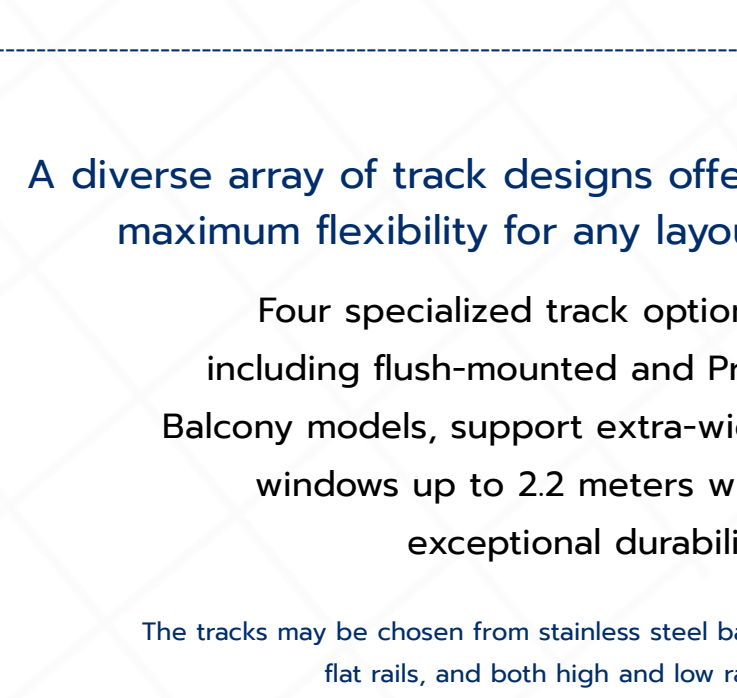

A diverse array of track designs offers maximum flexibility for any layout.


Four specialized track options, including flush-mounted and Pro-Balcony models, support extra-wide windows up to 2.2 meters with exceptional durability.

The tracks may be chosen from stainless steel bars, flat rails, and both high and low rails.

Rubber seal kit featuring a dust-proof brush strip.

The dual-seal design establishes an impeccable barrier against wind, rain, and mosquitoes.

The sealing combination of rubber and wool strips is employed, providing protection against wind and rain while eliminating any potential entry points for mosquitoes.

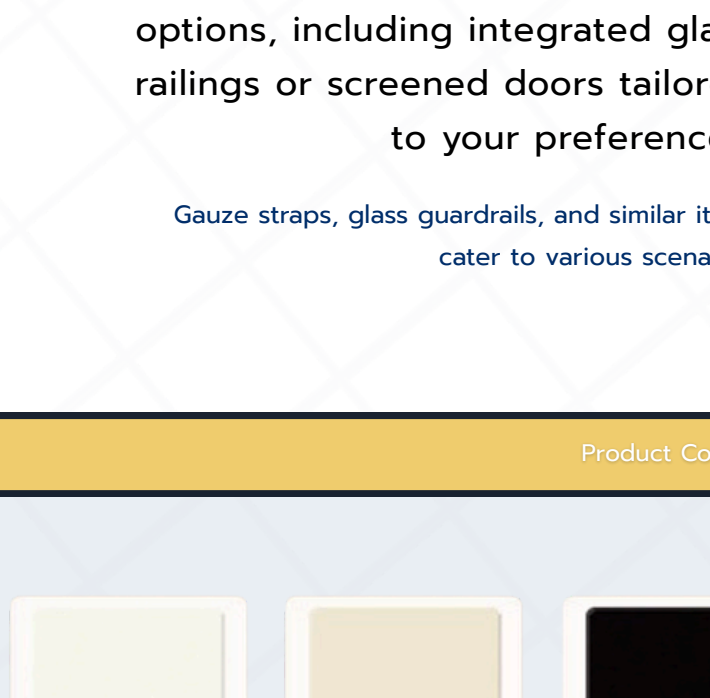


Versatile to accommodate your lifestyle.


Accommodate your specific requirements with a range of options, including integrated glass railings or screened doors tailored to your preferences.

Gauze straps, glass guardrails, and similar items cater to various scenarios.


Product Color




Mint Blue




Spring Green




White Gold



Ivory White



Creamy Gray



Rose Black



Deep Coffee Brown



Obsidian Black



Metallic Sand Gray



Star Asia Grey




Starry Gray




GM Murine Black




Metallic Brew




Tea Brown



Sand Brown



GM Dark Roast Coffee



Fluoro Premium Gold

Hardware/accessories



LUXAL Tailored Model
Handle

A profound connection at every turn. Exceptional brilliance, remarkable design.