

EMERGENCY
LIGHT
SYSTEM



FIRE &
SECURITY
SYSTEM



CAR & OTHER
STARTING
APPLICATIONS



ELECTRO-
MEDICAL
DEVICES



UPS



RAILWAY
SIGNAL



COMMUNICATIONS
POWER SUPPLY




DC POWER
SUPPLY

BCN-12V28



Application

Emergency Light Systems
Fire & Security System
Cars & other Starting Applications
Medical Equipment
Uninterruptible Power Supply(UPS)
Railway signal
Communication Power Supply
DC Power Supply

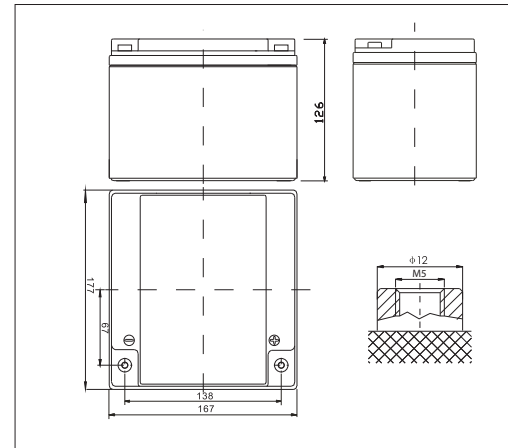

BATTERY BCN 12V28AH Sealed Lead Acid Maintenance Free

Specifications

Nominal Voltage		12V
Rated Capacity(20 hour rate)		28Ah
Dimensions	Total Height (with terminals)	4.96 inches(126mm)
	Height	4.96 inches(126mm)
	Length	6.97 inches(177mm)
	Width	6.57 inches(167mm)
Weight		Approx. 18.04 Pound(8.20kg)

Characteristics

Capacity 77°F(25°C)	20 hour rate (1.40A)	28.0Ah
	10 hour rate (2.41A)	24.1Ah
	5 hour rate (4.16A)	20.8Ah
	1 hour rate (15.6A)	15.6Ah
	15 minute rate (45.6A)	11.4Ah
Internal Resistance	Full Charged Battery 77°F(25°C)	10mΩ
Capacity Affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 months storage	91%
	Capacity after 6 months storage	81%
	Capacity after 12 months storage	60%
Max. Discharge Current 77°F(25°C)	390A(5S)	
Terminal	B1/T4	
Charge (Constant Voltage)	Cycle	Initial Charging Current Less than 7.8A Voltage 14.4 V / 77 °F (25 °C) Equalization temperature compensation coefficient: -24mV / °C
	Float	Voltage 13.8V / 77 °F (25 °C) Compensation coefficient of floating charging temperature: -18mV / °C


Constant Current Discharge (Amperes @25°C)

F.V/Time	5Min	10Min	15Min	30Min	60Min	2H	3H	4H	5H	10H	20H
1.60	99.1	62.9	45.6	28.1	16.5	9.71	6.70	5.20	4.28	2.46	1.33
1.65	96.7	61.1	43.9	27.3	16.2	9.36	6.59	5.10	4.22	2.41	1.32
1.70	92.3	58.5	42.2	26.8	15.9	9.24	6.53	5.04	4.22	2.41	1.31
1.75	88.4	56.2	41.5	26.5	15.6	9.13	6.53	4.99	4.16	2.41	1.30
1.80	83.2	55.6	40.4	25.8	15.3	8.84	6.41	4.94	4.10	2.35	1.27


Constant Power Discharge (Watts Per Cell@25°C)

F.V/Time	5Min	10Min	15Min	30Min	60Min	2H	3H	4H	5H	10H	20H
1.60	184	117	86.9	53.3	29.9	18.9	13.3	10.3	8.51	4.92	2.64
1.65	180	115	83.8	52.1	29.6	18.3	13.1	10.1	8.39	4.88	2.63
1.70	171	110	80.5	51.1	29.0	18.0	13.0	10.1	8.44	4.85	2.62
1.75	165	106	79.1	50.7	28.3	17.8	13.0	10.0	8.32	4.85	2.61
1.80	155	105	77.2	49.2	27.9	17.3	12.8	9.88	8.20	4.74	2.56

Discharge Curves 77°F(25°C)

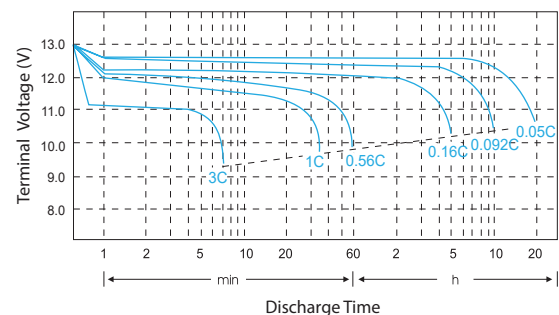

Relationship Between Charge Voltage and Temperature

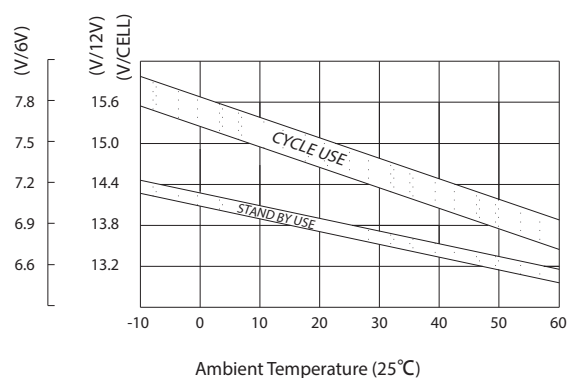

- Manufactured by factory with ISO 9001, ISO 14001, OHSAS 18001, CE, UL STANDARAD