



BCN[®]
Uninterruptible Power Supply

DC Power supply / Industrial battery charger

Charger & Rectifier

24/48/110/125/220/240/400Vdc

Normal current 10-1500A



BCN model PowerGenix range charger is based on interchangeable sub-assemblies to allow full customization and full compliance with the technical specifications required by the clients. It is designed to meet the versatile and stringent electrical and mechanical requirements in industrial environments.

Combined with industrial stand-by battery banks, BCN model PowerGenix range rectifier-chargers can continuously protect your critical DC power industrial equipments and operations from the damage of power failures and interruptions, with its high reliability and superior performance.

Your choice of power protection



BCN UPS @btconnect BCN UPS

BCN PowerGenix Series

BCN Model PowerGenix range industrial battery charger is the flagship charger of BCN model Industrial Power solutions. It integrates proven design topology with the latest advanced digital control technology to control the 6-pulse thyristor bridge rectifier and provide the most reliable and trouble-free performances in any electrical and industrial environments.

Key Features

- **High Reliability and High MTBF** - Robust and unique design allows the charger to continuously operate at full load at a 40°C ambient temperature. Natural ventilation and cooling are available on most of the range. Precise adjustable temperature compensation.
- Versatile constant voltage and constant current charging modes.
- **Enhanced Robustness** - Mechanical design to withstand vertical and horizontal acceleration stress up to 0.5g as standard.
- **Leading Technology** - Phase-controlled Thyristor technology. The embedded micro-computer controller processes °C signals 10 times faster than standard analog methods.
- **Flexible maintenance and Reduced MTTR** - The design make it easy for front-access to all vital modules of the charger.
- **Long design life up to 20+ years** - stem design life up to 20+ appropriate maintenance.
- **Isolation transformer.**
Multilingual digital graphic display with embedded event log.
- Full compatibility with lead-acid and nickel-cadmium batteries, sealed or vented.
- **Large LCD display** User-friendly operation with large LCD display, touch screen optional with the choices of & languages made to order.
- **Smart Communication and Remote Monitoring** - Through isolated RS232, RS485, Ethernet. Full data logging.


Applications

BCN model PowerGenix Rectifier-Charger range suits all DC applications requiring a large battery back-up:

- Power Transmission and Distribution
- Continuous process industries
Oil and Gas and Petrochemical industries
Transportation (rail, metro, tramway)

Benefits

- **Flexible customization** power solutions to perfectly meet the specific requirements of customer's industrial applications.
- **Ruggedized solutions** to withstand harsh environments: extreme temperatures, humidity, dust and vibrations etc. Up to IP65 protection.
- **Complete power protection solutions**, including switch-gear, DC distribution, monitoring suite.

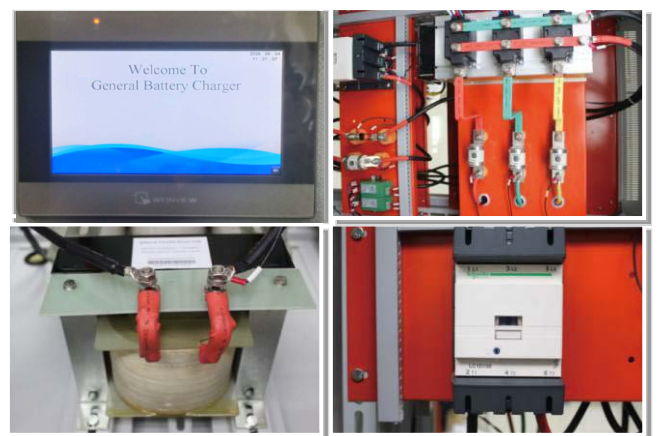

The picture is for reference only. Please refer to the actual order requirements or customized requirements.


The PowerGenix series consists mainly of a thyristor-controlled power unit and a microprocessor-controlled monitoring and control unit.

The following main components are included

- Mains input MCCB with contactor
- Mains transformer with separate windings
- Fully controlled 6 pulse three phase bridge with semi conductor protection fuse
- Smoothing chokes and capacitor bank to reduce ripple
- Control unit with digital set point setting
- Display and operation unit with touch screen
- Display on the front door
- Output fuse protect battery and load

Display and operation

- Display of charging voltage, current, charging mode, charging time and charging capacity; 5 charging steps are set, flexible and changeable, or the uniform floating charging interface can be customized;
- Multiple protection settings for charger protection
- Multiple language choices
- System date and time settings
- Brightness adjustment and password setting
- History alarm query and download
- Storage and import function of charging program

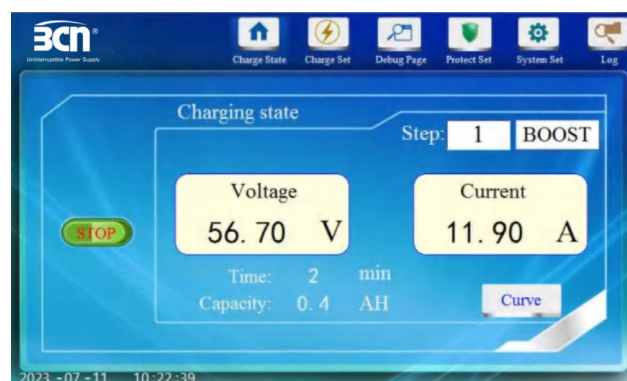

Comprehensive Industrial Chargers for Diversified DC Power Solution



(110V 200A)



(125V 50A)



(220V 100A)



(24V 300A)




(48V 50A)




(48V 10A)


Mode of Operation

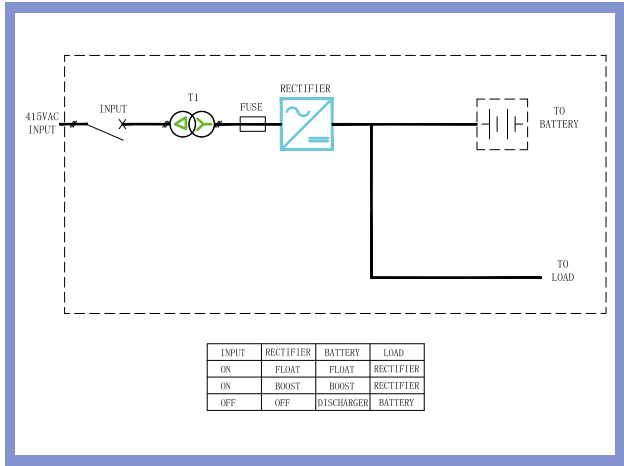


Battery Charger-Single Load-Single Battery

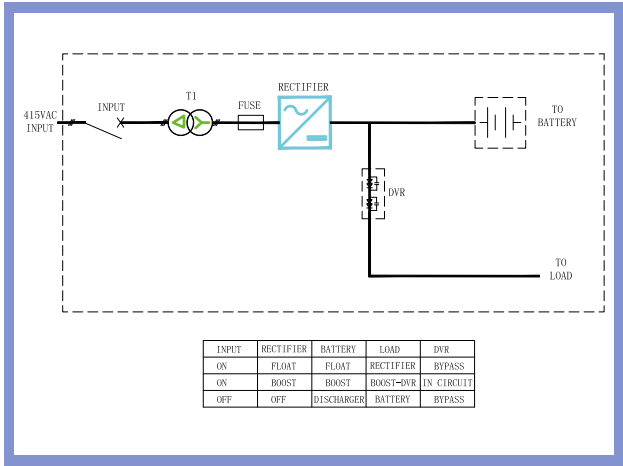


Battery Charger with Diode Dropper-Single Load-Single Battery

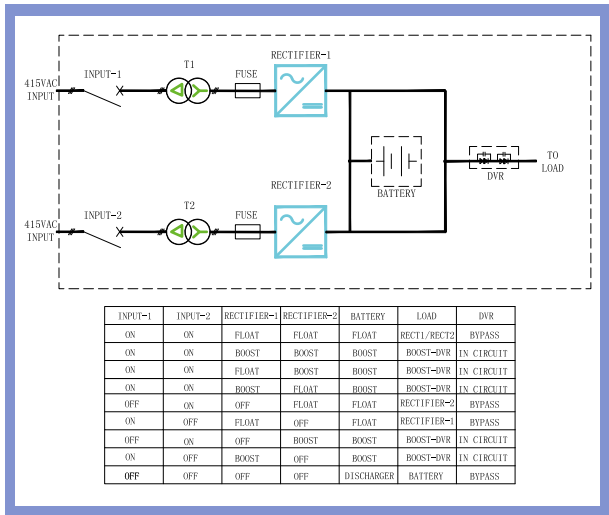

Redundant Float Cum Boost Charger with Diode Dropper-Single Load-Single Battery

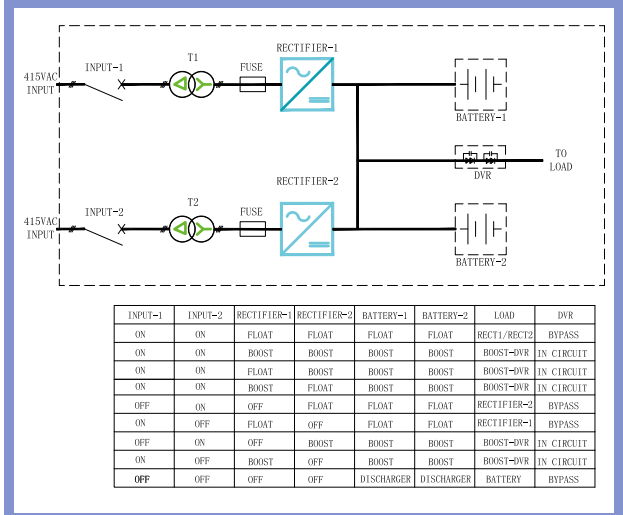

Redundant Float Cum Boost Charger with Diode Dropper-Single Load-Dual Battery Bank

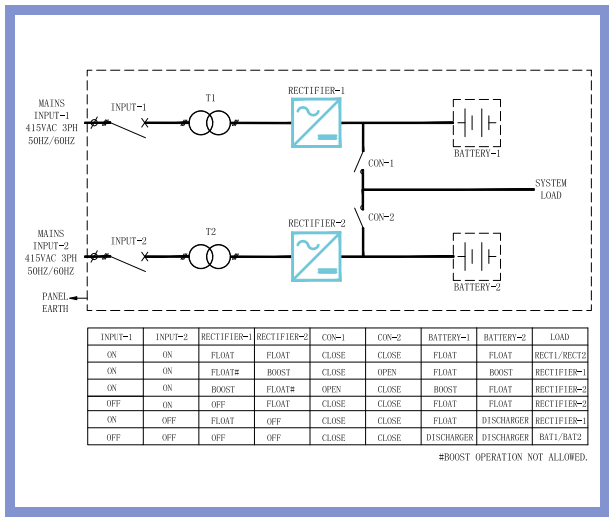

Redundant Float Cum Boost Charger-Single Load-Dual Battery Bank



DC Power supply / Industrial battery charger

Charger & Rectifier

24/48/110/125/220/240/400Vdc

Normal current 10-1500A

Technical Parameters

INPUT	
AC voltage	
-Single phase	1x230V (220,240)
-Three phase	3x400V (380,415)
Input voltage tolerance	±10%
Input Wiring	3 Phase 3 Wire or 3 Phase 4 Wires
Input frequency	50Hz(60Hz)
Input frequency tolerance	±5%
Input Protection	Thermic Magnetic Overcurrent protection via MCCB
OPTIONS	
Rectifier	Other input voltage(1x110 to 3x690VAC)
	Harmonic filter for THDi≤15%
	Blocking diode
	Surge and Lightning protections
Battery	Voltage ripple filter
	Battery circuit protection box
	Battery reversed polarity detection
	Battery low-voltage disconnection contactor (LVD)
System	Battery room temperature sensor
	Battery cabinet/ rack
	Battery monitoring system
	Parallel configurations
	Dropping diodes/DC-DC converter
	Earth fault monitoring
	Internal cabinet lighting
	Anti-condensation heater
	Output breaker
	Front-panel analog meters/digital meters
	DC distribution
	Temperature compensation
	AC high and AC low alarm/protection
	DC high and DC low alarm/protection
	AC fault alarm
	LED test function
Mechanical	Other frame colour
	Up to IP55 external
	Plate thickness
	Galvanized sheet
Communication	Front access maintenance
	Top cable entry
	Special keylock
	Specified cabinet identification (tag, nameplate)
	Modbus TCP/IP
	modbus RTU(RS 485)
	DNP3.0 protocol
	Volt-free contacts
	Transducers 4-20mA
	Remote monitoring

OUTPUT	
Nominal DC voltage	24/48/110/125/220/240/400
Output voltage range	0-1.5xnominal voltage (adjustable)
Nominal DC current	10-1500A
Output current range	0-1.1xnominal current(adjustable)
Voltage stability	±1% in float mode, input within tolerance
Voltage ripple	1% RMS (with battery connected)
Current Limitation	Battery current limitation can be adjusted
Filtering	L-C Filter
Output Protection	Short Circuit, NH Fuse and Overvoltage protection

BATTERY	
Type	Lead acid or nickel cadmium, vented or recombination and Lithium battery

COMMUNICATION	
Communication	RS 232, Modbus RTU

GENERAL DATA	
Operating temperature	0 to 50 °C
Storage temperature	-20 to +70 °C
Relative humidity	< 95 % non condensing
Operating altitude	1000 m max without derating
Cooling	Fan cooling or Natural cooling according to rating
Efficiency	90% according to rating
External protection	IP 20
Noise (at 1m in front of the unit)	55 – 65 dB according to rating
Cabinet color	RAL 7035
Dimensions	Varying according to ratings & options

STANDARDS	
IEC 60146-1-1:2009	Semiconductor converters - Specification of basic requirements
IEC 62040-1:2008+AMD1:2013	Uninterruptible power systems (UPS) - Part 1-2: General and safety requirements for UPS in restricted access locations
IEC 62040-2:2006	Uninterruptible power systems (UPS) – Part 2: Electromagnetic compatibility (EMC) requirements
IEC 61439-1:2011	Low voltage switchgear and controlgear assemblies - Part 1: General rules
IEC 60529:1989+AMD1:1999	Degrees of protection provided by enclosures (IP Code)
IEC 60076-11:2004	Power transformers – Part 11: Dry type transformers

EUROPEAN DIRECTIVES	
Low voltage directive: 2006/95/EC and 2014/35/EU	
EMC directive: 2004/108/EC and 2014/30/EU	
CE Mark	

BT CONNECT CO.,LTD

Head Office

Address: 2220/72 Soi Ramkhamhaeng 36/1, Ramkhamhaeng Road, Hua Mak, Bang Kapi, Bangkok 10240, Thailand

Contact

Tel. (66)2-374-5460 Auto 9 Lines, Fax. (66)2-374-6067

Website: www.btconnect.co.th; Email: info@btconnect.co.th

