

FIBER OPTIC CABLE

ARSS FIBER OPTIC DOUBLE JACKET

This specification covers design requirements and performance standards for procurement of fiber optic cables in the fiber industry. TSP brand guarantees a stable quality control system for us from the factory. Cable products pass several programs including ISO 9001, ISO 14001 and ROHS.

// PRODUCT DESCRIPTION

- Single Mode (9/125 μm)
- The cable shall be used for aerial or duct installed.
- Provide additional mechanical protection.
- low friction installation.
- Excellent protection from environmental hazards.
- Color code fiber and Loose tube in standard.

// APPLICATION

- Ethernet LAN Network, CCTV Camera , ETC
- Optical fibre cables supplied in compliance with this specifications is capable to withstand the typical service condition for a period of 30 years without detriment to the operation characteristics of the cable.
- Outdoor environment with high electric field strength in the Power communication system and the area where frequent thunder happens suitable for both aerial or duct installation.

// STANDARD

- IEEE802.3 (LAN, Ethernet Fast Ethernet, Gigabit Ethernet and 10 Gigabit Ethernet) ,10 G Ethernet, ATM, FDDI, FTTX,Fiber Channel,CATV, Communication
- TIA/EIA-598-A ,TIA/EIA-598-C, ANSI/TIA/EIA-568-B.3, ANSI/ TIA-568-C.3,ANSI/TIA/EIA-568-D.3, ANSI/ICEA640, EN 50173-1
- ISO/IEC 11801:2017, ISO/IEC 11801:2011(Ed.2.2)
- ASTM D1603 , ASTM D638 , ASTM D1693
- Telcordia (Bellcore) GR-20CORE
- IEC 60793-2B1.3, IEC 60794-1-2, ICEA696, IEC61034-2, IEC60754-2, IEC 60793, IEC 596
- ITU-T G.652D, ITU-TG 657A2
- RoHS Compliant
- TIS 2166-2548
- GB/T 12706-2008 Standard



// CONSTRUCTION CABLE

Number of fibers		6-24	36-60	72	96
Loose Tube	Multi-Twisted Tube				
	Material	PBT (Polybutylene Terephthalate) with color coding			
	Filling Compound	Thixotropic Jelly Compound			
	Fiber per Tube	6	12	12	12
	Number	1-4	3-5	6	8
Filler Rod	Material	Plastic rod, natural color			
	Number	4-1	2-0	0	0
	Diameter	2.2 ± 0.1 mm.			
Stranding	Method	Reverse oscillating lay (ROL) technique (SZ Direction)			
Central Strength Member	Material	FRP (Fiberglass Reinforce with Plastic)			
	Color	Natural			
Water Blocking Yarn	Material	Suitable Water Swellable Materials (Dry-Core Technology)			
Binder & Wrapping	Material	Polyester yarns			
Water Blocking Tape	Thickness	0.3 ± 0.05 mm.			
Ripcord	Material	Polyester			
	Number	2			
Additional Strength Member	Material	Water blocking E-glass yarn (aramid yarn is available on request)			
Armored	Material	Corrugated chrome steel tape coated with polymer to prevent rodents (AR)			
	Thickness	Steel & Polymer coating : 0.25 mm.			
Outer Sheath	Material	UV-Proof, Black HDPE (non Rodent Repellent/Rodent Repellent(LS2))			
	Thickness(Approx.)	1.6 ± 0.2 mm.			
Cable Diameter (Approx.)		10.3 ± 1 mm.	10.7 ± 1 mm.	11.2 ± 1 mm.	12.4 ± 1 mm.
Cable Weight (Approx.)		90 ± 10kg./km.	100 ± 10kg./km.	110 ± 10kg./km.	135 ± 10kg./km.
Temperature Range	Operation Temperature	-40°C to +70°C			
	Installation Temperature	-40°C to +70°C			
	Storage/Shipping Temperature	-40°C to +75°C			
Numerical Aperture		0.130 ± 0.010			

// OPTICAL FIBER CHARACTERISTICS

CATEGORY	DESCRIPTION	SPECIFICATIONS
Optical Specifications		ITU-T G.652D(Singlemode OS2) 9/125 μm (OS2) ITU-T G651(Multimode) 62.5/125 μm , 50/125 μm
Attenuation	@1310nm	$\leq 0.35/\leq 0.33\text{dB/km}$
	@1383nm	$\leq 0.35/\leq 0.31\text{dB/km}$
	@1490nm	$\leq 0.24\text{db/km}$
	@1550nm	$\leq 0.21/\leq 0.19\text{dB/km}$
	@1625nm	$\leq 0.23/\leq 0.20\text{dB/km}$
Attenuation discontinuity		$\leq 0.05\text{ dB}$
Attenuation vs. Wavelength	1285 -1330 @1310nm	$\leq 0.05\text{ dB/km}$
	1525 -1575@1550nm	$\leq 0.05\text{ dB/km}$
Zero dispersion wavelength		1300 -1324 nm
Zero dispersion slope		$\leq 0.092\text{ ps}/(\text{nm}^2.\text{km})$
Dispersion	@1310nm	$\leq 3.5\text{ ps/nm.km}$
	@1550nm	$\leq 18\text{ ps/nm.km}$
Polarization mode dispersion(PMD)		$\leq 0.2\text{ ps/km } \frac{1}{2}$
Cable cutoff wavelength (λ_{cc})		$\leq 1260\text{ nm}$
Effective group index of reaction	@1310nm	1.4676
	@1550nm	1.4682
Geometric Specifications		
Mode field diameter	@1310nm	$9.2 \pm 0.6\text{ }\mu\text{m}$
	@1550nm	$10.4 \pm 0.8\text{ }\mu\text{m}$
Cladding diameter		$125 \pm 1\text{ }\mu\text{m}$
Coating Diameter, Primary		$242 \pm 5\text{ }\mu\text{m}$
Coating Diameter, Secondary		$250 \pm 5\text{ }\mu\text{m}$
Cladding non -circularity		$\leq 1.0\%$
Coating Material	Material	UV curable acrylate
	Diameter	$250 \pm 5\mu\text{m}$
Coating/Cladding concentricity error		$\leq 12\text{ }\mu\text{m}$
Core/Cladding concentricity error		$\leq 0.5\mu\text{m}$
Color Fiber Diameter		$250\text{ }\mu\text{m} \pm 15\text{ }\mu\text{m}$ (Colored)
Fiber proof-tested		0.69 GPa (1.0%, 100kpsi) in accordance with the optical fiber proof test by IEC 60793-1-30

// OPTICAL FIBER CHARACTERISTICS

CATEGORY	DESCRIPTION	SPECIFICATIONS
Mechanical Specifications		
Proof test level		$\geq 1.0\%$
Fiber curl radius		≥ 4.0 m
Peak coating strip force		1.3 - 8.9N
Relative humidity		Up to 90%, no frost
Maximum Span Length	Sag 0.5%	40 m.
	Sag 1.0%	80 m.
Maximum Wind Velocity		126 km./hr.
Max. Tensile load	Installation	3,600 N. for 6-96 Cores
	Operation	2,500 N. for 6-96 Cores
Maximum Crush resistance		3,400 N./10 cm.
Minimum bending Radius	Installation	20 x Diameter of Cable
	Operation	10 x Diameter of Cable
Thermal oxidative stability (OIT-Test)		OIT at 200 °C > 40 min (IEC 60811-410)

// IDENTIFICATION COLOR CODE OF FIBER AND LOOSE TUBE

The color code of the loose tubes and the individual fibers within each loose tube shall be in accordance TIA/EIA-598-C (Rev.TIA/EIA-598-A) and EIA-359-A

NO.	FIBER COLOR	LOOSE TUBE COLOR
1	Blue	Blue
2	Orange	Orange
3	Green	Green
4	Brown	Brown
5	Slate	Slate
6	White	White
7	Red	Red
8	Black	Black
9	Yellow	Yellow
10	Violet	Violet
11	Rose	Rose
12	Aqua	Aqua

// PACKING AND DRUM

Standard reel length: 4 km/reel, other length is also available. The cables are packed in fumigated wooden drums.

Unless otherwise specified, the cable sheath marking shall be as follows:


- Color: white.
- Contents: TSP, the year of manufacture, the type of cable, cable number, length marking , Name of organization in English, Thai, Chinese, etc.
- Format to choose from: screen, hot stamp, laser.
- Interval: 1 m.

(Outer sheath marking legend can be changed according to user's requests.)

// TEST REQUIREMENTS

Item	Method	Acceptance criteria
Tensile test	- Max. tensile strength: 3000 N	-Fiber strain at maximum
IEC 60794-1-2-E1A	- Sample length: 100 meter	-Load max. 0.33 %
TIA/EIA-455-33A	- Times: 1 hour	-Attenuation increase ≤ 0.1 dB
Crush or Compression test	- Load: 2200 N	-No splits or cracks in the outer jacket
IEC 60794-1-2-E3	- Time: 10 minute	-Attenuation increase ≤ 0.10 dB
TIA/EIA-455-41A	- Length: 100 m	
Impact test	- Impact energy: 450	- No splits or cracks in the outer jacket
IEC 60794-1-2-E4	- Height: 1 meter	-Attenuation increase ≤ 0.10 dB (after the test)
TIA/EIA-455-25C	- Impact points: min. - Number of impacts:	
Torsion or Twist test	- 1 m cable length with 150 N weight	- No splits or cracks in the outer jacket
IEC 60794-1-2-E7	- $\pm 180^\circ$,10 cycle	-Attenuation increase ≤ 0.10 dB (after the test)
TIA/EIA-455-85A		
Repeated bending Cable bending Test	- Radius = 20 $\times$ cable outer diameter - 1m cable length with 150 N weight, 30 cycle	- No splits or cracks in the outer jacket -Attenuation increase ≤ 0.10 dB (after the test)
IEC 60794-1-2-E6, TIA/EIA-455-104A IEC 60794-1-2-E11B		
Temperature cycling test	- Temperature step: +20 $^\circ$ C -40 $^\circ$ C+70 $^\circ$ C-40 $^\circ$ C +70 $^\circ$ C+20 $^\circ$ C	-Attenuation variation for reference value(the attenuation to be measured before test at +20 $\pm$ 3) ≤ 0.10 dB/km
IEC 60794-1-2-F1 TIA/EIA-455-3A	- Time per each step: 16 hrs. - Number of cycles: 2 cycles	
Water penetration test	- Water height: 1	-No water leakage at the end of the sample
IEC 60794-1-2-F5	- Sample length:3	
TIA/EIA-455-82B	- Duration of test: 24hr	
Drip test	- Five 0.3m samples suspended vertically in a climatic chamber, raised temperature to +70 $^\circ$ C	-No filling compound shall drip from tubes after 24 hrs.
IEC 60794-1-2-E14		

STRUCTURE DESIGN

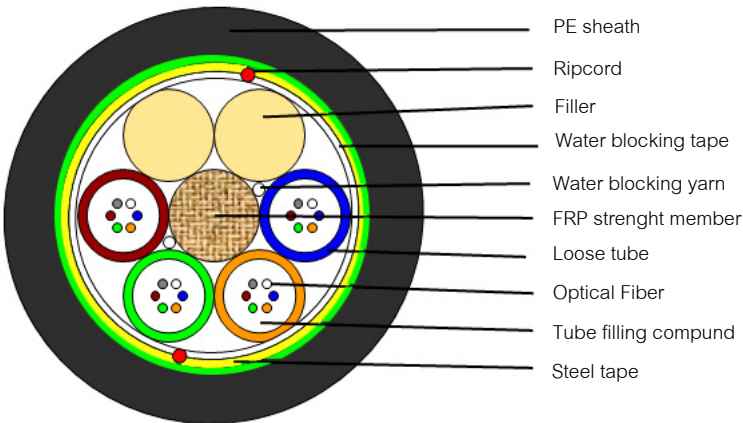

ORDER INFORMATION

NO. OF CORE	DESCRIPTION
6	Indoor/Outdoor, 6C ARSS, Single Jacket, Single Mode 9/125 μm
12	Indoor/Outdoor, 12C ARSS, Single Jacket, Single Mode 9/125 μm
24	Indoor/Outdoor, 24C ARSS, Single Jacket, Single Mode 9/125 μm
48	Indoor/Outdoor, 48C ARSS, Single Jacket, Single Mode 9/125 μm
60	Indoor/Outdoor, 60C ARSS, Single Jacket, Single Mode 9/125 μm
96	Indoor/Outdoor, 96C ARSS, Single Jacket, Single Mode 9/125 μm
120	Indoor/Outdoor, 120C ARSS, Single Jacket, Single Mode 9/125 μm



*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by Rabbit Innovation.,ltd

WWW.TSPNEXT.COM

