



โปรเจคเตอร์ PG706HD


คีย์ คุณสมบัติ

- Full HD 1080p Resolution
- 4000 ANSI lumens
- Digital Vertical Lens Shift
- Dual HDMI
- Up to 20,000 lamp hour
(SuperEco+ mode)



สินค้า รายละเอียด

The ViewSonic PG706HD features 4000 ANSI lumens of brightness to project the finest of details in any ambient setting. High brightness and a Full HD 1920 x 1080 resolution provide you with perfect projection in any medium sized space, such as a meeting room or classroom. The PG706HD comes with an energy-saving SuperEco+ mode that reduces power consumption and extends lamp life to 20,000 hours, reducing the frequency of lamp replacement and lowering maintenance costs. In addition to dual HDMI, Video, S-Video, and VGA, the projector is integrated with RS232 and LAN, certified by Crestron, AMX, PJ Link and Extron networkable solutions, making it easy to control and monitor the projector remotely.

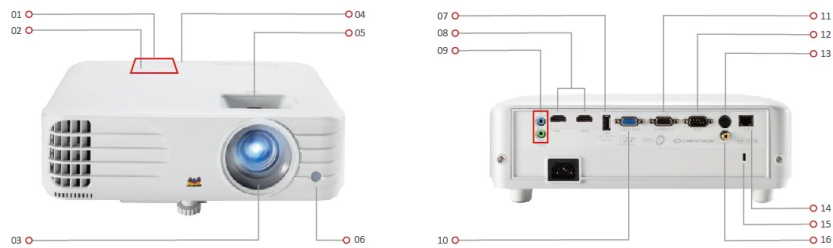

1. Keypad
2. LED Indicator
3. Lens
4. Power Keypad
5. Zoom/Focus
6. Front IR
7. USB Type A

8. HDMI Port
9. Audio In / Out
10. Computer In
11. Computer Out
12. RS-232
13. S-Video
14. RJ45

15. Kensington Lock
16. Video

เยี่ยมชม เรา www.viewsonic.com

SPECIFICATION

| | |
|------------------------------------|---|
| Native Resolution: | 1920x1080 |
| DMD Type: | DC3 |
| Brightness: | 4000 ANSI Lumens |
| Contrast Ratio with SuperEco Mode: | 12000:1 |
| Display Color: | 1.07 Billion Colours |
| Light Source Type: | Lamp |
| Light Source Life (Normal): | 4000 |
| Light Source Life (SuperEco): | 20000 |
| Lamp Watt: | 245W |
| Lens: | F=2.0~2.05, f=15.843-17.445mm |
| Projection Offset: | 110%+/-6% |
| Throw Ratio: | 1.5-1.65 |
| Optical Zoom: | 1.1x |
| Digital Zoom: | 0.8x-2.0x |
| Image Size: | 30"-300" |
| Throw Distance: | 1.00m-10.96m (100"@3.32m) |
| Keystone: | +/- 40° (V) |
| Lens Shift V. Range: | Yes (+/- 5%) |
| Audible Noise (Normal): | 32dB |
| Audible Noise (Eco): | 27dB |
| Input Lag: | 16ms |
| Resolution Support: | VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB-Reduced Blanking |
| HDTV Compatibility: | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p |
| Video Compatibility: | NTSC, PAL, SECAM |
| Horizontal Frequency: | 15K-102KHz |
| Vertical Scan Rate: | 23-120Hz |

INPUT

| | |
|-------------------------------------|------------------------|
| Computer in (share with component): | 1 |
| Composite: | 1 |
| S-Video: | 1 |
| HDMI: | 2 (HDMI 1.4/ HDCP 1.4) |
| Audio-in (3.5mm): | 1 |
| RJ45 Input: | 1 (LAN control) |

OUTPUT

| | |
|---------------------|--------------|
| Monitor out: | 1 |
| Audio out (3.5mm): | 1 |
| Speaker: | 10W |
| USB Type A (Power): | 1 (5V/ 1.5A) |

CONTROL

| | |
|------------------------|---|
| RS232 (DB 9-pin male): | 1 |
| RJ45: | 1 |

OTHERS

| | |
|--|----------------------------------|
| Power Supply Voltage: | 100-240V+/- 10%, 50/60Hz (AC in) |
| Power Consumption: | Normal: 355W Standby: <0.5W |
| Operating Temperature: | 0~40°C |
| Net Weight: | 2.79kg |
| Dimensions (WxDxH) with Adjustment Foot: | 312x222x108mm |

| | |
|---------------|---|
| OSD Language: | English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages |
|---------------|---|

STANDARD ACCESSORY

| | |
|-----------------|----------------------|
| Power Cord: | 1 |
| VGA Cable: | 1 |
| Remote Control: | 1 (w/ laser pointer) |
| QSG: | 1 |

OPTIONAL ACCESSORY

| | |
|--------------------|---------|
| Lamp/Light Source: | RLC-120 |
|--------------------|---------|