

# ViewSonic® โปรเจคเตอร์ PG707X


## คีย์ คุณสมบัติ

- 4,000 ANSI Lumens offering bright images in any environment
- Larger screen size with lower cost-per-inch
- Throw ratio match & 1.3x zoom for hassle-free equipment upgrade
- Energy-efficient 20,000 hours lamp life
- Comprehensive LAN control for efficient management



## สินค้า รายละเอียด

ViewSonic PG707X is a practical 4,000 ANSI Lumens XGA business/education projector. With a throw ratio match for mainstream installation conditions and 1.3x optical zoom, it serves as a hassle-free upgrade choice for users to easily get bright and large images with low cost-per-inch in small-to-medium meeting/training rooms. Adding on to that are the energy-efficient 20,000 hours long lamp life and comprehensive LAN control compatibility, making it even more favorable to cost-effective and efficient management.

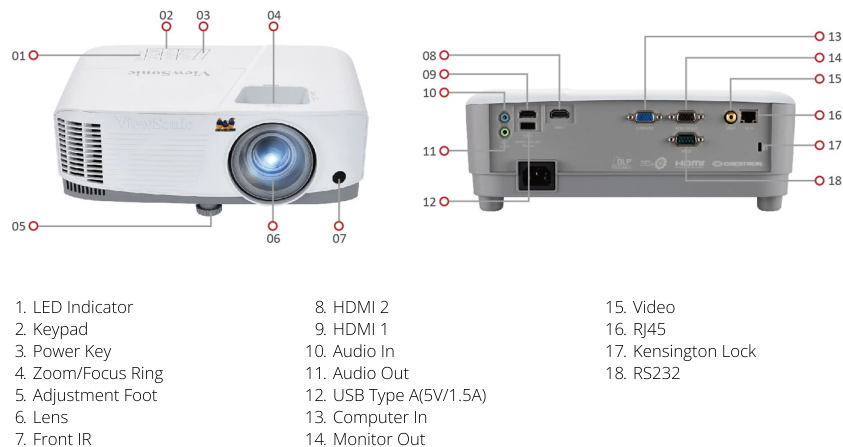

เยี่ยมชมเรา  [www.viewsonic.com](http://www.viewsonic.com)

**SPECIFICATION**

|   |  |
|---|--|
| Native Resolution:                            | 1024x768                                   |
| DMD Type:                                     | DC3  |
| Brightness:                                   | 4000 (ANSI Lumens)                         |
| Contrast Ratio with SuperEco Mode:            | 22000:1                                    |
| Display Color:                                | 1.07 Billion Colors                        |
| Light Source Type:                            | Lamp                                       |
| Light Source Life (hours) with Normal Mode:   | 6000                                       |
| Light Source Life (hours) with SuperEco Mode: | 20000                                      |
| Lamp Watt:                                    | 203W                                       |
| Lens:   | F=2.59-2.87, f=16.88-21.88mm               |
| Projection Offset:                            | 115%+/-5%                                  |
| Throw Ratio:                                  | 1.51-1.97                                  |
| Optical Zoom:                                 | 1.3x                                       |
| Digital Zoom:                                 | 0.8x-2.0x                                  |
| Image Size:                                   | 30"-300"                                   |
| Throw Distance:                               | 0.9m-12m, (100"@3.1m)                      |
| Keystone:                                     | H:+/-40° , V:+/-40°                        |
| Audible Noise (Normal):                       | 32dB                                       |
| Audible Noise (Eco):                          | 28dB                                       |
| Input Lag:                                    | 16ms                                       |
| Resolution Support:                           | VGA(640 x 480) to FullHD(1920 x 1080)      |
| HDTV Compatibility:                           | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p |
| Video Compatibility:                          | NTSC, PAL, SECAM                           |
| Horizontal Frequency:                         | 15K-102KHz                                 |
| Vertical Scan Rate:                           | 23-120Hz                                   |

**INPUT**

|                                     |                        |
|-------------------------------------|------------------------|
| Computer in (share with component): | 1                      |
| Composite:                          | 1                      |
| HDMI:                               | 2 (HDMI 1.4/ HDCP 1.4) |
| Audio-in (3.5mm):                   | 1                      |

**OUTPUT**

|                     |             |
|---------------------|-------------|
| Monitor out:        | 1           |
| Audio out (3.5mm):  | 1           |
| Speaker:            | 10W         |
| USB Type A (Power): | 1 (5V/1.5A) |

**CONTROL**

|                        |   |
|------------------------|---|
| RS232 (DB 9-pin male): | 1 |
| RJ45 (LAN control):    | 1 |

**OTHERS**

|  |   |
|--|---|
| Power Supply Voltage:                    | 100-240V+/- 10%, 50/60Hz, (AC in)   |
| Power Consumption:                       | Normal: 280W, Standby: <0.5W  |
| Operating Temperature:                   | 0~40°C  |
| Net Weight:                              | 2.35kg  |
| Dimensions (WxDxH) with Adjustment Foot: | 294x218x110mm   |
| OSD Language:                            | English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages |

**STANDARD ACCESSORY**

|                 |                        |
|-----------------|------------------------|
| Power Cord:     | 1                      |
| VGA Cable:      | 1                      |
| Remote Control: | 1 , (w/ laser pointer) |
| QSG:            | 1                      |