PLANT REMODELING





Strip Doors and Accessories	2
Mesh Curtain Strips	3
Air Doors	4
Curtains and Roll-Up Doors	5
Flexible Doors	6
Traffic Doors	9
Personnel and Interior Doors	0
Cold Storage Doors and Parts	3
LED Fixture	4
Shatterproof Light Bulbs	4
Fluorescent Low Bay Fixtures	5
Fluorescent Low Bay Fixtures	7
Fluorescent Low Bay Fixtures	7 7
Fluorescent Low Bay Fixtures	7 7 8
Fluorescent Low Bay Fixtures	7 7 8 0
Fluorescent Low Bay Fixtures	7 7 8 0
Fluorescent Low Bay Fixtures 555 Washdown Light Fixtures 556-557 LED Lighting Fixtures 557 LED Emergency Lighting 558 Ceiling Panels and Systems 559-560 Stainless Steel Corners 560	7 7 8 0 0
Fluorescent Low Bay Fixtures 555 Washdown Light Fixtures 556-557 LED Lighting Fixtures 557 LED Emergency Lighting 558 Ceiling Panels and Systems 559-560 Stainless Steel Corners 560 Wall Coverings and Accessories 560-561	7 7 8 0 0 0
Fluorescent Low Bay Fixtures555Washdown Light Fixtures556-557LED Lighting Fixtures557LED Emergency Lighting558Ceiling Panels and Systems559-560Stainless Steel Corners560Wall Coverings and Accessories560-561Floor Coatings562	7 7 8 0 0 0 1 2 3

Template Kit



Simplifies the process

of cutting bulk roll material into individual door strips.

- Fabricated of non-slip 1/4-inch acrylic.
- Dimensions are permanently etched directly on the template.
- Special drill bit bores a perfectly round hole into material to prevent tearing.
- Kit includes template, drill bit and marker.



How to figure the AMOUNT OF STRIP NEEDED

We recommend mounting these doors 1 foot above door opening to eliminate tearing strips with tall loads.

- 1. Measure the opening width and height in feet.
- **2. Add** 1 foot to the door height and width, depending on space available.
- 3. Calculate using the following formula in feet:
 - 6" Strips (width x height) x (1-1/2) x (2)
 - 8" Strips (width x height) x (1-1/2) x (1-7/10)
 - 12" Strips (width x height) x (1-1/2)

All strip doors are designed to mount on either the inside or outside wall above the door opening with a minimum of 5" overlap on each side.



8-inch PVC Strips 50% overlap



8-inch PVC Strips 100% overlap

Clear Antibacterial Door Strips

Antibacterial properties are blended into the compound to inhibit the growth of bacteria — will not wash out!

- Proven to kill 99.9% of bacteria like e-coli, staph and pneumonia on the surface of the PVC strip.
- Made of clear, high-quality durable vinyl, resists scratching and remains pliable in cold.
- Effective airflow, dirt and moisture block. Can be used in walk-ins and food storage areas.

G368 10381 Clear	ROLL	THICKNESS	LENGTH	WIDTH	COLOR	ITEM NO.
000 000	\$289.95	0.080"	300 ft	6"	Clear	G368 10381
G368 20471 Clear	264.95	0.080"	150 ft		Clear	G368 20471
G368 20481 Clear	397.95	0.120"	100 ft		Clear	G368 20481





Bulk PVC Colored Door Strips, For Applications Above 32 °F Only

				F.O.B	. FACTORY
ITEM NO.	COLOR	WIDTH	LENGTH	THICKNESS	ROLL
G368 2800	Anti-Insect Yellow Durarib™	.8"	. 150 ft	.0.080"	\$251.95
G368 2801	Anti-Insect Yellow Durarib™	.12"	. 150 ft	.0.110"	526.95
G368 2802	Opaque Black	.8"	.300 ft	.0.080"	424.95
G368 2803	Safety Orange	.8"	.300 ft	. 0.080"	475.95
G368 2804	Safety Orange	.12"	.300 ft	.0.120"	701.95
G368 2805	ScreenFlex™ Bronze	.8"	.300 ft	.0.080"	449.95
G368 2806	ScreenFlex™ Red	.8"	.300 ft	.0.080"	449.95
G368 2807	ScreenFlex™ Green	.8"	.300 ft	.0.080"	449.95











Quickstrip Perforated Pre-Punched PVC Strip Door Material

Fastest, most convenient way to replace worn strips.

- Perforated edge allows you to neatly remove individual strips for quick and easy installation.
- Each strip is pre-punched on 2-inch centers to fit most studded mounting hardware no tools needed.

					F.O.B	. FACTORY
ITEM NO.	COLOR	WIDTH	LENGTH	STRIPS/ROLL	THICKNESS	ROLL
G368 2902	Standard Smooth	.8"	. 84"	.7	. 0.080"	\$106.95
G368 2901	Standard Durarib™	.8"	. 96"	.9	. 0.072"	166.95
G368 2900	Standard Smooth	.8"	. 96"	.9	. 0.080"	146.95
G368 2903	Low Temp Reinforced	.8"	. 84"	.7	. 0.080"	119.95
G368 2904	Standard Smooth	.8"	. 120"	.7	. 0.080"	146.95
G368 2905	Standard Durarib™	.8"	. 120"	.7	. 0.072"	186.95
G368 2906	Standard Smooth	.12"	. 120"	.7	. 0.120"	304.95
G368 2907	Standard Smooth	.12"	. 144"	. 6	. 0.120"	318.95
G368 2908	Standard Durarib $^{\text{TM}}$. 12"	. 144"	. 6	. 0.110"	359.95



MADE IN

USA


Aluminum HD Strip Door Mounting Hardware


- 70% faster installation time 90% faster strip replacement time.
- One-piece, heavy-duty 1/4-inch thick aluminum construction won't rust or corrode.
- Use 3/8-inch bit to drill holes in strip material or template kit shown on facing page.
- 2-inch sections snap together. Includes installation instructions.





Scan this QR code with your mobile device to watch a video showing the difference between the door mounting hardware options.





NOTE: Purchase Quickmount™ Hardware and Strips and get Quickmount™ Template for FREE! CALL FOR DETAILS.

F.O.B. FACTORY EACH

 ITEM NO.
 PRODUCT
 EACH

 G368 27021
 2" Section Mounting Hardware
 \$32.95

Bolt-On Universal Galvanized Hardware

A heavy-duty mounting system used when maximum strength and durability are required.

- Each section comes complete with retaining plates and lock-nuts to secure the strips.
- Made from heavy-duty galvanized steel for ultra-heavy traffic applications.
- Strips held in place by galvanized steel retaining plates and lock nuts.
- Can be mounted on the face of the wall or under the lintel.

For Door Strips ➤ SEE PAGES 540-542







uickMountHD

ITEM NO.	PRODUCT
G368 00031	3 ft. Section
G368 00071	4 ft. Section

SPECIAL ORDER ITEM

WHY REPLACE DOOR STRIPS?

- Old strips harbor bacteria in the cuts and cracks that form as a result of impact.
- Worn and scratched strips cut down on visibility and safety.
- Maintain Temperature Integrity Worn out strips have holes and cracks which allows cold air to escape and warm air to infiltrate.
- To reduce the transfer of contaminates between work areas.

E-Z Hang™ Clear Vinyl Door Strips

The BEST door strip program available!

• Able to withstand heavy traffic including forklifts. • Made from a non-phthalate formulation.

Standard Applications

Smooth — Clear

ITEM NO.	WIDTH	LENGTH	THICKNESS	ROLL
G368 5092	6"	. 300 ft	. 0.060"	\$251.95
G368 2102	8"	. 150 ft	. 0.060"	226.95
G368 2104	12"	. 100 ft	. 0.120"	334.95
G368 2106	16"	. 100 ft	. 0.160"	565.95

Ribbed — Clear

ITEM NO.	WIDTH	LENGTH	THICKNESS	ROLL
G368 2107	8"	. 150 ft	. 0.072"	\$238.95
G368 2108	12"	. 150 ft	. 0.110"	526.95
G368 2109	16"	. 100 ft	. 0.144"	616.95

Below 32° Applications — Low-temp strip for freezer applications.

Smooth — Clear

ITEM NO.	WIDTH	LENGTH	THICKNESS	ROLL
G368 0092	8"	. 150 ft	. 0.080"	\$238.95
G368 2112	12"	. 100 ft	. 0.120"	372.95
G368 10311	16"	. 100 ft	. 0.160"	623.95

Reinforced — Clear

ITEM NO.	WIDTH	LENGTH	THICKNESS	ROLL
G368 10321	6"	. 300 ft	. 0.060"	\$264.95
G368 10331	8"	. 300 ft	. 0.080"	462.95
G368 10341	12"	. 200 ft	. 0.120"	623.95

Ribbed — Clear

ITEM NO.	WIDTH	LENGTH	THICKNESS	ROLL
G368 10351	6"	. 150 ft	. 0.072"	\$264.95
G368 10361	8"	. 150 ft	. 0.110"	565.95
G368 10371	12"	. 100 ft	. 0.144"	687.95

NOTE: Other sizes available. Call for more information.

Standard Smooth Clear PVC Strip Curtain

- Versatile, economical material for cooler temperatures or ambient applications.
- Temperature range: +150 °F to -10 °F.
- Install strips faster, easier and without tools with the exclusive QuickMount HD aluminum mounting hardware.

► SEE PAGE 541 For QuickMount™ HD Mounting Hardware

					O.B. FACTORY
ITEM NO.	DOOR SIZE WIDTH X HEIGHT	STRIP SIZE WIDTH	GAUGE	OVERLAP%	ROLL
G368 0027	3' x 7'	6"	0.060"	. 67%	\$141.95
G368 0026	4' x 7'	6"	0.060"	. 67%	192.95
G368 0025	4' x 8'	. 6"	0.060"	. 67%	192.95
G368 0024	3' x 7'	. 8"	0.080"	. 50%	128.95
G368 0023	4' x 7'	. 8"	0.080"	. 50%	179.95
G368 0022	4' x 8'	. 8"	0.080"	. 50%	192.95
G368 0021	5' x 7'	. 8"	0.080"	. 50%	205.95
G368 0020	5' x 8'	. 8"	0.080"	. 50%	231.95
G368 0019	6' x 7'	. 8"	0.080"	. 50%	256.95
G368 0018	6' x 8'	. 8"	0.080"	. 50%	295.95
G368 0017	8' x 8'	. 8"	0.080"	. 50%	347.95
G368 0016	8' x 8'	. 12"	0.120"	. 67%	424.95
G368 0015	8' x 10'	. 12"	0.120"	. 67%	513.95
G368 0014	10' x 8'	. 12"	0.120"	. 67%	526.95
G368 0013	10' x 10'	. 12"	0.120"	. 67%	642.95
G368 0012	10' x 12'	. 12"	0.120"	. 67%	758.95
G368 0011	12' x 12'	. 12"	0.120"	. 67%	899.95
G368 0010	12' x 14'	. 12"	0.120"	. 67%	1,028.95
G368 0009	14' x 12'	. 12"	0.120"	. 67%	1,053.95
G368 0008	14' x 14'	. 12"	0.120"	. 67%	1,182.95



Flexible PVC Impact DoorsAs all doors are custom made, price varies by size.

700 Series Door

- Clear, flexible 0.275-inch or 0.254-inch PVC material.
- Smooth, easy swing action.
- Adjustable torsion.
- Maximum visibility and safety.
- Easy installation and panel replacement.
- Low maintenance.
- Designed for medium to heavy-duty applications.
- Available in three panel types: standard clear, low-temp clear and standard reinforced.

1000 Series Door

- Heavy-duty, clear 0.354-inch PVC material.
- Tough, durable construction.
- Adjustable torsion spring hinge.
- Replaceable top and jamb wipers.
- Available in two panel types: standard and low-temp clear.











Impact plates available in both Series



CALL 800-456-5624 FOR PRICING AND INFORMATION

ORDER A DOOR

Please have the following information available.

Exact finished opening size (inches): Width _____ Height _

Temperature: Inside _____ Outside ___ **Type of traffic:** □ People □ Carts

BUNZL | **KOCH** Supplies

AirFlex® Mesh Barrier Strip Curtain Door System

Allows cool, fresh air in while keeping bugs and flying insects out.

- 8-inch wide mesh strips are made of 12-ounce PVC coated polyester for long life and durability. Strips come in 7 feet and 8 feet lengths.
- 12-inch clear PVC footer acts as a weight for straight hanging and can be field modified for a perfect fit.
- Replacement strips available.

NOTE: Cut to Size.

Call with opening size for pricing.





ORDER MESH OR PERFORATED STRIPS

Please have the following information available.

Exact finished opening size (inches): Width _____ Height ____

Width of strips: ☐ 8" ☐ 12" Mounting: ☐ Undermount ☐ Wall Mount

Color (Mesh): Yellow Color (Perforated): ☐ Amber ☐ Clear

F.O.B. FACTORY

 ITEM NO.
 PRODUCT
 EACH

 1036 4050
 AirFlex® Strip Door System
 CALL

FOR PRICING





Berner[™] International Air Doors

FDA, USDA, NSF and UL listed.

- Galvanized steel fan wheels and housings.
- Aluminum airfoil shaped directional vanes.
- Aluminum base frame.
- White aluminum or stainless steel housing.
- Keyhole slots in backplate for quick wall mounting.
- Licensed to bear AMCA Air Performance Seal.
- Five year parts warranty.
- Perfect for customer entry doors, receiving doors, patio doors, dock doors, walk-in coolers, drive-up windows and concession windows.

NOTE: Also available in ambient, electric heat, steam heat and hot water heat.





CALL 800-456-5624

FOR PRICING AND INFORMATION

ORDER AIR DOORS

Please have the following information available.

Exact finished opening size (inches): Width _____ Height ____ Controlling: ☐ Temperature ☐ Dust ☐ Insects ☐ Fumes

MADE IN

SPECIAL

ORDER

ITEM

F.O.B. FACTORY

Air door.

Voltage Requirements: ☐ 110 ☐ 220 ☐ 440 Door Usage: ☐ Run for short periods ☐ On constantly ☐ Start and run when door opens

Phasing: ☐ Single ☐ Three (requires starter panel) Mounting Location: ☐ Interior ☐ Exterior Opening Type: ☐ Cooler/Freezer ☐ Dock ☐ Service ☐ Retail ☐ Other____



PRICES ARE SUBJECT TO CHANGE • MINIMUMS MAY APPLY • VISIT OUR WEBSITE FOR CURRENT PRICING

Washdown Curtain Walls and Clean Curtains

Reduce process line down time during washdown cycles.

- Custom sized to meet any cleaning or sanitation requirement.
- Constructed with non-porous PVC material.
- Prevent cross contamination between processing lines.
- Wash spray can hit all surfaces.
- Improves plant sanitation.

ITEM NO. PRODUCT







F.O.B. FACTORY

CUT TO



Open trolley design to prevent bacteria from forming.



SPECIAL ORDER

ITEM

Climate Curtains

- Double-paneled 18-ounce coated vinyl curtain walls lined with ThinsulateTM Ultra insulation from 3MTM.
- Flexible, climate control isolation for a variety of applications including freezer and cooler areas, loading docks, food processing lines and warehouse separation.
- Thermal valance and floor sweep.









Overlapping panel design.



ITEM NO. PRODUCT
B399 1001 Climate Curtains

F.O.B. FACTORY

CUT TO

SIZE



Vinyl and Mesh Roll-Up Doors

CALL 800-456-5624

FOR PRICING AND INFORMATION

Washdown Curtains . . .

Clean Curtains.....

Complete kit ready to install!

Benefits:

B399 2100

B399 1059

- Significantly reduces heat loss while allowing light into work areas.
- Keeps out unwanted pests, birds and intruders.
- Controls airborne contaminants and improves building appearance.
- Mesh allows fresh air to flow through for comfort and productivity and helps meet FDA and AIB requirements.
- Three year warranty one year warranty on motor drive mechanism.

Features:

- High speed: up to 36 inches per second.
- Low maintenance: no cables, wheels, springs or sewn construction.
- Wind load rated: 45 mph wind load*.
- Durable: fiberglass windbars won't bend or break. Automatically resets after impact.
- Quick and easy installation: upper box completely assembled in factory.
- Multi-season: exchangeable panels available in mesh, clear and solid vinyl.
- Fire resistant: meets NFPA-701 and CSFM standards for flame retardancy.
- Resistant to all ultraviolet rays and is rot, tear and mildew resistant.

* Wind load tested on a 10-inch x 12-inch solid vinyl roll-up door per ANSI/DASMA 108-2002.

Available Options:

- Vinyl Door color options: gray, black, blue, beige, green, red, yellow, orange and white.
- Mesh Door color options: gray, black, almond, royal blue, spruce green, yellow and red.
- Operations include: manual chain hoist, 18 inches per second (in tube motor), 28 inches per second and 36 inches per second (external mounted motor).
- Various Control Options: hardwired and RF available to meet your specific application.
- Outside face mount or inside projection mount available.







High-speed vinyl roll-up door. Also available: vinyl roll-up doors for extreme conditions.







Side seal.

CALL 800-456-5624 FOR PRICING AND INFORMATION

ITEM NO.	PRODUCT	F.O.B. FACTORY
B399 0037	Bug and Bird Mesh Door	CUTTO
B399 1325	High-Speed Vinyl Roll-Up Door	SIZE

FLEXIBLE DOORS

Flexible Airguard® Doors







Series 100 Doors

Models Numbers 100E and 100CE

- Meets USDA requirements.
- 45-ounce, heavy-duty, abrasion-resistant vinyl coated nylon.
- Large 30 x 14-inch vision panel made from shatterproof polycarbonate.
- Top mounted gravity actuated hinge provides completely automatic operation. Opens instantly upon contact and closes automatically by gravity.
- 48-inch heavy-duty, 1/8-inch thick Kydex® impact plates mounted front and back of each door.
- Available in green only.





Model 100E (photo) Model 100CE

allows the door to open fully

Top Mounted Gravity Hinge allows the door to open fully

and close automatically. Optional

bracket arm adjustment feature

compensates for jambs that are not plumb.

and close automatically. Optional

bracket arm adjustment feature compensates for iambs that are not plumb







UNIFLEX 240 PVC Door

Models Number 240PVC

- Constructed of two layers of 0.12-inch PVC heat welded together to a thickness of 0.24 inches and textured embossed finish.
- 15 x 14-inch clear vinyl window centered in each panel.
- Meets USDA requirements.
- Top mounted gravity actuated hinge provides completely automatic operation. Opens instantly upon contact, then closes automatically by gravity.
- · Colors: navy, royal blue, chocolate brown, medium brown, forest green, red, metallic gray and black.



300 Belted Door

Models Number 300 Belted

- \bullet For heavy use forklift and/or freezer applications down to -30 °F.
- Wiper seals are provided at bottom and top.
- Balloon seals provided at jamb edge of each door.
- Window centered in each panel 15 inches x 14 inches.
- Constructed of two layers of abrasion-resistant, two-ply "belting" material bonded together.
- Top mounted gravity actuated hinge provides completely automatic operation. Opens instantly upon contact, then closes automatically by gravity.
- Available in green only.

Top Mounted Gravity Hinge allows the door to open fully and close automatically. Optional bracket arm adjustment feature compensates for jambs that are not plumb.





973 Standard Forklift Doors

Models Number 973

- NOT for freezer applications.
- Constructed of 0.16-inch thick, PVC door body with a two-ply, vinyl coated nylon bracket pocket.
- Top mounted gravity actuated hinge provides completely automatic operation. Opens instantly upon contact, then closes automatically by gravity.
- Extra-large viewing area allows clear visibility and maximum safety.
- Balloon seals provided at jamb edge of each door, top and bottom wipers.
- Textured vinyl impact plates on both sides increases strength and durability of door.
- Colors: navy, royal blue, chocolate brown, medium brown, forest green, red, metallic gray and black.



$\boldsymbol{\cap}$	D	П	76	Э 1	-		7	D	ıc		ΙО	~		Λ	D	П	W	п			•	D	C
U	π	$\boldsymbol{\nu}$	456	C I	- 6	S/	N	D	LE	A	ΙK	J	u	A	ĸ	v	,	v	U	_	,	ĸ.	3

Please have the following information available.

REMEMBER: Check your local building codes and/or with your local USDA inspector when buying products for your remodeling job.

Exact finished opening size (inches): Width _____ Height ____ Color: ____ Model: □ 100E □ 100CE □ 240 □ 300 □ 973

Traffic: ☐ People ☐ Carts ☐ Other _____ Temperature: Inside ____ ___ Outside ___

CALL 800-456-5624 FOR PRICING AND INFORMATION


Insulated Traffic Doors

- Fully gasketed doors can be mounted on either wood or metal frames (not included).
- Large polycarbonate windows are virtually scratch-resistant.
- Optional bumpers and impact plates 6 inches to 42 inches high, available.
- V-cam hinge; 1-inch diameter steel hinge post and steel leading edge post is molded in the door and runs the full length of panel.
- No gap seams; impervious to moisture, acids, petroleum products, or animal fats.
- XHD Retail Door (all stainless steel hardware) also available.
- Available in 14 colors: navy, royal blue, cadet blue, beige, chocolate brown, medium brown, jade, forest green, red, burgundy, white, cloud gray, metallic gray and black.



F.O.B. FACTORY ITEM

SPECIAL ORDER



Ultra-hiah density, non-CFC urethane foam core.

Medium-Duty Retailer Door

For use with people and cart traffic.

- One-piece molded 1/8-inch thick cross linked polyethylene outer skin over 1/4-inch urethane foam.
- Overall panel thickness: 1-1/2 inches.
- 8-1/2-inch lower hinge guards.
- Sizes up to 96 inches x 96 inches. Larger openings can be accompanied with swinging transom panel.





Durulite double-action V-Cam hinae svstem.

Heavy-Duty Standard Door

For use with people, carts and motorized cart traffic.

- One-piece molded 1/8-inch thick cross linked polyethylene outer skin over 1-3/8-inch urethane foam.
- Overall panel thickness: 1-7/8 inches.
- 11-inch lower hinge guards.
- Sizes up to 96 inches x 96 inches.



R-FACTOR: 10.83

ORDER INSULATED TRAFFIC DOORS

Please have the following information available.

Exact finished opening size (inches):

Width _____ Height _____

☐ Standard 24" High ☐ Other ____

Kickplates: ☐ 24" ☐ Other _____

Model:

☐ Medium-Duty ☐ Heavy-Duty

☐ Ultra Heavy-Duty

Color:

☐ Red ☐ Royal Blue ☐ Beige ☐ Navy

☐ Cadet Blue ☐ Jade ☐ Medium Brown

☐ Chocolate Brown ☐ Metallic Gray ☐ Cloud Gray ☐ Forest Green

☐ Burgundy ☐ White ☐ Black

Ultra Heavy-Duty Industrial Door

For use with people, carts, motorized carts and forklift traffic.

- One-piece molded 1/4-inch thick cross linked polyethylene outer skin over 1-3/8-inch urethane foam.
- Panel thickness: 1-7/8 inches. 11-inch lower hinge guards.
- Sizes up to 120 inches x 120 inches. Larger openings can be accompanied with swinging transoms or double dutch panels.



R-FACTOR: 10.83

CALL 800-456-5624 FOR PRICING AND INFORMATION

ABS 5000 Light-Duty Traffic Door

Aluminum Sheet Door Alternative - Constructed of 1/4-inch thick stress relieved high-density polyethylene, textured to hide normal dents and scratches. For use with cart, pallet jacks and people traffic.

- Includes 14 x 16-inch scratch resistant polycarbonate window set in vacuum formed frames for a clean, low profile and centered 60 inches from the floor.
- Constructed of light-weight durable 1/4-inch ABS plastic and resists dents, gouges and abrasions.
- Hinge system mounts to the jamb with offset cam system and hardened rollers.
- The entire length of the panel is reinforced at the back with 3 layers of 6-inch wide x 3/4-inch thick ABS material, allowing for superior impact resistance and virtually eliminating broken spines.
- Can be custom designed to fit any plant, store or restaurant application.
- Not recommended for forklifts. Not gasketed.
- Doors can be mounted on either wood or metal jambs, frames not included.
- Optional kickplates, jamb guards and locking devices.
- Colors: beige, cloud grey, white, medium brown, red and black.









SRP 5000 Medium-Duty Traffic Door

Constructed of 1/2-inch thick stress relieved high-density polyethylene, textured to hide normal dents and scratches. For use with carts, pallet jacks and people.

- Includes 9 x 14-inch acrylic windows set in rubber molding.
- Can be custom designed to fit any plant, store or restaurant application.
- Doors can be mounted on either wood or metal jambs, frames not included.
- Back edge spine is a one-piece, continuous extruded 1/4 inch x 2-inch diameter anodized aluminum tube with flanges that radius the door panel for added strength and durability.
- Colors: chocolate brown, red, metallic gray, black, beige, white and cloud gray.











F.O.B. FACTORY

Structural Steel Door Frames Available


Manufactured of tubular steel to fit your particular door opening. They are shipped knocked-down in three easy to assemble pieces.




Classic "C" Hinae — can easily be adjusted after removing the cover and screws.



Back Spine — Heavy-duty "U" shaped fiberalass pultrusion further stiffens the spine for added strength and stability.



Classic "E" Hinge — gravity close hinge system mounts to the jamb with offset hardened steel cam and rollers.



ORDER

Heavy-duty bottom hinge pin stabilizes the panel in the frame.

CALL 800-456-5624 FOR PRICING AND INFORMATION

Traffic Doors







SD2000 Light-Weight Aluminum Traffic Doors

For use with cart and people traffic only, no motorized traffic.

- Includes 9 x 14-inch acrylic windows wet in black rubber molding.
- Constructed with 0.063-inch anodized aluminum.
- Hinge system mounts to the jamb with offset cam system and hardened rollers.
- Can be custom designed to fit any plant, store or restaurant application.
- NOT for washdown. Optional kickplates available.
- Doors can be mounted on either wood or metal jambs, frames not included.



Leading Edge is formed in a diamond for vertical panel stiffness and edge protection.



Back Edge Spine -1 inch thick by 5 inches wide back edge spine is reinforced with 3/8-inch plywood and capped



SST2000 Stainless Steel Traffic Doors

Custom made for any size opening! For use with cart and people traffic only, no motorized traffic.

- Available in single or double door styles.
- Constructed of 16 gauge, #4 brushed finish stainless steel.
- Includes 9 x 14-inch acrylic window set in rubber molding.
- Ultra Soft Touch™ assisted gravity hinge is hidden in the back spine.
- Low-maintenance, no unattractive upper panel cutouts or large corner hinge components visible.
- For added strength and durability, the entire length of the back panel is reinforced with one continuous piece of extruded aluminum that has flanges which wrap the door panel.
- Optional impact plates available.



CALL 800-456-5624 FOR PRICING AND INFORMATION

ORDER SERVICE DOORS Please have the following information available. Exact finished opening size (inches): Width _____ Height _ Kick plate height: _____ Traffic: ☐ People ☐ Carts ☐ Other

FREE SHIPPING* FREE GROUND SHIPPING

when you place an order for \$400 or more from THIS BUYERS GUIDE!

*FREE SHIPPING does NOT include UPS Next Day Air, UPS 2nd Day or UPS 3rd Day Select. Certain items may not qualify. This offer is good only on orders shipped UPS Ground in the 48 contiguous states. Based on dimensional weight, we will determine the most efficient means of shipment, either UPS or LTL. Products may ship by truckline. PRICES ARE SUBJECT TO CHANGE • MINIMUMS MAY APPLY • VISIT OUR WEBSITE FOR CURRENT PRICING.

CHEMAPRUF

Chem-Pruf Fiberglass Doors

Manufactured to withstand the most corrosive environments from saltwater, chemicals, detergents, chlorine, acid, to humidity and more.

- Superior 25 mil molded gel coat door finish is equal to 50 60 coats of paint.
- 0.125 inch thick and weighing 1.0 pound/square foot, Chem-Pruf door plates are by far the strongest in the industry.
- The interior cavity of the FRP door is completely filled with a corrosionresistant material.
- Proprietary bonding resin system to fuse the plates to the collar and core. There will be no separation or delamination.
- Available options: polyurethane foam or mineral cores, various window options, fiber reinforced accessories and high quality stainless steel hardware.

Every Chem-Pruf Fiberglass Door is CUSTOM MANUFACTURED to Your Exact Requirements.




CALL 800-456-5624 FOR PRICING AND INFORMATION







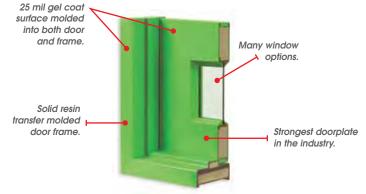





Single Door Sizes: Rough Opening Fit

34" x 82" 38" x 82" Double Door Sizes: Rough Opening Fit 67" x 82"

75" x 82" 57" x 86" 75" x 86"

NOTE: Size includes framing, actual door will be 2 inches (height and width) smaller.

PVC Interior Doors








- Choose from insulated or non-insulated.
- Available in white only.
- For interior use only light-weight, corrosion and mildew resistant.
- Internal steel reinforced sides.
- Double track felt sweeps on top, rubber sweeps on bottom.
- Available options: windows, kickplates, door closer, locking devices and insulation.

ORDER PVC INTERIOR DOORS Please have the following information available. ☐ Single Door ☐ Double Door Door size: Width _____ Height _ □ Insulated □ Non-Insulated Swing: □ LH □ RH □ In/Out Wall Thickness: _ Wall Type: __ **Options:** □ Windows □ Kickplates □ Door Closer □ Locking Devices Required Hardware:

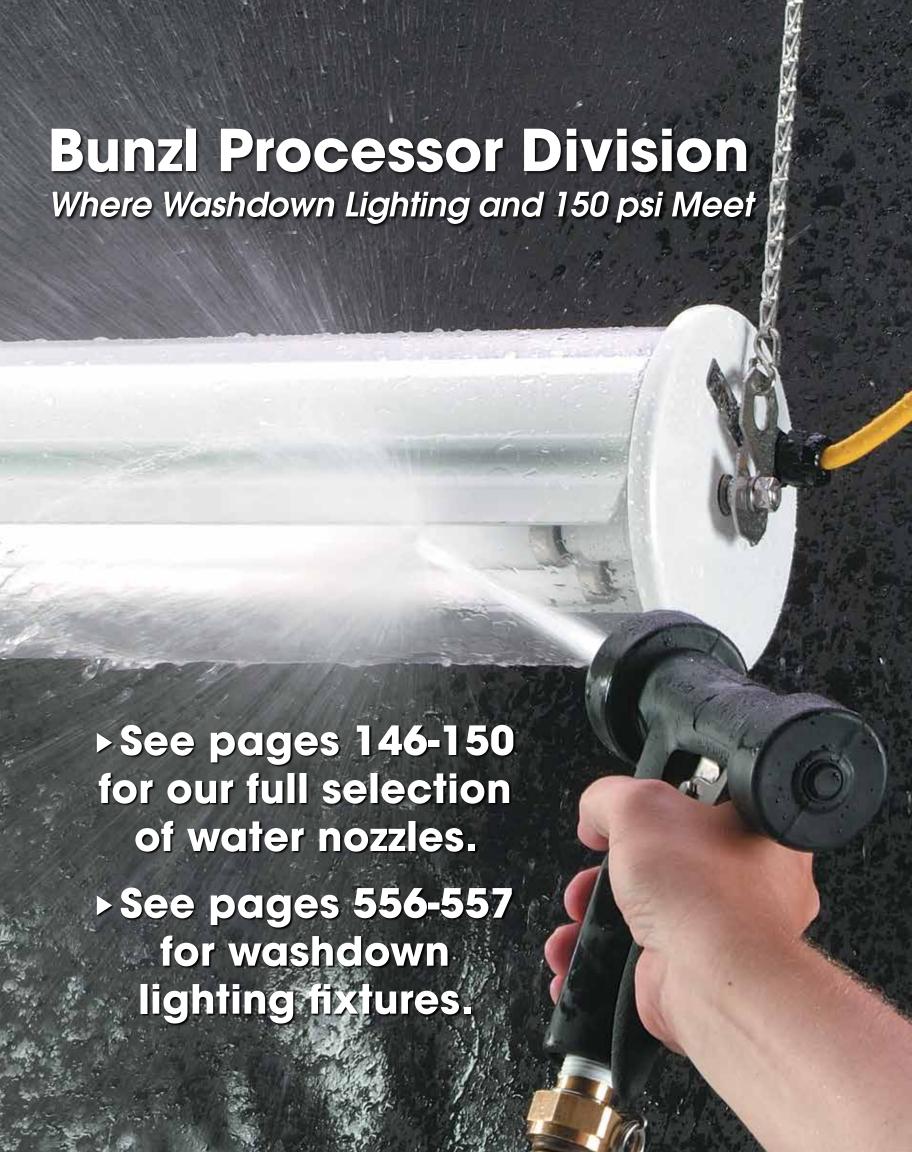

COLD STORAGE DOORS

Cooler and Freezer Cold Storage Doors

Custom designed doors to meet your individual needs.



Features:

- No wood in door.
- FRP frame.
- Chrome cam lift hinges.
- Heavy-duty chrome handle.
- Heated gasket prevents door from freezing closed.

Options:

- Inside casing and return jambs.
- Locking devices.
- Meat rail provision.
- Panic bar latching hardware.
- Door closer (manual or electric).
- Optional window.
- Kick plates (stainless or aluminum).








CALL 800-456-5624 **FOR PRICING** AND INFORMATION



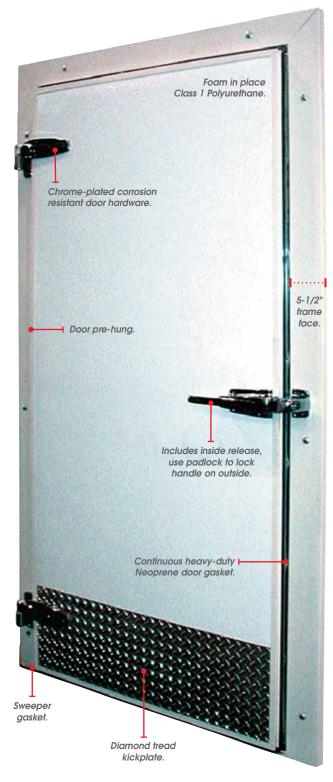


ORDER COOLER AND FREEZER STORAGE DOORS Please have the following information available. Exact finished opening size (inches): Width _____ Height ____ Single Door Double Door Swing: LH RH Finish: ☐ White USDA Embossed Galvanized Steel ☐ Stainless Steel Door Closer: ___ _____ Window: _____ Frame: Standard (front face casing only) L-Shaped (front face casing, jamb) L-Shaped (front face casing, jamb, inside casing) Wall type: ______ Wall thickness: _____ Temperature: Inside _____ Outside _____ Sill: ☐ Flush ☐ High Diamond tread kickplate size (inches): Length _____ Height ____ Meat rail cut-out: ☐ Yes ☐ No

PRICES ARE SUBJECT TO CHANGE • MINIMUMS MAY APPLY • VISIT OUR WEBSITE FOR CURRENT PRICING

Polished Chrome Reversible Cam-Rise Door Hinge

• Reversible, constructed of die-cast zinc with chrome finish.






ITEM NO. PRODUCT



Pop out cap. Turn strap 180°, reinsert pin in strap.



Reposition strap into flange and replace cap.

EACH \$71.95 138.95

3687 29281	1-3/8" Offset
3687 0029	Flush Mount (Pair)

Bolt-Action Walk-In Cooler Door Latch

- Cast iron body and strike, malleable iron handle and zinc-plated.
- Inside safety release handle included.



ITEM NO.	PRODUCT	EACH
3687 2165	3/4" x 1-3/8" Offset	\$243.95
3687 9404	Flush Mount	252.95

Heavy-Duty Door Closer

- Malleable iron with steel rod and tube with adjustable spring.
- Use with doors greater than 200 pounds.
- Zinc plated.

ITEM NO. PRODUCT



SureClose™ Hydraulic Door Closer

Gas-loaded hydraulic cylinder guarantees controlled closure.

- Patented solid steel enclosed housing assures long wear.
- Extra-wide, bend-resistant hook ensures roller pick-up and overcomes alignment problems.
- Reliable operation even after half-million closures.
- Hook sold separately (order below).

NOTE: Hook sold separately. ORDER BELOW.

ITEM NO.	PRODUCT	EACH
3687 0005	Closer w/o Hook	\$128.95
	Offset Hook	
3687 1003	Flush Hook	14.45



Cold Storage Door Latch



ITEM NO.	PRODUCT	EACH
3687 36961	1-1/2" Chrome Finish	\$253.95
3687 17431	1-5/8" Stainless Steel	340.95
3687 0500	Chrome Finish Flush-Mount	266.95
3687 5022	SS Flush Mount	353.95

(Includes inside release handle.)

Push Inside Release



Heavy-Duty Cold Storage Door Latch



- Die-cast zinc body and strike housing.
- Inside push-release paddle included.



ITEM NO.	PRODUCT	EACH
3687 2951	3/4" x 1-1/8" Offset	\$319.95

Heavy-Duty Reversible Cam-Rise **Door Hinge**



• Choose from high-pressure die-cast zinc, zinc-plated or stainless steel.

NOTE: Sold by the pair.



ITEM NO.	PRODUCT	PAIR
3687 29591	23-1/8" Zinc Plated, 1-1/4" Offset	\$168.95
3687 20101	13-11/16" Stainless, 1-1/4" Offset	597.95
3687 10141	23-1/8" Zinc Plated, 1-1/2" Offset	247.95
3687 00041	23" Flush Mounted Zinc Plated	154.95

ORDER REPLACEMENT HARDWARE Please have the following information available.

Many Offsets Available from Flush to 1-1/2"

Size of Replacement Part Needed: _



Shat-R-Shield[®] Incoplas™ LED Hybrid

Functional as an area light, flood light or wall pack. Tailored to your custom specification.

- · Available in three mounting options, adjustable, surface or wall. One person installation with built-in self-leveling kit.
- Choose from 45 or 90 Watts. Lumen Output: Up to 5,000 (45 W); Up to 10,000 (90 W) Voltage: 120-277 V
- Operating Temperature: -22 °F to 113 °F (-30°C to 45°C) Up to 122 °F (50 °C) in 5,000 lumen package.
- Dimming: 0-10 V Weight: 7-1/2 pounds. Dimensions: 13 inches L x 10-1/4 inches W x 5-3/5 inches H.



► 10 PER CASE.

EACH
... \$499.95

*NSF rating does not apply to this mount.











Shat-R-Shield® Fluorescent Lights

3208 00091 45 Watt Fixture with Mount

3208 00101 90 Watt Fixture with Mount

- If accidentally broken, virtually all glass, mercury and phosphors are safely contained within the skin tight coating.
- Shat-R-Shield® lamps are UL & NSF Certified, USDA approved and meet FDA and OSHA standards.
- Base: Miniature bi-pin (G5)

ITEM NO. PRODUCT

• Length: 46 inches.

•	24	BU	IBS	PFR	CASE
	24	БО	LDJ	FLK	CASE

ITEM NO.	PRODUCT	WATTAGE	CASE
3208 0008	T5, 46"	4100 K (82 Watt)	\$459.95
3208 0007	T5, 46"	5000 K (100 Watt)	459.95

NEED ASSISTANCE?

Our experienced customer service representatives are available to answer your questions, find the products you are looking for, check product availability, as well as take your order.

800-456-5624



▶ 10 PER CASE

Coated Shatterproof Insect Lamp Bulbs

• 2x contact.



➤ SEE PAGE 583
For Insect Light Traps

 F.O.B. FACTORY

 ITEM NO.
 PRODUCT
 WATTAGE
 EACH

 E756 00135
 T8, 18".
 15 Watt
 \$16.95

 E756 00081
 T8, 18".
 15 Watt
 13.95

 E756 00281
 T8, 24".
 20 Watt
 19.95

 E756 00091
 T12, 24".
 20 Watt
 17.95

 E756 00031
 T12, 48".
 40 Watt
 22.95

Shat-R-Shield® Waterproof LED Lamps

IP68 Waterproof, Safety-Coated LED lamps have a thin layer of silicone coating that completely seals the lamp to protect fragile electronic components against moisture, corrosion and premature failure. Ideal for any application exposed to harsh environments.



 Shatter-resistant, safety-coated lamps will contain all particles if the lamp is accidentally broken. The coating does not affect light output. <1% lumen loss.

ITEM NO.	PRODUCT	EACH
3208 00051	A. 75 Watt Equivalent	\$20.95
	•	12 PER CASE
ITEM NO.	PRODUCT	EACH
3208 00041	B. 65 Watt Equivalent	\$26.45

PRICES ARE SUBJECT TO CHANGE • MINIMUMS MAY APPLY • VISIT OUR WEBSITE FOR CURRENT PRICING

FLB Standard Service Light Fixtures

- Rugged UV stabilized non-metallic housing and one piece molded, impact resistant acrylic lens.
- Universal voltage electronic ballast. Energy saving lamp and ballast configuration.
- State-of-the-Art universal voltage electronic ballast.
- High-pressure tested to 1500 psi.
- Toolless entry for easy installation and maintenance.
- 12 stainless steel captive latches for positive lens fit against a poured-in-place closed cell polyurethane gasket.
- NSF Certified for splash zone, NEMA 4x certified and IP 67 certified.
- Completely assembled ready to install out-of-the-box.

			F.	O.B. FACTORY
ITEM NO.	PRODUCT	BULB TYPE	WATTAGE	EACH
3436 0434	4' FLB	4-Lamp, T5	54 Watt	\$289.95
			54 Watt	



FLB-RS (Rough Service) Light Fixtures

- Rugged UV stabilized non-metallic housing and one-piece molded, impact resistant acrylic lens.
- Proven lampholder bridge system with plunger and stationary lampholder set.
- State-of-the-Art universal voltage electronic ballast.
- Toolless entry for easy installation and maintenance.
- 12 stainless steel captive latches for positive lens fit against a poured-in-place closed cell polyurethane gasket.
- Reinforced stainless steel mounts for numerous mounting options.
- Completely assembled ready to install out-of-the-box.
- High-pressure tested to 1500 psi.
- NSF Certified for splash zone, NEMA 4x certified and IP 67 certified.
- 6-feet factory installed lead. Instant restrike.




			Г.	.U.D. FACTURT
ITEM NO.	PRODUCT	BULB TYPE	WATTAGE	EACH
3436 0438	4' FLB-RS	4-Lamp, T5	54 Watt	\$379.95
3436 0439	4' FLB-RS	6-Lamp, T5	54 Watt	456.95



Vapor Guard Wet Light Fixtures

- One-piece closed cell polyurethane gasket is molded into the edge of the housing.
- Conduit entries have a sealed plastic closure plug.
- For use in environments down to -20 °F.
- Fiberglass housing allows light to be mounted in corrosive and wet locations.
- Toolless entry for easy bulb replacement.
- UV stabilized lens.
- NSF certified and ETL listed.





Optional Stainless Steel Latches and Standard Mounting Bracket.

NOTE: NSF and UL listed.

➤ SEE PAGE 554 For Bulbs, Sold Separately

T5 Vapor Guard Lights Universal Voltage F.O.B. FACTORY ITEM NO. PRODUCT EACH 3436 2545 4', 2-Lamp, 54 Watt, High Output \$187.95 3436 8634 4', 3-Lamp, 54 Watt, High Output 179.95 3436 8635 8', 2-Lamp, 54 Watt, High Output 311.95 3436 8636 8', 6-Lamp, 54 Watt, High Output 359.95


Vapor Guard Replacement Parts


For use with Vapor Guard fixtures only. Will NOT work with other brands.

ITEM NO.	PRODUCT	EACH
3436 20041	4' Replacement Cover, Ribbed Lens	\$29.95
3436 10081	8' Replacement Cover, Ribbed Lens	53.95
3436 22011	Replacement SS Mounting Brackets	12.95
3436 10041	Optional SS Latch Kit for 4' Fixture	35.95
3436 10071	Optional SS Latch Kit for 8' Fixture	60.95
3436 04601	4' Clear Lens	35.95
3436 04611	8' Clear Lens	53.95

WASHDOWN LIGHT FIXTURES







Seal Lite High-Pressure Washdown Lighting Fixtures



Totally sealed design for high-pressure washdown areas.

- All exposed areas are made from non-corrosive materials.
- Chemical- and crack-resistant acrylic lens. Universal voltage. UL listed.
- Aluminum interior materials for safety and long life.
- 6-foot pigtail cable is included as well as two 1-foot stainless steel hanging chains.

T5 High Output

Mini Bi-pin, Universal Voltage

ITEM NO.	LENGTH	BULBS REQUIRED	WATTAGE	EACH
3436 4254	4'	. 2x, T5 - 48" Bulbs	54 Watt	\$348.95
3436 4354	4'	. 3x, T5 - 48" Bulbs	54 Watt	329.95
3436 8455	8'	. 4x, T5 - 48" Bulbs	54 Watt	472.95
3436 8654	8'	. 6x, T5 - 48" Bulbs	54 Watt	562.95




Standard unit with white end caps. Unit shown with T5 bulbs.

Totally sealed design for high-pressure washdown areas.

stainless steel end caps. Unit shown with T8 bulbs.

Optional Emergency Battery Backup Light available. Call for more details.

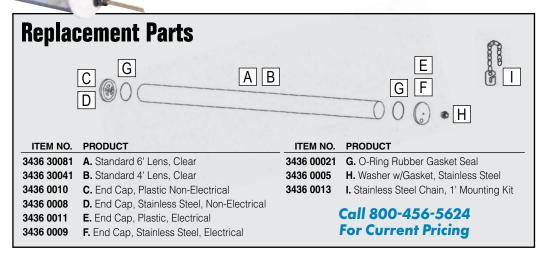

Washdown LED Lighting

- Dust tight and waterproof rated.
- Polycarbonate, shatterproof lens.
- Up to 70% energy savings compared to standard fixtures.
- Ceiling mounted fixtures.















Poseidon Linear LED Lighting

		AMBIENT TEMP		
ITEM NO.	PRODUCT	RANGE	WATTAGE	EACH
J680 00081	Nautilus High Bay Light	-40° to 149 °F	150 Watt	\$995.00
J680 00091	Poseidon 24" Linear Light	-40° to 122 °F	66 Watt	524.95
J680 00101	Poseidon 48" Linear Light	-40° to 122 °F	136 Watt	899.00

Call 800-456-5624 For More Information

LED WDL, Washdown Light


- WDL is an energy efficient linear LED fixture designed specifically for heavy wash-down applications.
- IP69K rated enclosure utilizes a 0.125-inch thick chemical and impact resistant frosted lens which provides a glare-free wide distribution light pattern similar to fluorescent products.
- UL 1598 for wet locations and battery back-up.
- ANSI/NSF 2 certified for splash zones.
- CSA Std C22.2 No.250.0




		F.O.	B. FACTORY
ITEM NO.	PRODUCT	SIZE	EACH
3436 2122	LED WDL	4 ft	\$649.00
3436 2123	LED WDL	8 ft	1,073.95

LED PIPE LITE Series

• PIPE LITE provides a cost effective, precise, uniform, glare-free, LED task lighting solution for the food processing industry.





• ANSI/NSF 2 certified for splash zones.

• CSA Std C22.2 No.250.0



KAS

MADE IN

USA

HEWING.	PRODUCT	SIZE	EACH
3436 01701	LED Pipe Task Light	. 2 ft	\$499.00
	LED Pipe Task Light		
3436 82501	LED Pipe Task Light	. 8 ft	999.00

LED NML-RS

- Non-Metallic LED Rough Service is a low-bay solution to reduce energy usage without sacrificing lumen output.
- Frosted lens to provide a glare-free work environment.
- Completely assembled and ready to install.
- UL 1598 for wet locations.
- IP65, IP66, IP67 rated.
- Gray with clear lens.



	F.O.	B. FACTORY
ITEM NO.	PRODUCT	EACH
3436 0015	LED NML-RS	\$1,205.05

LED Light Fixture

- Designed for damp/wet/cooler/freezer environments.
- Low profile high-impact Lexan anti-glare globe.
- \bullet Operational for -40 °F (-40 °C) to 104 °F (40 °C).
- Designed to reduce electrical usage by 85%.
- Rated for 50,0000+ hours of life.
- Minimal heat generation.
- Surface mount design.
- LM-79 tested.



F.O.B. FACTORY **DIMENSIONS** ITEM NO. PRODUCT **3687 80801** 1808 LED Fixture 5-1/2" x 3-1/5"

NEED ASSISTANCE? 800-456-5624

Our experienced customer service representatives are available to answer your questions, find the products you are looking for, check product availability, as well as take your order.



PRICES ARE SUBJECT TO CHANGE MINIMUMS MAY APPLY
 VISIT OUR WEBSITE FOR CURRENT PRICING

LED Emergency Exit Signs For Wet Locations

- 90 minute emergency exit lighting. Long life nickel cadmium batteries.
- Test switch and test light. Exit signs have extended life LED lamps.
- State-of-the-art water tight ventilation system for wet locations.
- Meets or surpasses safety codes for emergency lighting.
- Exit sign illuminates continuously in AC and power failure modes (egress model downlight illuminates in power failure mode).
- Non-corrosive enclosures and external hardware.
- Completely assembled ready to install out-of-the-box.









F.O.B. FACTORY

MADE IN

Emergency Exit Light

with Egress Downlight

ITEM NO.	PRODUCT	EACH
3436 04401	120V	\$549.95
3436 04411	277V	549.95

Emergency Exit Light

No Downlight

ITEM NO.	PRODUCT	EACH
3436 04421	120V	\$449.95
3436 04431	277\/	449.95

AC Only Powered Exit Signs

- Energy efficient LED lamps.
- Non-corrosive enclosures and external hardware.
- Meets or surpasses safety codes for emergency lighting.
- Completely assembled ready to install out-of-the-box.



earess downliaht

ITEM NO.	PRODUCT	EACH
3436 04441	120V	\$489.95
3436 04451	277V	489.95


EWP-LED Emergency Hose-Down Wall Pack Light Fixture

Compact emergency fixture specifically engineered for applications requiring protection in severe corrosion, heavy hose-down and wet environments.

- Long-life PL lamp with maximum illumination reflector.
- UL listed 924 Emergency.
- NEMA 4x polycarbonate enclosure.
- Stainless steel hardware on exposed areas.
- 3-foot cord conduit lead. Push button test switch.
- Sealed maintenance free battery.
- Two mounting options: Surface mount or aluminum angle mount.

The state of the s	
The state of the s	
有深刻流形的现在分词	
CATALOG CONTRACTOR OF A MARKET CONTRACTOR OF	
	N
THE RESERVE OF THE PARTY OF THE	
3 THE STATE OF THE	
Walter All	
EDIT WITH TS	








F.O.B. FACTORY







- Fiberglass reinforced plastic grid doesn't conduct heat like metal grids. FRP Rating: Class A.
- Unaffected by moisture and humidity. Rust and corrosion proof. Light-weight yet rigid.

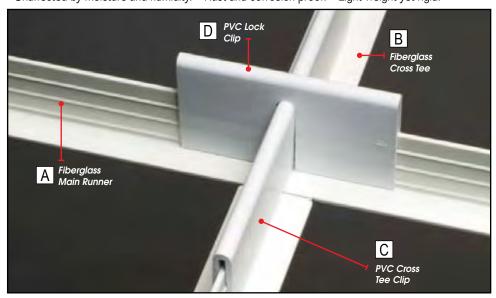

	F.O.B	. FACTORY
ITEM NO.	PRODUCT	EACH
3110 80351	A. 12' Fiberglass Main Runner	\$45.25
3110 0478	B. 2' Fiberglass Cross Tee	8.75
3110 8036	4' Fiberglass Cross Tee	16.45
3110 8038	C. 8" PVC Cross Tee Clip	3.25
3110 8039	D. 4" PVC Lock Clip	2.15
3110 8037	6" PVC Splice Clip	2.15
3110 8040	Hold Down Clip for 0.090" and 0.004" Panels.	0.65
3110 0479	Hold Down Clip for 1" Foam Panel	1.05
3110 3939	Hold Down Clip for 2" Foam Panel	4.45
3110 8041	8' x 1-1/2" x 1-2/5" Fiberglass Angle	31.05
3110 8043	12' x 12-Gauge Galvanized Wire	2.95
3110 7220	12' x 12-Gauge Stainless Wire	12.95
3110 8044	0.12" x 1-1/2" Aluminum Pop Rivets (500)	70.95
3110 5273	Wall Clips	3.25

EASY TO INSTALL



1. Easy to install with positive 'cross tee" grid lock brackets.



2. No special tools required. Use simple hand tools.



Stainless Steel

Grid System Perfect for suspension

lighting systems. • Supports 25 pounds.

ITEM NO. PRODUCT

EACH

\$14.95

25 lb Hanger

3110 0001

3. Ceiling panels resist moisture, match wall coverings and are easily removed for repair of service utilities.

Suspended Ceiling Panels

FRP Panels (Fiberglass Reinforced Plastic)









0.09-inch FiberLite Liner Ceiling, 2-feet x 4-feet Textured FRP panel with no substrate backer.



0.12-inch FiberLite Liner Ceiling, 2-feet x 4-feet Textured FRP panel with no substrate backer. Use in high heat greas.




1-inch EPS Foam is laminated to 1/2-inch fire and moisture-resistant gypsum and FiberLite FRP one side only. 2 feet x 4 feet.



1½-inch EPS Foam is laminated to 1/2-inch fire and moisture-resistant gypsum and FiberLite FRP one side only. 2 feet x 4 feet.




2-inch EPS Foam is laminated to 1/2-inch fire and moisture-resistant gypsum and FiberLite FRP one side only. 2 feet x 4 feet.



0.4-inch FiberCorr Liner Ceiling, 2-feet x 4-feet textured FRP panel with no substrate backer.

PVC Panels



▶ PURCHASE IN MULTIPLES OF 4

ITEM NO. PRODUCT

E090 40041 PVC Ceiling Panel, 2' x 4' x 1/2"

F.O.B. FACTORY **EACH** \$34.95

▶ PURCHASE IN MULTIPLES OF 4.

F.O.B. FACTORY ITEM NO. PRODUCT **EACH** 3149 0912 A. FiberLite Liner Ceiling Panel 0.090", 2' x 4' Texture FRP Panel - No Substrate Backer \$18.95 3149 1204 **B.** FiberLite Liner Ceiling Panel 0.120", 2' x 4' Texture FRP Panel - No Substrate Backer 30.75 44.95 3149 5100 C. FiberLite Insulated Ceiling Panel, 1" EPS Foam, 2' x 4' FRP 3149 0151 **D.** FiberLite Insulated Ceiling Panel, 1-1/2" EPS Foam, 2' x 4' FRP 49.95 3149 5200 54.95 3149 4004

CEILING AND WALL COVERING AND ACCESSORIES

NOTE: Not for use in freezer applications.

Tongue and Groove 1/2-Inch PVC Ceiling and Wall Covering

Stain-resistant, low-maintenance, waterproof panels are also easy to clean and ideal for high moisture areas. Materials are totally recyclable. Never needs painting and will not rot or rust.

- Panels are 100% recyclable and do not support mold or mildew per ASTM D3273 and D3274.
 - Panels meet ASTM E-84-05 and CAN/ULC S102.2-3 Class A fire rating.
 - Can easily be cut using fine tooth blade, table saw or utility knife.
 - Custom cut lengths up to 20 feet long. No exposed fasteners.
 - Panels are extruded from exterior-grade PVC.
 - Easy to install using the tongue and groove system.
 - Cleans with pressure washers or soap and water.
 - Can be attached directly to walls and ceilings.
 - Limited 10 year warranty.

Call 800-456-5624 for Custom Room and Ceiling quotes.

Panels slide together with tongue and groove design leaving no exposed fasteners to rust or promote mold or bacteria growth. Use stainless steel screws to connect nailing fin to wall or stud.





ORDER PVC CEILING AND WALL COVERING

Please have the following information available.

SPECIAL ORDER

F.O.B. FACTORY

Covering: ☐ Full Room (walls and ceiling) ☐ Walls Only ☐ Ceiling Only

Room dimensions: Length _____ Width ____ Height ____

Panel directions (ceilings only): ☐ Perpendicular to trusses ☐ Parallel to trusses



Multi-Purpose Adhesives




EAR EACTORY

- Specially formulated for bonding fiberglass reinforced plastic to various substrates.
- Fast setting and resistant to temperature changes.



ITEM NO.	PRODUCT	EACH
3149 1359	11 oz. Tube	\$7.25
3149 0006	4 Gallon Pail, Latex-Based	83.95





Stainless Steel Corners

Protect interior corners from damage.

- Custom widths and lengths available.
- Six pre-drilled holes.

		F.O.B	. FACTORY
ITEM NO.	PRODUCT	DIMENSIONS	EACH
2510 22361	Outside	. 2" x 2" x 36"	\$51.15
2510 22481	Outside	. 2" x 2" x 48"	54.45
2510 22601	Outside	. 2" x 2" x 60"	63.15
2510 22721	Outside	. 2" x 2" x 72"	68.25
2510 22371	Inside	. 2" x 2" x 72"	51.15
2510 22491	Inside	. 2" x 2" x 48"	54.45
2510 22611	Inside	. 2" x 2" x 60"	63.15
2510 22731	Inside	. 2" x 2" x 36"	98.55


MADE IN

PRICES ARE SUBJECT TO CHANGE • MINIMUMS MAY APPLY • VISIT OUR WEBSITE FOR CURRENT PRICING.

Fiberglass Wall Coverings

• Meets USDA requirements. • Meets Class C/3 Fire Rating per ASTME 84.





0.09-Inch Textured Wall Liner Panels

4' x 50' x 0.090" Liner Panel . . .

Orders Under 20 Panels Require a Crate Fee Orders Under 12 Panels Require a Crate Fee

F.O.	F.O.B. FACTORY	
PRODUCT	EACH	
4' x 8' x 0.090" Liner Panel	CALL	
4' x 10' x 0.090" Liner Panel	FOR	
4' x 12' x 0.090" Liner Panel	PRICING	

0.4-Inch FiberCorr Wall Panel

	F.O.	B. FACTORY
ITEM NO.	PRODUCT	EACH
3149 4463	4' x 8' FiberCorr Panel	CALL
3149 4464	4' x 10' FiberCorr Panel	FOR
3149 4012	4' x 12' FiberCorr Panel	PRICING

0.375-Inch Laminated Wall Panel

ORDER

Orders Under 16 Panels Require a Crate Fee

	F.U.	D. FACTORY
ITEM NO.	PRODUCT	EACH
3149 4469	4' x 8' Exterior Plywood	CALL
3149 4470	4' x 10' Exterior Plywood	FOR
3149 7512	4' x 12' Exterior Plywood	PRICING

White Nylon Rivets

ITEM NO. PRODUCT

3149 1313

3149 1314


3149 4451 3149 1429

- Non-corroding, white nylon rivets will fasten panels to wood, metal, drywall and concrete.
- Rivets will expand into either solid substrates behind sheet material or metal studs.



NOTE: Recommended 1 per square foot.

	•	100 PER BAG.
ITEM NO.	SIZE	BAG
3149 12801	3/4"	\$15.95
3149 12811	1"	17.95
3149 12821	1-1/2"	42.95



Stainless Steel Fastener

- Provides an expansion relief allowing thermal expansion of paneling products after fastening.
- One-step fastening for FRP panels eliminates pre-drilling larger expansion holes.
- Rustproof, reusable fasteners use Phillips or square drive bits.

NOTE: Recommended 1 per square foot.



	•	100 PER BAG.	
ITEM NO.	SIZE	BAG	
3149 12001	1-1/4" Stainless Fastener	\$64.95	

Vinyl Moldings For Wall Panel Installation

21.35

Molding for 0.09-Inch Panels

F.O.B. FACTORY PRODUCT ITEM NO. EACH 3149 1290 \$3.75 3149 1291 4.95 4.95 3149 0038 3149 1292 3.75 10' Division Bar 4.95 3149 1293 3149 3106 12' Division Bar 6.25 3.75 3149 1294 8' Inside Corner and Cove 4.95 3149 1295 10' Inside Corner and Cove 6.25 3149 0552 12' Inside Corner and Cove 8' Outside Corner and Cove 2.95 3149 1296 3149 1297 10' Outside Corner and Cove . . . 4.95 3149 0099 12' Outside Corner and Cove . . . 6.25 8.75 3149 1459 8' Inside Corner Angle. 10' Inside Corner Angle. 3149 1460 11.25 3149 0014 12' Inside Corner Angle. 11.25 10.05 3149 1308 8' Outside Corner Angle 3149 1309 10' Outside Corner Angle 11.25 3149 9001 12' Outside Corner Angle 11.25 12.55 3149 1279 8' Base Cove 3"..... 10' Base Cove 3"..... 21.35 3149 1277

12' Base Cove 3".....

Molding for 0.4-Inch FiberCorr Panels

	F.O.B	. FACTORY
ITEM NO.	PRODUCT	EACH
3149 0042	8' Cap	\$6.25
3149 0029	10' Cap	7.55
3149 9000	12' Cap	7.55
3149 1108	8' Division Bar	3.65
3149 1104	10' Division Bar	3.75
3149 0063	12' Division Bar	9.95
3149 1302	8' Inside Corner and Cove	7.55
3149 1303	10' Inside Corner and Cove	8.75
3149 0122	12' Inside Corner and Cove	11.25
3149 1304	8' Outside Corner and Cove	7.55
3149 1305	10' Outside Corner and Cove	8.75
3149 0124	12' Outside Corner and Cove	11.25
3149 0016	8' Inside Corner Angle	16.35
3149 0017	10' Inside Corner Angle	20.15
3149 0024	12' Inside Corner Angle	23.75
3149 0018	8' Outside Corner Angle	16.35
3149 0019	10' Outside Corner Angle	18.85
3149 0028	12' Outside Corner Angle	22.65
3149 1279	8' Base Cove 3"	12.55
3149 1277	10' Base Cove 3"	21.35
3149 1306	12' Base Cove 3"	21.35

Molding for 0.375-Inch Panels

	F.U.D	. FACTORY
ITEM NO.	PRODUCT	EACH
3149 1298	8' Cap	\$6.25
3149 1299	10' Cap	6.25
3149 1020	12' Cap	7.55
149 1300	8' Division Bar	7.55
3149 1301	10' Division Bar	8.75
149 0098	12' Division Bar	11.25
149 1302	8' Inside Corner and Cove	7.55
149 1303	10' Inside Corner and Cove	8.75
3149 0122	12' Inside Corner and Cove	11.25
149 1304	8' Outside Corner and Cove	7.55
149 1305	10' Outside Corner and Cove	8.75
149 0124	12' Outside Corner and Cove	11.25
149 0016	8' Inside Corner Angle	16.35
3149 0017	10' Inside Corner Angle	20.15
3149 0024	12' Inside Corner Angle	23.75
3149 0018	8' Outside Corner Angle	16.35
3149 0019	10' Outside Corner Angle	18.85
3149 0028	12' Outside Corner Angle	22.65
3149 1279	8' Base Cove 3"	12.55
3149 1277	10' Base Cove 3"	21.35
3149 1306	12' Base Cove 3"	21.35

3149 1306

LOOR COATINGS

Dura-Seal 400 Industrial Light-Duty Concrete Floor Coatings

Very hard, very chemically resistant. Good in a water environment once hardened. Has odor during applications, but not after curing (6 hours).

- One, 2-gallon container applies two coats over 325-350 sq. ft.
- By mixing 50/50, coating penetrates pores and forms a solid surface plate recognized by the USDA as a contaminant barrier.
- Apply by roller, brush or spray leaves an easy-to-clean, hard, glossy surface suitable for incidental food contact.
- Mix with optional Satin Texture for non-skid durability.
- Meets all USDA and EPA standards.
- Quick-drying coating hardens to a 6-8 mil thickness.

DURA-SEAL 400 COLORS						
FLAT BLACK	CHARCOAL	GRAY	LIGHT GRAY	FLAT GRAY	ALUMINUM	FAUN
WHITE	BLUE WHITE	OSHA YELLOW	CREAM	BUFF	TAUPE	BLUE
TILE RED	DEEP RED	BROWN	COCO BROWN	TERRA- COTTA	TURQUOISE	LIGHT BLUE
DARK Green	BLUE GREEN	MEDIUM GREEN	LIGHT GREEN	CLEAR		

ITEM NO.	COLOR
A468 00151	80 Dura-Seal Aluminum
A468 00131	99 Dura-Seal Clear
A468 00091	100 Dura-Seal White
A468 00121	108 Dura-Seal Flat Gray
A468 00171	109 Dura-Seal House Gray
A468 00111	110 Dura-Seal Light Gray
A468 00071	112 Dura-Seal Gray Floor
A468 00101	114 Dura-Seal Charcoal
A468 00301	118 Dura-Seal Faun
A468 00081	160 Dura-Seal OSHA Yellow
A468 00291	168 Dura-Seal Cream
A468 00141	190 Dura-Seal Terra Cotta
A468 00161	192 Dura-Seal Tan
A468 00271	195 Dura-Seal Taupe
A468 00231	198 Dura-Seal Coco Brown
A468 00241	200 Dura-Seal Brown
A468 00251	204 Dura-Seal Deep Red
A468 00281	225 Dura-Seal Buff
A468 00051	270 Dura-Seal Tile Red
A468 00211	308 Dura-Seal Light Blue
A468 00221	309 Dura-Seal Turquoise
A468 00261	310 Dura-Seal Blue
A468 00181	350 Dura-Seal Light Green
A468 00191	355 Dura-Seal Medium Green
A468 00201	358 Dura-Seal Blue Green
A468 00061	60 Dura-Seal Dark Green











Both Dura-Seal and Dura-Poxy coatings produce a high polish surface.



Optional Satin Texture Surface.

NOTE: Must purchase floor prep/ cleaning products shown below to validate manufacturer warranty.


A+00 00001	00 Dula-Seal Dalk Gleen	
	F.O.E	. FACTORY
ITEM NO.	PRODUCT	EACH
SEE ABOVE	Dura-Seal 400 (above), 2 Gallons (Specify color and surface)	\$258.95

Dura-Poxy Industrial Heavy-Duty Concrete Floor Coatings

A heavier-bodied "100% solids" catalyzed epoxy laminate. Very hard and highly chemically resistant. No odor. Hardens even in a water environment. Accepted by the USDA for Incidental food contact use. For use on floors with major irregularities.

- 8-hour curing time. 1 gallon covers 125 square feet. at 8-10 mil.
- For use on floors with major irregularities in the surface and floors that require maximum resistance to damage from falling tools, forklifts and similar causes
- Quick drying coating hardens to a 20 mil thickness with 2 coats.
- Mix with quartz chips for high skid areas (such as wet or frosty environments) and to form a coating that is resistant to the passing of steel wheels or other heavy machinery.

NOTE: Require temperatures of at least 55 °F during application.





Optional Quartz Granular Surface

NOTE: Must purchase floor prep/ cleaning products shown below to validate manufacturer warranty.

F.O.B. FACTORY

MADE IN

ITEM NO.	PRODUCT	EACH
SEE ABOVE	Dura-Poxy (above), 1 Gallon (Specify color and surface)	\$186.95
	Quartz, 50 lb Bag	
	· ·	

Help Line Available. Call 952-888-1488

Degrease Rite Floor Prep/Cleaning

DURA-POXY COLORS

FAUN

WHITE

MADE IN USA

TILE RED

High-alkaline water-based industrial liquid cleaner, 11.5 pH. USDA approved. Cleans oils, grease, fats, wax, dirt and stains.

• 1 gallon covers up to 500 sq. ft.







CLEAR

Dura-Kleen Floor Prep/Cleaning

Heavy-duty acid-based industrial liquid cleaner, 5 pH w/detergents and water softener. Cleans scale and mineral stains.

• 1 gallon covers up to 300 sq. ft.



MADE IN USA

F.O.B. FACTORY **EACH**



ITEM NO. PRODUCT A468 1001 Dura-Kleen, 1 Gallon.....

ITEM NO. PRODUCT

A468 1002

D BENCHES

PRICES ARE SUBJECT TO CHANGE • MINIMUMS MAY APPLY • VISIT OUR WEBSITE FOR CURRENT PRICING

840.95

Plastic Lockers

Perfect for use in food processing plants or any wet environment.

- Maintenance-free washdown lockers are rust proof and non-corrosive.
- Engraveable aluminum ID plate on all lockers.
- Sanitary holes for easy drainage.
- One-piece, double-wall construction makes these lockers durable and easy to install.
- Available with sloped hoods for extra storage space.
- 36-inch lockers come with double-coat hook (1 each).
- 60-inch lockers come with double-coat hook (1 each) and shelf.

		BASE		. FACTORY
ITEM NO.	PRODUCT	DIMENSIONS	SHIP WT.	EACH
3177 7202	A. 18" w/Drain Holes	15" x 15"	. 10 lb	\$168.65
3177 7203	B. 18" w/Drain Holes and Hood	15" x 15"	. 12 lb	207.15
3177 7204	C. 36" w/Drain Holes	12" x 15"	. 19 lb	234.55
3177 7205	D. 36" w/Drain Holes and Hood	15" x 15"	. 21 lb	244.35
3177 7206	E. 60" w/Drain Holes and Hood	15" x 18"	. 42 lb	424.95
3177 5109	Wall Mount Installation Kit			105.25



Bollard Covers

Constructed from 1/8-inch thick polyethylene and $3M^{\text{TM}}$ reflective tape for durability and long service life.

- Patented GripperTabs[™] for fast and easy installation self-adhesive fingers stick to the bollard itself and the cover just slides over.
- UV rated against fading for 5 years.
- Cover colors: yellow, red, gray, white, blue and black.
- Reflective tape colors: red, black, white, yellow, orange and blue.
- Dome shape: flat or dome.


ITEM NO.	PRODUCT	MAX PIPE O.D.	EACH
B753 10041	4" Bollard Cover	. 4-1/2"	CALL
B753 10071	6" Bollard Cover	. 6-3/5"	FOR
B753 0006	8" Bollard Cover	. 8-3/5"	PRICING





SPECIAL ORDER

MADE IN

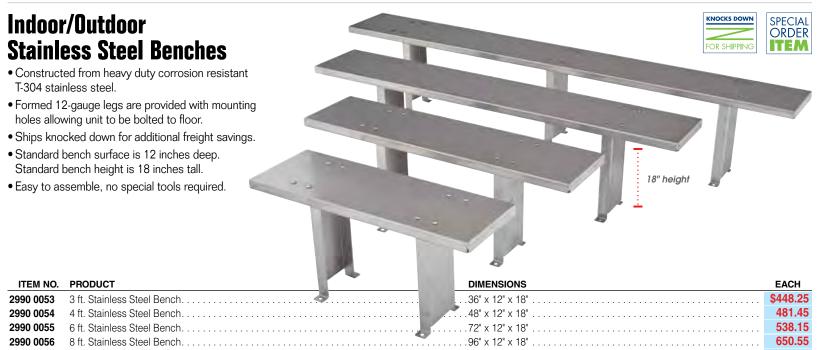

2990 0057

ISO-GUARDTM SANITARY BARRIERS

Iso-Guard™ Sanitary Barriers

Idea for production line operations to provide a sanitary barrier between workers.







Fixed-Mount Stainless Steel Model

Stainless steel frames can be moved around production line to wherever mounts are located.





Scan this QR Code with your mobile device to see how easy it is to attach frame to mount.



Tool-free removal from mount.

2. Snug-Mount Welded

F.O.B. FACTORY Ships from factory 7 days from order date.

3. Bolt-Mount

ITEM NO.	PRODUCT	EACH
2990 01561	Stainless Steel Iso-Guard™ Frame	\$159.95
2990 01571	Deep-Mount Welded Bracket for SS Frame	34.95
2990 01581	Snug-Mount Welded Bracket for SS Frame	34.95
2990 01591	Bolt-Mount Bracket for SS Frame	34.95
3538 0155	Light-Duty Solid Clear Plastic Shield* (24-1/2" x 58-1/2", 5/Pack)	419.95
J722 02291	Shield Bags, 32" x 60", Blue, 400/Roll	169.95
J722 02301	Shield Bags, 32" x 60", Clear, 400/Roll	169.95
	*Material in high demand – lead times will vary and can be up to 6 weeks. **This is a spe	




F.O.B. FACTORY Ships from factory 7 days from order date.

ITEM NO.	PRODUCT	EACH
3775 00801	Aluminum Iso-Guard™ Frame	\$145.95
J722 02291	Shield Bags, 32" x 60", Blue, 400/Roll	169.95
J722 02301	Shield Bags, 32" x 60", Clear, 400/Roll	169.95
3538 0155	Light-Duty Solid Clear Plastic Shield* (5/Pack)	419.95

 * Material in high demand – lead times will vary and can be up to 6 weeks. ** This is a special order item.

PLANT MAINTENANCE

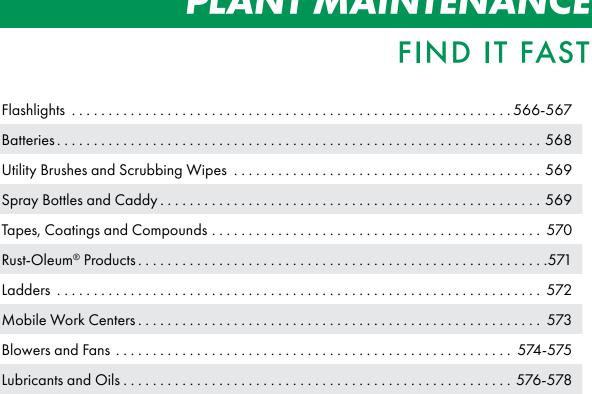

Absorbents and Soaker Pads......580-581



Multi-Use LED Water-Resistant Headlight



- Multi-use: headlight, magnet, hat clip, helmet.
- Includes 2 headstraps for wearing on head and rubber grip for helmet use.
- Adjustable spot to flood beam. High performance LED.



80 LUMENS Includes rubbei arip headstrap for attaching easily over hard hat.

ITEM NO. PRODUCT **LUMENS** \$21.95 **7784 20031** Multi-Use LED Headlight......80....

RoughNeck LED Flashlight

Aluminum body withstands 7 foot drop test and is IPX4 water resistant.

• 105-260 lumens adjustable spot to flood beam. • Compact design with 3 modes: low, high and strobe.

• Beam distance up to 110 meters (360 feet).



RAY®VAC



ITEM NO.	PRODUCT	LENGTH	LUMENS	EACH
7784 10231	RoughNeck LED Flashlight	. 6"	105-260	\$29.95

RAY@VAC **Sportsman Essentials**® **3C LED Glow Ring Flashlight**

Features a glow in the dark locator ring, which charges when the flashlight is in use and is IPX4 Water resistant.

- High performance LEDs and 2 modes: High (310 lumens) and energy saver (95 lumens)
- Beam distance: 141 meters (98 energy saver mode).
- 7-foot drop test performance (2 meters).
- Aluminum housing with non-slip grip.
- Uses 3 C batteries, (included).





ITEM NO. PRODUCT 7784 00961 Sportsman LED Flashlight......

Industrial™ **Flashlight**

RAY@VAC

- Constructed of high-impact polypropylene that is drop tested from 7 feet.
- · Resists chemicals, grease, oil, water and corrosion.
- Comfort-grip design with protected slide on/off switch.
- Length: 5-1/2 inches. With ring hanger.
- Uses 2 AA batteries. (included).



Brite RAY®VAC Essentials™ **Laser Pointer Flashlight**

RAY®VAC

- 9 LED flashlight with built-in laser pointer.
- Push button on/off.
- Aluminum construction with durable rubber grip.
- Uses 3 AAA batteries, (included).



7784 01061 Brite Essentials™ Flashlight

STREAMLIGHT.

Rechargeable PolyStinger® **Flashlight**

- Up to 11,000 candela, peak beam intensity, for seventy five minutes between charges.
- Xenon bulb adjustable spot-to-floor beam. ultra-tough nylon polymer casing and non-slip grip.
- Rechargeable up to 1,000 times, saving on replacement batteries.
- AC/DC charger included, as well as a cigarette lighter recharger.

NOTE: Spare bulb included.



ITEM NO. PRODUCT **3423 60011** Rechargeable PolyStinger®.....7.34".... 8.7 oz.

RAY®VAC

LED FLASHLIGHTS

Virtually Indestructible LED Spotlight

RAY®VAC

• High performance LEDs: 670 lumens, (80 energy saver mode).

• ANSI IP67 waterproof up to 1 meter, complete dust protection.

• 3 light modes: high, medium and low.

• 15-foot drop test performance.

• Battery run time: 8 hours, (40 energy saver mode).

• Beam distance: 440 meters, (164 energy saver mode).

• Shatterproof lens and reflector. • Over-mold rubber head.

• Impact resisting internal engineering and compact design.

• Includes handy wrist strap.

Uses 6 AA batteries (included).





RAY®VAC

RAYDVAC

UP TO


350

PRODUCT WEIGHT **LUMENS** \$39.95 **7784 00731** LED 6AA Spotlight.......4 lb.......80-750......

➌

Workhorse® Pro LED Virtually Indestructible Flashlight





impact resisting internal engineering. • 2 modes: high (350 lumens) and energy saver (70 lumens).

• Beam distance: 161 meters.

• IP67 waterproof up to 1 meter.

• 30 foot drop tested. • Length: 9-1/2 inches.

• Uses 2 AA batteries, (included).

ITEM NO. PRODUCT **EACH**

Virtually Indestructible LED Flashlight

Drop tested from 30 feet — the aluminum titanium body is so tough it will last a lifetime.


- Shatterproof lens and reflector.
- Rubber shock absorbers help protect impact-resistant internal parts.
- High performance LED has two modes: 300 lumens and 20 lumens (energy saver).
- Beam distance: 168 meters in regular mode; 45 meters in energy saver mode.
- Battery run time: 3 hours in regular mode; 39 hours in energy saver mode.
- ANSI IP67 waterproof up to 1 meter, complete dust protection.
- Uses 3 AAA batteries, (included).





ITEM NO.	PRODUCT	LENGTH	EACH
7784 10031	Virtually Indestructible Flashlight	5-3/8"	\$19.95

Dorcy LED Cyber Light



 Heavy-duty lens, durable rubber and plastic housing withstand a 10-foot drop test.

• Rubber grip, push button switch and nylon

Uses 4 AA batteries, (included).



0 01:107



HEWING.	Phoboci	LENGIH	EACH
3353 47501	Dorcy LED Cyber Flashlight	7-1/2"	\$29.95

6-Inch LED Penlight

- General purpose penlight clips conveniently in shirt pocket. Super bright white LED with beam distance up to 36 feet.
- Color will vary: blue, orange or silver.
- Uses 1 AAA battery, (included).

NOTE: Color can NOT be specified.












WARNING: The products on this page can expose you to chemicals including DEHP, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

PRICES ARE SUBJECT TO CHANGE MINIMUMS MAY APPLY
 VISIT OUR WEBSITE FOR CURRENT PRICING

RAY®VAC

FI ASHI ICHTS

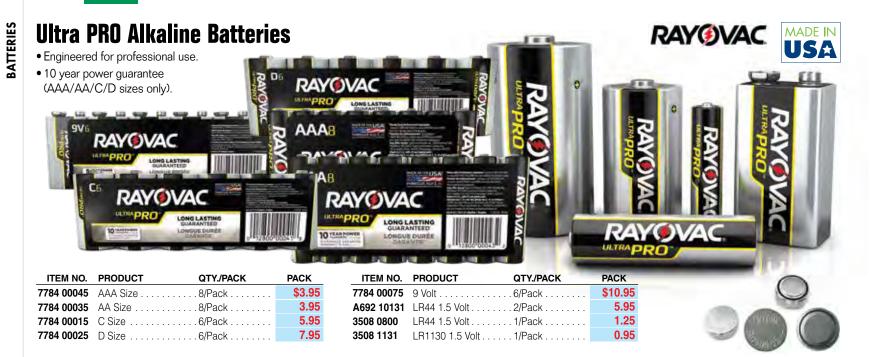

BATTERY REFERENCE CHART

Need a replacement battery for one of our products? Use this chart to help identify the correct batteries needed.

FLASHLIGHTS				
ITEM NO.	PRODUCT	BATTERY	QTY. REQ.	BATTERY NO.
7784 01061	Brite Essentials Flashlight/Laser Pointer	AAA	3	7784 00045
3353 00011	Dorcy Aluminum LED Flashlight	AA	2	7784 00035
3353 47501	Dorcy LED Cyber Light	AA	4	7784 00035
7784 20121	Industrial AA-Cell Flashlight	AA	2	7784 00035
7784 01021	LED Penlight	AAA	1	7784 00045
7784 20031	Multi-Use LED Headlight	AAA	3	7784 00045
7784 10231	RoughNeck LED	AAA	3	7784 00045
7784 00961	Sportsman LED Glow Ring Flashlight	С	3	7784 00015
7784 10031	Virtually Indestructible LED Flashlight	AAA	3	7784 00045
7784 00731	Virtually Indestructible LED Spotlight	AA	6	7784 00035
7784 01051	Workhorse Pro LED Flashlight	AA	2	7784 00035
THERMOME	TERS			
3098 51321	Atkins 351 Digital	AAA	2	7784 00045
3098 32301	Atkins EconoTemp w/HD Probe	AAA	3	7784 00045
3098 01131	Atkins EconoTemp w/Std. Probe	AAA	3	7784 00045
E542 70011	Big Red In-Line Thermometer	LR1130	1	3508 1131
E542 70021	Big Red Pocket Thermometer	LR44	1	3508 0800
E542 59091	Big Red T-Handle Thermometer	LR44	1	3508 0800
A692 00181	C48 Thermocouple	AA	2	7784 00035
3368 0377	Compact Chart Recorder	AA	1	7784 00035
3542 41211	Digital Thermometer	1.5 V	1	3508 0800
3443 1051	Heavy-Duty Digital Thermometer	1.5 V	4	A692 10131
A692 00011	Infrared Non-Contact Thermometer	9 V	1	7784 00075
3098 22091	Infrared Thermometer	AAA	2	7784 00045
4599 10401 4599 10501 4599 00071	Lollipop Thermometers	LR44	1	3508 0800
3098 0450	Pocket Thermometer	1.5 V	1	3508 0800
3368 00041	Temperature Chart Recorder	AA	1	7784 00035
3368 10081	Temperature Chart Recorder	AA	4	7784 00035
3542 98671	Thermocouple Therm, folding probe	AAA	2	7784 00045
4599 00081	ThermoTrace Infrared/Probe	AAA	2	7784 00045
3611 00441	Waterproof Digital Probe	1.5 V	1	3508 0800

SCALES				
ITEM NO.	PRODUCT	BATTERY	QTY. REQ.	BATTERY NO.
3416 20121	Checkweigh Scale	D	6	7784 00025
3416 00261	Low Profile Bench Scale	С	4	7784 00015
3416 00271	Low Profile Bench Scale	С	4	7784 00015
3416 00281	Low Profile Bench Scale	С	4	7784 00015
3416 3000	SS Washdown Safe Scale	AA	6	7784 00035
3416 0011	SS Washdown Scale	D	6	7784 00025
3416 0021	SS Washdown Scale	D	6	7784 00025
3416 1001	SS Washdown Scale	D	6	7784 00025
3416 2002	SS Washdown Scale	D	6	7784 00025
3416 5002	SS Washdown Scale	D	6	7784 00025
3416 00151	Washdown Compact Scales	D	6	7784 00025
3416 00161	Washdown Compact Scales	D	6	7784 00025
3416 00171	Washdown Compact Scales	D	6	7784 00025
3416 00181	Washdown Compact Scales	D	6	7784 00025
4893 00111	Washdown Portion Control Scales	D	4	7784 00025
4893 00211	Washdown Portion Control Scales	D	4	7784 00025
4893 00441	Washdown Portion Control Scales	D	4	7784 00025
4893 03211	Washdown Portion Control Scales	D	4	7784 00025
4893 30111	Washdown Portion Control Scales	D	4	7784 00025
4893 00391	Washdown Scale	D	6	7784 00025
4893 00401	Washdown Scale	D	6	7784 00025
4893 00411	Washdown Scale	D	6	7784 00025
4893 65551	Washdown Scale	D	6	7784 00025
METERS				
3024 0015	pH Meter	9 V	1	7784 00075
TIMERS AN	D STOPWATCHES			
A692 02641	Countdown Timer	AAA	1	7784 00045
4804 20001	Dual Function Stopwatch	LR44	1	3508 0800
3098 04081	Multi-Station Timer	С	4	7784 00015
3098 00151	TFS4 Timer	С	4	7784 00015
3244 46011	Water Resistant Stopwatches	LR44	1	3508 0800
	NEED LIELDS O			

NEED HELP? Our experienced customer service representatives are available **CALL 800-456-5624**

GOJO

MADE IN USA

CARLISLE



GOJO® Scrubbing Towels

Formulated to lift heavy dirt and grime from skin pores without dryness or irritation.

- Dual textured with a scrubbing side for removing tough soils and a smooth side for quick dirt absorption.
- Pre-moistened with a GOJO® heavy-duty cleaning solution.
 - Contains skin conditioners to help prevent dryness and irritation.
 - For use anywhere heavy-duty cleaning is required; no water needed.
 - 72-count bucket features SimPul™ Nozzle Technology, which virtually eliminates roping, providing one towel every time.

For More Hand Wipes ➤ SEE PAGE 161

ITEM NO.	PRODUCT	EACH
3540 63965	72-Count Bucket	\$14.95
3540 63985	170-Count Bucket (2 Pack)	59.95

24-Ounce Spray Bottles

- 9³/₄-inch dip tube.
- Bottles can easily be marked to identify contents.
- Adjustable spray pattern with full off position.
- Replacement pump available (sold separately, listed below).
- Chemical resistant.







Bottles are labeled with safety
information and bilingual check off
grid (printed in English/Spanish)


ITEM NO.	PRODUCT	EACH
6710 01205	24 oz. Spray Bottles, Each with Spray Pumps (3-Pack)	\$9.95
6710 02461	Replacement Trigger Spray Pump, Red	1.95
E542 10881	White Repl. Trigger Sprayer	1.95

Stainless Steel Utility Brushes



Ideal for removing grease and deposits from small and tight areas.


• Stainless steel bristles allow for aggressive removal of grease.

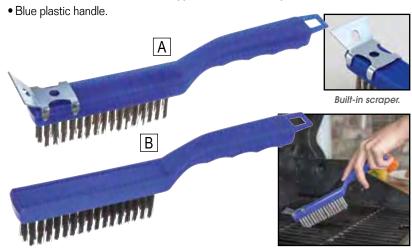

ITEM NO.	PRODUCT	EACH
6387 00501	A. 11-1/2" Utility Brush w/Scraper	\$13.05
	B. 11-1/2" Utility Brush w/o Scraper	

Deluxe Carry Caddy


• Holds up to eight 32-ounce spray bottles.






ITEM NO.	PRODUCT	DIMENSIONS	EACH
1770 54001	Deluxe Carry Caddy	15" x 11" x 7-1/2"	\$19.95

7-Inch Toothbrush-Style **Utility Brushes**



• Great for small jobs, tight areas and detail work, small parts, seams, threads and soldered joints.





	EACH	
PRODUCT	1-11	12+
A. 7" Utility Brush, Nylon Bristles	\$3.95	\$2.95
B. 7" Utility Brush, Brass Bristles	3.95	2.95
C. 7" Utility Brush, Stainless Steel Bristles	3.95	2.95
	A. 7" Utility Brush, Nylon Bristles	PRODUCT 1-11 A. 7" Utility Brush, Nylon Bristles. \$3.95 B. 7" Utility Brush, Brass Bristles. 3.95

NO,

All Purpose Duct Tape

Tears easily by hand and provides ease of application and handling.

- Tightly woven scrim provides high tensile strength.
- Aggressive, synthetic rubber adhesive provides instant adhesion to a wide variety of surfaces.
- Withstands a temperature range of +32 °F to +160 °F.
- 1.88 inches W x 180 feet (48 mm x 54.8 m) per roll.
- Core: 3 inches. 9 mil Color: silver. Each roll is individually wrapped.



Scotch® Super 33+™ **Vinyl Electrical Tape**

Stands up to the elements: from UV rays and moisture to alkalis, acids and corrosion.


- The tape's pressure-sensitive, rubber-resin adhesive and a durable PVC backing provide great protection.
- Measures 3/4 inch x 76 feet x 7 mil Color: black.
- Compatible with rubber and synthetic splicing compounds.


NO.

- UL Listed, ASTM Approved, CSA Certified and RoHS 2011/65/EU Compliant.
- Withstands a temperature range of 0 °F to 221 °F (-18 °C to 105 °C).


▶ 10 ROLLS PER CASE.		RO	LL
ITEM NO.	PRODUCT	1-9	10+
6655 15681	Super 33+ Vinyl Electrical Tape	\$11.45	\$10.45

Plasti-Dip Liquid-Rubber Coating





- Resists rust and corrosion.
- Remains flexible and stretchy over time an will not crack in extreme weather conditions.





▶ 4 GALLONS PER CASE



GALLON

		GALLON	
ITEM NO.	COLOR	1-3	4+
3176 44751	White	\$89.95	\$87.95
3176 44761	Red	89.95	87.95
3176 44771	Black	89.95	87.95

Freezer Kote

- Withstands temperatures from -40 °F up to +190 °F.
- Coating designed for cold storage application.
- One gallon covers 400 to 500 sq. ft.
- High-gloss finish dries in one hour.
- Suitable for USDA-inspected facilities.
- 1 gallon, 10 pounds.





▶ 4 GALLONS PER CASE.		GAL	LON
ITEM NO.	PRODUCT	1-3	4+
3027 13101	Freezer Kote	\$144.85	\$141.85

Evapo-Rust™ **Rust Remover**



- Non-toxic, non-corrosive and non-flammable formula removes rust in as little as 5 minutes.
- Easy to use just immerse rusted part in room temperature biodegradable, water soluble solution, then rinse with water.
- Safe for use in spray cabinets, ultrasonic cleaners, pressure washers, pumps and vats.



▶ 4 GALLONS PER CASE.		GALLON	
ITEM NO.	PRODUCT	1-3	4+
1210 00011	Evapo-Rust	\$25.95	\$24.95


STEEL-IT Stainless Steel Coating

The STEEL-IT Polyurethane Coating System features a unique stainless steel leafing pigment and provides optimum weather-, abrasion- and corrosion-resistance in general maintenance applications. The easy to apply system yields a hard, non-toxic, metallic finish that protects a multitude of surfaces from ultraviolet rays, chemicals, oils, alkalis, food acids, water immersion, abrasion and high-pressure washdowns.

• Industrial strength, non-dielectric stainless steel coating. • 250-300 sq. ft. coverage per gallon. • Prevents rust and corrosion.



TEM NO.	PRODUCT	1-11	12+
94 93741	Aerosol Can, 14 oz	\$32.95	\$31.95
GALLONS PER CASE.		GAL	LON





STEEL-IT Alkyd Primer

• 1 coat Alkyd Primer prior to Stainless Coating recommended for optimum corrosion resistance.

1-3

4 GALLONS PER CASE.		GAL	LON	
ITEM NO.	PRODUCT	1-3	4+	
3194 21031	Primer, 1-Gallon Can	\$192.95	\$187.95	

▶ 6 QUARTS PER CASE

ITEM NO.	PRODUCT	CASE
3194 2003	Primer, 1-Quart Can.	\$331.95

BUNZL | **KOCH** Supplies

ITEM NO. PRODUCT

RUST-OLEUM

RUST-OLEUM



LeakSeal® Self Fusing Silicone Tape

Rust-Oleum® LeakSeal® Self Fusing Silicone Tape conforms to any surface while providing a watertight seal.

- Creates a chemical- and moisture-resistant barrier that fixes leaky pipes and hoses, and covers frayed electrical wires.
- Easy to remove, leaves no sticky residue and protects from corrosion.
- Withstands temperatures -85 °F to 500 °F.
- Superior strength 700 psi.
- Corrosion and chemical resistant.



ITEM NO.	PRODUCT	QTY.	CASE	
A321 0004	10 ft. Roll, Opaque	6/Case	\$52.95	ĺ

Cold Galvanizing Compound

Instantly galvanize metal surfaces, or repair worn or damaged galvanized steel with Rust-Oleum® High Performance 7000 System Cold Galvanizing Compound.

- Contains 95% pure zinc in the dry film for maximum corrosion resistance.
- Protects and repairs bare sheet metal, galvanized ducts, storage tanks, etc.
- Self-priming; excellent adhesion to galvanized metal.
- Ideal for use in mild industrial environments.
- Meets USDA requirements for incidental food contact; meets Federal Specifications.*

*DOD-P-21035A; MIL-P-26915C



ITEM NO.	PRODUCT	QTY.	CASE
A321 0005	1 Quart	2/Case	\$83.95
A321 0002	1 Gallon	2/Case	368.50

LeakSeal® Flexible Rubber Coating

Repair and prevent leaks on a wide range of demanding surfaces with Rust-Oleum® LeakSeal® Spray.

- This rubberized coating provides a water-tight seal to fill small holes and provide firm-but-flexible protection against moisture and rust.
- Great for gutters, roofs, flashing, duct work, PVC, masonry, concrete and more.
- Paintable finish.





ITEM NO.	PRODUCT	QTY.	CASE
A321 0006	15 oz., Black Spray	6/Case	\$82.95
A321 0010	15 oz., ANSI Gray Spray	6/Case	82.95

InstaPatch® Concrete Repair

Quickly patch and repair damaged concrete floors with InstaPatch® Ultra-Rapid Curing Concrete Repair.

- InstaPatch® is a two component, 100% solid polyurethane concrete repair compound that cures in 15 minutes or less.
- Versatile formula can be poured or trowel applied. Virtually no odor.
- Gray InstaPatch® changes from black upon application to gray so you know when it's fully cured.
- Can be applied in temperatures as low as -5 °F.



Before grinding.





ITEM NO.	PRODUCT	EACH
A321 0012	1 Gallon Gray	\$156.95



STEEL-TECH™ Stainless Steel Rich Coating

Rust-Oleum's High Performance Steel-Tech™ Polyurethane Stainless Steel Rich Coating is infused with stainless-steel flakes to provide armor-like protection in harsh environments.



- Aerosol Spray matches Steel-Tech polyurethane coating for easy touch up and dries in only 20 minutes.
- Applies direct-to-metal (DTM) no primer or additional coat needed.
- Low-odor, one-component system no mixing required.
- Not for use on concrete, masonry or galvanized steel.
- Can be used on surfaces that reach up to 200 °F.
- Meets USDA requirements.

		F.O.	B. FACTORY
ITEM NO.	PRODUCT	QTY.	CASE
A321 0009	Aerosol Spray, 15 oz	6/Case	\$75.95







HAZMAT


Little Giant Safety Step Ladders

With a super-slim 5-inch folded depth the Little Giant Safety Step is the go-anywhere, do-anything stepladder. It's perfect for around the home or office.

• Features wide, slip-resistant treads for maximum stability and a fold-up safety bar with integrated tool tray.











E373 02101



E373 0310 B. 3-Step Ladder w/Bar and Tray 26" to Top Step 24-1/2 lb. **E373 0410 C.** 4-Step Ladder w/Bar and Tray 34" to Top Step 31-1/2 lb.



5-inch

storaae

width.

Α



Fiberglass > LOUISVILLE Step Ladder



- Molded top with handyman's tool slots.
- Pinch-resistant spreader braces. Heavy gusset bracing.
- Duty rated at 300 pounds. Slip-resistant rubber feet.



ITEM NO.	SIZE	SHIPPING WT.	EACH
3333 3016	4 ft	14 lb	\$102.95
3333 3017	6 ft		135.95
3333 3018	8 ft		179.95
3333 3019	10 ft		271.95
3333 3020	12 ft	46 lb	336.95

Multi-Purpose Aluminum Ladder

Four different ladder types in one — can be used as a twin step ladder, stairway ladder, scaffold and an extension ladder.

• Light-weight aluminum design. • Quick activating flip and snap-lock hinges. • Provides wider footprint for stability and versatility for the most

demanding projects.

• One man set-up. • Slip resistant rubber feet.

• Available in: 13-, 17- or 22-foot heights

• Load capacity: 300 pounds.





		STRAIGHT	TWIN	STAIRWAY	PLANK	F.O.B	FACTOR
ITEM NO.	SIZE	EXTENSION	STEPLADDER	LADDER	SUPPORT	SHIPPING WT.	EACH
3333 00161	13 ft	. 7' - 11'	3' - 5'	. 3' - 5'	. 1' - 2'	35 lb	\$273.95
						42 lb	
3333 00181	22 ft	. 11' - 19'	5' - 9'	. 5' - 9'	. 1' - 5'	50 lb	350.95





OR SHIPPING

SPECIAL ORDER

5-Drawer Mobile Work Center

A place for everything at a reasonable price.

- Cart weighs only 77 pounds.
- Work top supports up to 250 pounds.
- 5 metal drawers conveniently hold all your tools and supplies.
- Work top has built-in tool and parts holder, cord wrap and conversion table.

MADE IN



TradeMaster® Mobile Work Centers

- All-plastic design provides easy maintenance and quiet operation without rusting, denting, chipping or peeling.
- Molded in storage compartments and cup holder to keep tools accessible and organized.
- Raised ergonomic handle reduces wrist and back strain.
- Rounded corners help protect walls, doorways and furniture.
- 3-outlet, surge-protected power strip with 10 foot cord and wrap.
- 4 inch deep drawers with ball bearing slides allows for easy opening and closing.
- (A) Capacity: 750 pounds. (B) Capacity: 500 pounds.
- Locking 5-inch non-marking casters.
- Top shelf can hold refuse bin (optional). Ships knocked down.



Cabinet doors swing 270° for easy access and a heavy-duty cam lockina svstem.



		F.C	D. PACION
ITEM NO.	PRODUCT	DIMENSIONS	EACH
1770 4533	A. 4 Drawers w/Cabinet	. 49" L x 26-1/4" W x 38" H	\$1,483.00
1770 1388	B. 4 Drawers	. 40-3/5" L x 18-2/5" W x 33-2/5" H	1,483.00
1770 53881	Optional Refuse Bin		119.95

SHOP bunzlpd.com 24/7 **STAY CONNECTED WITH US: Need Help?** Chat With Us Online!

2-inch thick wheels with casters provide easy rolling portability; two of the casters have locks for safety.

EACH

DIMENSIONS

5-Drawer Work Center..... 32-3/5" x 19-4/5" x 33-1/2" **\$679.00**

PRICES ARE SUBJECT TO CHANGE MINIMUMS MAY APPLY
 VISIT OUR WEBSITE FOR CURRENT PRICING.

ITEM NO. PRODUCT

1770 3488

Sahara Pro X3 TurboDryer

Incredibly powerful static pressure and huge CFM volumes!

• Daisy-chain capability with built-in power outlet and circuit breaker.

• Low amp draw – 4 amps max!

• Excellent versatility with 3 speeds and 3 operating positions – 0° , 45° and 90° .

- Underside drying vent for drying under the airmover.
- Quick disassembly for cleaning.
- Rated airflow: 2700 CFM (4587 CMH).
- CFM/amp: 235.

ITEM NO. PRODUCT

F169 0351


- Static pressure: 1.28 inches (3.25 cm).
- CFM per 15 amp circuit: 2817 CFM, tested.
- Airflow velocity: 2,071 feet/minute (631 m/minute), tested.




Stainless Steel Food Service Fans

Designed to withstand moist/wet environments, high-pressure cleaning with concentrated caustic solutions without affecting performance or function.

- Constructed with electropolished 304 stainless steel.
- Meets USDA and NSF requirements for food zones.
- All stainless steel motor. Non-oscillating.
- Motor washdown specification is IEC-IP55.
- 1 phase, TENC, ball bearing, BISSC Approved motor.
- 20-inch fan: 115 V, 1/15 hp, 2 speed.
- 24-inch fan: 115/230 V, 1/4 hp, 1 speed.







		⊢ CF	М¬		F.O.	B. FACTORY
ITEM NO.	PRODUCT	HIGH	LOW	HP	SHIPPING WT.	EACH
F011 0833	A. 20" Wall Model .	2670	. 1670.	1/15 .	.52 lb	\$1,971.95
F011 0835	24" Wall Model .	5220		1/4	.62 lb	2,218.95
F011 0767	30" Wall Model .	8800		1/3	.64 lb	2,559.95
F011 0834	B. 20" Floor Model.	2670	. 1670.	1/15 .	.69 lb	2,094.95
F011 0836	24" Floor Model.					

Industrial Air Pivot Fans

- Four position easy reach switch with 10-foot three conductor cord and plug.
- 115 V, 1 phase, 3 speed, open drip proof, ball bearing motor.

• Nickel chrome guards meet OSHA requirements. • Choose from yoke mount, low or high stand.

• Aluminum propellers.

• Adjusts 360°. • UL/CUL listed.









NOTE: Yoke mount attaches to any surface with one bolt or lag screw (not included).

			CFM —			F.O.B	. FACTORY
ITEM NO.	PRODUCT	HIGH	MED	LOW	HP		EACH
F011 89741	A. 18" Low Stand	. 2,966	2,437 .	. 2,013	1/8		\$179.95
	20" Low Stand						
F011 89721	B. 18" Yoke Mount	. 2,966	2,437 .	. 2,013	1/8		190.95
F011 89701	20" Yoke Mount	. 3,390	2,755 .	. 2,295	1/5		210.95
F011 89691	C. 18" High Stand	. 2,966	2,437 .	. 2,013	1/8		238.95







Hanging Mount

Wall Mount

4-in-1 Direct Drive Fan

One fan with four mounting options (mounts included)!

- 30-inch fan: 1/4 hp, 115 V, 1 phase, ball bearing motor, 3 speeds.
- 36-inch fan: 1/2 hp, 115 V, 1 phase, ball bearing motor, 2 speeds.
- Epoxy coated guards, barrel and mountings.
- Shipping weights: 30-inch fan = 97 pounds; 36-inch fan = 119 pounds.
- Tiltable. Pull chain switch. UL/CUL listed.







HIGH

30" 4-in-1 Fan 5,670 . 4,590 . 3,410 . 1/4

MED

LOW



Powerful fans for use when moving a large amount of air.

- 115 V, 1 phase, 2 speed, ODP, 1/2 hp motor.
- Guards, barrel and propellers epoxy coated.
- Three bladed aluminum propeller.
- Two speed rocker switch.
- 8-inch steel wheels with rubber tires.

Portable Barrel

- Handle with cord wrap.
- 10-foot, three conductor SJT type cord.
- Dimensions: 46-inch cabinet size.
- Shipping weight: 130 pounds.
- UL/CUL listed.





		.0.0			
ITEM NO.	PRODUCT	HIGH	LOW	HP	EACH
F011 6002	42" Belt Drive Fan	.14,000	8,000 .	. 1/2 (2SP)	\$921.95

Industrial Grade Fan Components

Customize your fan according to the needs of your plant.



EACH

- A. Non-oscillating fan head available in 20 inch, 24 inch or 30 inch.
 20-inch fan head is 1/15 hp, 2 speed.
 24-inch and 30-inch fan heads are 1/4 hp, 3 speed.
- 15-foot cord with 3-prong plug included.

PRODUCT

ITEM NO.

F011 0470

F011 00051

- B. Solid pedestal base available in 26 inches or 32 inches.
- C. Wall/ceiling mount bracket includes safety cable kit.
- D. Snap-on wheel kit with set screw lock fits 20-inch to 30-inch pedestal fans.
- E. Adjustable pole allows fan to be used from 5 to 8 feet.



			CFM -		F.O.E	B. FACTORY
ITEM NO.	PRODUCT	HIGH	MED	LOW	WEIGHT	EACH
F011 71141	A. 20" Non-Oscil. Fan Head .	2,670 .		2,035	. 27 lb	\$329.95
F011 15901	24" Non-Oscil. Fan Head .	4,400 .	3,460	2,460	.39 lb	357.95
F011 15911	30" Non-Oscil. Fan Head .	6,100 .	4,400	2,700	. 48 lb	368.95
F011 11651	B. 26" Dia. Solid Pedestal Bas	e			17 lb	422.05
F011 11661	32" Dia. Solid Pedestal Bas	e			. 34 lb	152.05
F011 50021	C. Wall/Ceiling Mount Bracket				5 lb	82.15
F011 06011	D. Pedestal Wheel Kit				. 5 lb	191.25
F011 31011	E. Adjustable Pole, 5' to 8'				. 12 lb	129.95

UBRICANTS AND GREASE GUN

Magna-Plate Food Grade Grease

For use on machinery where grease may come into contact with edible product.

- White grease has excellent water-resistance and lubrication qualities.
- Good oil bleed characteristics at low ambient temperatures make it ideal for small, highspeed bearings.
- Choose from standard or hightemp grease. Standard grease is for temperatures under 250 °F (121 °C). High-Temp grease is for temperatures 500 °F (260 °C).
- Fits standard hand-operated grease gun.



▶ 10 PER PACK

ITEM NO.

5484 10501





MAGNA-PLATE

Clear-Guard Food Grade Grease

For use on machinery where grease may come into contact with edible product.

- Clear grease compounded with a high-temperature polymer will cling to metal surfaces under the most severe conditions.
- Water, salts, heat and chemicals will not affect performance.
- Resists sling and channeling under high-speed or hightemperature conditions.
- Fits standard hand-operated grease gun.







BDF Cling-Lube

For use on overhead chains, conveyors trolleys and way guides in meat and poultry processing plants.

- Contains MICRONOX® Technology*.
- High-cling, thick foaming, non-drip, overhead lubricant.





▶ 12 PFR CASE





		EACH			
ITEM NO.	PRODUCT	1-11	12+		
5484 02141	11 oz. Aerosol	\$15.35	\$13.35		

Food Grade Anti-Seize Compound

Prevents galling seizure, corrosion, wear and friction on fasteners, threads and joints.

- Apply with built-in cap brush to clean surface.
- Non-toxic, clean white color.
- Taste- and stain-free and kosher.



▶ 12 BOTTLES PER CASE





		EACH	
ITEM NO.	PRODUCT	1-11	12+
5484 01341	Food Grade Anti-Seize, 8 oz. Jar	\$17.55	\$15.55

Heavy-Duty Industrial Grease Gun

Heavy-duty cast iron head with cadmium plated togale and lever.

- Exclusive "Flip-Over" follower allows a superior seal for either cartridge or bulk loading applications.
- Extra-heavy follower spring ensures positive priming and uninterrupted pumping action.
- Jam-proof toggle mechanism prevents binding or bending of plunger.
- Precision-fit plunger prevents lubricant bypass and resists scoring.
- Lube Capacity: 16 ounce bulk; 14-1/2-ounce cartridge.



ITEM NO.	PRODUCT	LENGTH	EACH
3538 1142	Grease Gun	. 21-1/4"	\$69.45

USDA-NSF AUTHORIZATION CODES

	FOOD GRADE CATEGORY	APPLICATION	
	A 1	General cleaning products	
	A 7	Metal cleaners and polishes for non-food contact surfaces.	
	H1	Lubricants with incidental food contact.	
	H2	Lubricants with no food contact.	
	3H	Lubricants with direct food contact.	
Ī	P1	Compounds requiring a letter for authorized use.	
ľ			

Zerk Replacement Kit

• 100 assorted grease gun fittings in all popular sizes.





F.O.B. FACTORY ITEM NO. **PRODUCT EACH** 3538 6643

^{*}Micronox $^{\circ}$ food grade antimicrobial technology for product protection. JAX USDA/NSF authorized H1 lubricants containing Micronox incorporate proprietary food additive antimicrobial agents that provide antimicrobial protection to the lubricant from contamination as a result of indirect contact with processed foods or beverages. Use of this product is not a substitute for proper sanitation processes and protocols. Micronox® products contain an odor.

LUBRICANTS AND OILS

Dry-Glide All Purpose Silicone

For use on food packaging machinery, friction areas for films, wraps, cartons and large flat areas where a no-stick surface is needed.

- Food grade quick dry silicone lubricant can be used in all sanitary food plant applications.
- High silicone content, so there is little need to reapply as often - saving time
- and money. Available in a trigger spray bottle or as an aerosol.







- ▶ 12 SPRAY BOTTLES W/ONE TRIGGER SPRAYER PER CASE
- ▶ 12 AEROSOL CANS PER CASE. **EACH**

ITEM NO.	PRODUCT	1-11	12+
5484 00021	16 oz. Trigger Spray	\$14.00	\$12.00
5484 01081	10 oz. Aerosol	13.20	11.20
5484 04001	Trigger Sprayer Only	5.30	

Magna-Plate 74 Air Tool/Air Line Oil

Food grade oil for use on industrial air lines.

- Rust inhibitors help provide trouble-free operation of any air line system.
- Emulsifies exhaust system moisture.
- Premium additives protect internal components.
- Contains MICRONOX® Technology.*









Magna-Plate 78 Anti-Wear **Food Grade Lubricant**

For use on chains, slides, ways, bearings conveyors and food processing and packaging equipment.

- Food grade machinery oil should be used where there is a chance of incidental food contact.
- Contains MICRONOX® Technology.*
- Available in a trigger spray bottle or as an aerosol.







- ▶ 12 SPRAY BOTTLES W/ONE TRIGGER SPRAYER PER CASE.
- ▶ 12 AEROSOL CANS PER CASE ITEM NO PRODUCT

	EACH	
44		4

II EW NO.	FRODUCT	1-11	127
5484 00041	16 oz. Trigger Spray	\$14.25	\$13.25
5484 00031	11 oz. Aerosol	14.25	12.25
5484 04001	Trigger Sprayer Only	5.30	

Halo-Guard FG-2

- "Extreme Pressure" high-performance, hightemperature food machinery grease has oxidation stability and performance.
- Excellent rust and corrosion control.
- Water washout and chemical resistance.
- Contains MICRONOX® Technology.*





► 12 PER CASE.		EACH	
ITEM NO.	PRODUCT	1-11	12+
5484 00071	11 oz. Aerosol	\$15.35	\$13.35



PürGel Klear

MAGNA-PLATE

For applications where direct food contact is certain or likely.

- · Resists and retains moisture and creates a seal.
- For use on valves, rings, seals and gaskets.
- Great assembly paste of pumps.
- Pure, clean petrolatum. NSF registered.







▶ 12 PER CASE ITEM NO. PRODUCT **EACH**

1-11 12+ **5484 40021** 8 oz. PürGel Squeeze Tube.



Food Grade Penetrating Oil

Used by canners, dairies, meat packers, bottlers and bakers.

- Blend of the finest oils, solvents, wetting agents and molybdenum disulfide formulated to penetrate and loosen more effectively than a torch.
- Excellent spray-down oil to help eliminate rust after pressure washing or steam cleaning.
- Loosens corroded fasteners and speeds and protects during disassembly or retooling.
- Available in a trigger spray bottle or as an aerosol.
- ▶ 12 SPRAY BOTTLES W/ONE TRIGGER SPRAYER PER CASE.

▶ 12 AEROSOL CANS PER CASE.		EAC	Н
ITEM NO.	PRODUCT	1-11	12+
5484 00051	16 oz. Trigger Spray	\$15.35	\$13.35
	11 oz. Aerosol		11.20
5484 04001	Trigger Sprayer Only	5.30	











PRICES ARE SUBJECT TO CHANGE . MINIMUMS MAY APPLY . VISIT OUR WEBSITE FOR CURRENT PRICING.

MINERAL OILS AND SPRAYER

Food Grade White Mineral Oil

Fast and easy way to clean, lubricate and protect electric and manual food processing equipment.


- Authorized by USDA for use in federally inspected meat and poultry plants.
- Contains no GMO's. Kosher and VEGAN certified, gluten and allergen free, free of any VOC's and carries BSE/TSE statement.
- Suitable for use on food machinery and equipment.
- Can also be used for the lubrication of abrasive stones used for sharpening knives.
- Non-toxic and tasteless.

J134 0005



▶ 12 PER CASE.		EA	СН
ITEM NO.	PRODUCT	1-11	12+
J134 00011	A. 32 oz. Bottle w/Sprayer	\$10.95	\$9.95
▶ 4 PER CASE.		E/	ACH
ITEM NO.	PRODUCT	1-3	4+
J134 00021	B. 1 Gallon Bottle/Jug	\$26.95	\$25.95
ITEM NO.	PRODUCT		EACH
J134 0003	C. 5 Gallon Bucket		\$113.95
.1134 0004	D 55 Gallon Drum		940 95

275 Gallon Tote (Not Shown).....

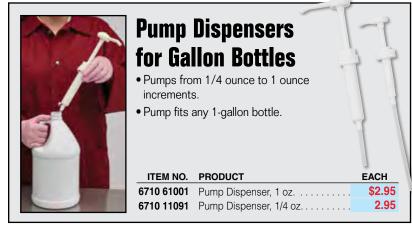



Sure Shot Sprayer



MADE IN

USA



- Filler cap stem fits standard compressed air chuck.
- Spring loaded trigger for easy volume control.
- Includes adjustable spray nozzle rated for use up to 200 psi.





Heavy-Duty Stainless Steel Faucet

- Adjustable shank designed to easily adjust to proper drain position after installing in drum.
- 3/4-inch NPT connection.
- PTFE gasket.
- Internal flame arrestor.
- FM approved for use with oils (under 30 SAE) and non-flammables, compatible with stainless steel.

ITEM NO.	PRODUCT	EACH
7447 20381	Heavy-Duty Stainless Steel Faucet	\$262.95

Zinc Die-Cast Drum Faucet

- Easy to use self closing faucet.
- Can be padlocked in closed position.
- Nylon gasket, 3/4 inch NPT connection.
- No flame arrester.
- FM approved for viscous liquids only.



ITEM NO.	PRODUCT	EACH
7447 2080	Die-Cast Faucet	\$28.95

Rotary Drum Pump

- Rugged cast iron construction.
- Durable phenolic veins.
- Self-priming.
- Three piece plated suction tube 47 inch assembled.
- 48-inch PVC discharge tube.



ITEM NO.	PRODUCT	WEIGHT	EACH
7447 0021	Rotary Drum Pump	. 15 lb	\$143.95

Hand-Operated Stainless Steel Piston Drum Pump

- Use with nitric acids, alkaloids and phosphoric acid.
- Made of type 304 stainless steel with polyethylene components.
- Fits standard 2-inch bung.
- Food approved.

Threaded adapter for 55-gallon drum.

ITEM NO.	PRODUCT	EACH
3323 01201	Stainless Steel Drum Pump	\$107.95
3323 9493	2" Threaded Adapter	36.95

Stainless Steel Drum Dolly

- Greater stability from strategically placed casters.
- 304 stainless steel construction with reinforced outriggers.
- Suitable for washdown applications.
- Four swivel white polypropylene and stainless steel casters.



ITEM NO.	PRODUCT	SIZE	WEIGHT	CAPACITY	EACH
7447 0197	SS Drum Dolly	55 Gallon.	22 lb	1,000 lb	\$438.95

Drum Wrench

- Constructed of spark-proof bronze.
- Offset handle reduces knuckle injury.



ITEM NO.	PRODUCT	SIZE	EACH
7447 2018	Drum Wrench	12" Length	\$59.95

Chrome-Plated Drum Pump

- Self-priming pump dispenses 22-ounce per stroke
- Chrome plating protects metal from the corrosive effects of water-based solutions.
- Teflon® coated packing seal increases chemical resistance.
- Fits standard 15-, 30- and 55-gallon drums with 2-inch standard FIP fittings.



ITEM NO.	PRODUCT	SIZE	EACH
6710 00261	Drum Pump	. 41-3/8" x 1-7/16"	\$46.95

Plastic Drum Pump

- Adjusts to dispense 2, 4, 6 or 8 ounces per stroke.
- Chemical and acid-resistant in design.
- Fits both 5-gallon pail with Rieke Senior Flexspout and 15, 30 or 55-gallon drums with 3/4-inch or 2-inch standard FIP fittings.
- All necessary adaptor fittings included.



ITEM NO.	PRODUCT	SIZE	EACH	
6710 01501	Plastic Drum Pump	. 48" x 3/5" Dia	\$20.95	

Universal Poly Spill Kit

(#)Impact


Absorption and disposal in one kit.


• Kits absorbs up to 5 gallons of spilled liquid and is designed to meet OSHA 29 CFR 1910.120 in a U.N. approved 6-1/2 gallon disposal container.



Universal Absorbent Socks

• Environmentally friendly and safe to use.







PRODUCT

ITEM NO.

6017 0004

6017 0001

6017 0035

6017 3440



Hazmat Absorbent Socks



Case of 20, Absorbent Socks 3" Dia. x 4'

Case of 40, Absorbent Socks 3" Dia. x 4'

ITEM I	NO.	PRODUCT	SIZE	CAPACITY	CASE
6017 034	44	Case of 4, HazMat Socks	3" Dia. x 4'	5 Gallon	\$18.95
6017 34 ⁻	10	Case of 10, HazMat Socks	3" Dia. x 4'	12-1/2 Gallon	44.95
6017 342	20	Case of 20, HazMat Socks	3" Dia. x 4'	25 Gallon	90.95
6017 344	41	Case of 40, HazMat Socks	3" Dia. x 4'	50 Gallon	164.95

► SEE PAGE 280

FOR BIOHAZARD ABSORBENT KITS



Impact


MADE IN

USA

ColdForm™ Drum Cover Pads



- Offers outstanding absorbency and durability, while being constructed of natural fibers.
- Manufactured with almost no dependency on either foreign or domestic oil.
- Out-performs polypropylene by up to 30%.
- Manufactured utilizing largely American-grown renewable resources.
- Constructed from a single layer of extremely fine natural fibers. Enhanced by chemistry and minimal use of synthetic fibers.



▶ 25 PER CASE.

ITEM NO.	PRODUCT	COLOR	SIZE	CASE
6017 00475	A. Universal Heavy-Weight	Gray	. 22" Dia	\$99.95
6017 00465	B. Oil Only Heavy-Weight	White	. 22" Dia	104.95

Oil-Only Poly Spill Pads



- Absorbs petroleum products while repelling water and water-based liquids.
- Absorbs 15 gallons.
- Perforated for easy tear.
- Bonded for durability.
- Heavy-weight.





▶ 100 PADS PER BALE

ITEM NO.	PRODUCT	COLOR	SIZE	BALE
6017 0012	Poly Spill Pads	. White	.15" x 18"	\$58.95

Universal Heavy-Weight Spill Pads



- Designed to pick up spills on contact, stop liquids from running, and prevent tracking in the workplace.
- Absorbs up to 15 gallons per bale.
- Perforated for easy tear.
- Dark gray color helps hide grease and grime.



ITEM NO.	PRODUCT	COLOR	SIZE	BALE
6017 1012	Poly Spill Pads	Gray	15" x 18"	\$75.95

BUNZL | **KOCH** Supplies

Universal Super Absorbent

The safe, easy and economical spill clean up.

- Absorbs 7-1/2 times more than clay up to 14 gallons per box. More economical than paper towels.
- Accepted by landfills non-leaching.
 Absorbs oil and water based liquids.
 Quick absorption for fast clean up.
 Light-weight and easy to handle.
- Leaves surface dry and slip free. Non-toxic and environmentally friendly. Meets USDA, FDA and EPA requirements.







XSORB Spill Clean-Up

- Plastic bottles with screw-on caps designed to fit in the Spill Station (shown left).
- Refilling the bottles with the 25-pound box is simple and easy, saves time, money and the environment.





EcoLogo

4 BOTTLES PER CASE CASE 6 qt. Bottles 10 lb.

PRODUCT **BOX DIMENSIONS** 6017 0025 25 lb Box 16-1/2" x 14" x 22-1/4"

> BOX \$34.95

ShurFoot Non-Slip Floor Compound

- Absorbs grease, oil and blood.
- 50-pound box.



EACH 50 lb Box

Absorb-A-Trac

ITEM NO.

6017 0036

• Sprinkle over floors, walkways and work areas for sure footing in slippery areas.

PRODUCT

- Doesn't contain sawdust, won't hold odors.
- Sweep or hose down at end of day.
- 50-pound box.



ITEM NO. PRODUCT 4418 3057

EACH

Biofresh™ Disinfecting Absorbent

- Easily cleans up biohazard accidents such as vomit, blood and other body fluids while treating the spill with a powerful disinfecting agent.
- Turns contaminated liquids to solid waste for fast, easy disposal.
- Each canister can absorb and disinfect up to 1/2 gallon of liquid.

EACH



ITEM NO. PRODUCT **6017 10091** Shaker Canister..... **Safety Sorbent Non-Slip** Floor Compound

Instant traction on slippery floors.

- Sprinkle over floors, walkways and work areas where water, grease or oil accumulate.
- Contains no sawdust, won't hold odors.
- Sweep or hose down at the end of each day.



ITEM NO. PRODUCT 7070 0010 2-1/2 lb Carton

ITEM NO. PRODUCT

Wire Rack

(50) Disposal Bags

Instruction Label

SPRAYERS

Stainless Steel Sprayers



Heavy-duty stainless steel tanks are built for durability at an economical price.

- Large funnel top for ease of filling with a reinforced chemical-resistant hose.
- Adjustable and fan nozzle.
- Features Viton® gaskets and seals.
- Plastic valve with brass extension.
- Plastic pin-to-cone and fan spray tips.
- Available in 2 gallon with 12-inch brass extension or 3 gallon with 18-inch brass extension.



1, 2 or 3-Gallon Poly Molded Sprayers USA



- An economical heavy-duty, poly molded design.
- Features Viton® gaskets and seals.
- Funnel top design for ease of filling.
- Braided reinforced hose with durable plastic valve and extension with
- Available in 1 or 2 gallon with 12-inch brass extension or 3 gallon with 18-inch brass extension.
- Adjustable nozzle.
- 30-inch hose.



ITEM NO.	PRODUCT	EACH	
4828 00061	1-Gallon Plastic Sprayer	\$35.95	
4828 23381	2-Gallon Plastic Sprayer	52.95	
4828 24381	3-Gallon Plastic Sprayer	61.95	

3-Gallon Economy Poly Molded Sprayer

• An economical heavy-duty, poly molded design.

• Funnel top design for ease of filling.

 Braided reinforced hose with durable plastic valve and extension with pin-tocone spray tip.

ITEM NO. PRODUCT

• Color: white.



\$16.65

MADE IN USA

Foaming Noz	
Easily converts spra	yers to foamers!
Attaches to all sprayer nozzles.	
ITEM NO. PRODUCT	EACH

4828 19001 Foaming Nozzle.....

4828 00051 3-Gallon Sprayer

Commercial Bak-Pak® Sprayer

4 gallon/16 liter usable capacity.

4828 26001 3-Gallon SS Sprayer

- Viton® seals provide maximum chemical resistance.
- Extra-long 20-inch poly spray wand. Shipping weight: 11 pounds.
- Extra-large fill opening prevents spills when adding chemicals.
- Locking shut-off valve is thumb-operated and comfortable to use.
- Bonus nozzle system includes four nozzles with different spray settings to allow for the precise droplet size. • Comfortable carrying straps.
- Pressurizing this sprayer is easy with the powerful piston pump.
- Dimensions: 21 inches H x 14-1/2 inches W x 8-3/4 inches D.

ITEM NO. PRODUCT **EACH 6829 31941** Bak-Pak® Sprayer (Includes Four Nozzles).....


213.75



Ergo comfort shut-off valve.



Wide mouth opening.





Pump handle can be used with left- or right-handed pumping.

INCLUDES FOUR, Easy-To-Use Nozzles









power sprayer-style hose stands up to harsh chemicals and resists kinking or clogging.

Braided

BUNZL | **KOCH** Supplies

GT-180S Adhesive Trap

Attractive, durable and industrial white, painted steel design.

- Hinged, easy access door allows quick replacement of UV insect lights and glue board adhesive panels.
- Easy-to-clean. Just replace adhesive trapping boards.
- 24-hour, non-chemical trapping.
- Energy-efficient UV Insect Lamps.
- Attraction range: 1,500 square feet (40 lineal feet).
- UV Light output: 30 Watts two 15-Watt bulbs.
- FDA and USDA accepted under current code.
- Glueboards: (1) 9 inch x 16 inch; (1) 3 inch x 19 inch. • UL approved/listed.



GARDNER

MADE IN

USA

Patented glueboard roller guides for easy replacement.

E7! E7

ITEM NO.	PRODUCT	EACH
E756 0006	GT-180S Light Trap, 19-1/2" x 3-1/2" x 11-1/2"	\$192.95
	EL-63 Replacement Glue Boards, 3" x 19" Black (10 Pack)	
E756 00165	EL-61 Replacement Glue Boards, 9" x 16" White (10 Pack)	33.95
E756 00055	EL-62 Replacement Glue Boards, 9" x 16" Black (10 Pack)	33.95
F756 00135	18" Replacement Shatter-Coated Bulb 15 Watt	16.95

GT-220SS Stainless Steel Adhesive Trap

Open grid emits the maximum amount of light on all sides.

- 24-hour, non-chemical trapping.
- Energy-efficient UV insect lamps.
- Attraction Range: 1,800 square feet (50 lineal feet).
- UV Light output: 40 Watts two 20-Watt lamps.
- FDA and USDA accepted under current code.
- UL approved/listed, 115 V/60 Hz, with 6-feet cord.





GARDNER

MADE IN

USA

ITEM NO.	PRODUCT	EACH
E756 0010	E756 0010 GT-220S Stainless Steel Light Trap, 24-3/4" x 3-3/4" x 9"	
E756 00045	EL-58 Replacement Glue Boards, 5" x 22" White (24 Pack)	37.85
E756 00175	EL-59 Replacement Glue Boards, 5" x 22" Black (24 Pack)	40.95
E756 00311	24" Replacement Shatter-Coated Bulb, 20 Watt	19.95

Wasp and Hornet Killer

- Jet sprays up to 20 feet, killing pests from a comfortable distance.
- Can be used indoors or outdoors

	•	· 12 PER CASE.
ITEM NO.	PRODUCT	CASE
7507 5839	16 oz. Aerosol Can	\$70.95

GT-215SS Slimline Adhesive Trap

GARDNER MADE IN USA

Thin design with stainless steel front that conceals insects while maintaining effectiveness.

- Position 5-6 feet above the floor for best results.
- 24-hour, non-chemical trapping. Energy-efficient UV Insect Lamps.
- Attraction range: 1,500 square feet (40 lineal feet). Stainless steel finish.
- UV Light output: 30 Watts. 115 V/60 Hz, with 6-feet cord.







ITEM NO.	PRODUCT	EACH
E756 0012	GT-215SS, Stainless Steel, 18-3/4" x 2.3" x 12"	\$202.35
E756 00165	EL-61 Replacement Glue Boards, 9" x 16" White (10 Pack)	33.95
E756 00055	EL-62 Replacement Glue Boards, 9" x 16" Black (10 Pack)	33.95
E756 00081	T8, 18"	13.95

GT-480S Industrial Adhesive Trap



For use in shipping/receiving areas and food production facilities where flying insect activity is high.



- Utilizes 3 large adhesive insect trapping boards for maximum capacity.
- Patented roller guides for easy replacement. 24-hour, non-chemical trapping.
- UV Light output: 80 Watts. Attraction range: 3,500 square feet.
- Easy open front door. 432 square inches of trapping surface.
- White, painted steel design.



ITEM NO.	PRODUCT	EACH
E756 0001	GT-480S Industrial Light Trap, 48-3/4" x 3" x 11-1/2"	\$305.95
E756 00165	EL-61 Replacement Glue Boards, 9" x 16" White (10 Pack)	33.95
E756 00055	EL-62 Replacement Glue Boards, 9" x 16" Black (10 Pack)	33.95
E756 00031	T12, 48"	22.95



Labeled shatterproof coating on bulbs forms a protective envelope to minimize the dangers of broken glass and meets auditing standards



PRICES ARE SUBJECT TO CHANGE • MINIMUMS MAY APPLY • VISIT OUR WEBSITE FOR CURRENT PRICING.

Door Gaskets and Sealants

Sewn Fabric Over 3/4-Inch PVC

- Replacement gasket for sliding doors and frames.
- Size: 3/4 inch dia. x 1-1/4 inch x 25 feet.



ITEM NO.	PRODUCT	ROLL
3538 1542	PVC/Fabric	\$197.85

Sewn Fabric Over 1/2-Inch PVC

- Cooler and freezer door use.
- Size: 1/2 inch dia. x 1-3/8 inch x 25 feet.



ITEM NO.	PRODUCT	ROLL
3538 0013	PVC/Fabric	\$108.35

Silicone Smokehouse Gasket



MADE IN

- Replacement smokehouse gasket.
- Maximum temperature: 450 °F.
- Size: 1 inch x 2 inch.
- Available in 25-, 50- or 100-foot rolls.



Cross section closeup



ITEM NO.	PRODUCT	LENGTH	ROLL
3538 01211	Silicone Gasket	.25 ft	\$347.35
3538 01221	Silicone Gasket	.50 ft	692.55
3538 8469	Silicone Gasket	.100 ft	1,295.35

Neoprene Refrigeration Gasket, Black

- Easy to fit, cut and shape for custom gasketing and sealing applications.
- Size: 13/16 inch x 2-3/4 inch x 25 feet.



federally inspected meat and poultry plants.

• Effective operating range: -60 °F to 400 °F.

Neoprene Refrigeration Gasket, White

• Size: 7/8 inch x 2-3/4 inch x 25 feet.



20 / 22 / / 20 / 10		
ITEM NO.	PRODUCT	ROLL
3538 0962	Neoprene, White	\$80.95

Neoprene Gasket

- Temperature range: -40° to 130 °F. Closed-cell.
- Size: 1/2 inch x 1-1/4 inch x 25 feet.





adhesive backina

▶ 25 FEET PER ROLL.

ITEM NO.	PRODUCT	ROLL
3538 1543	Non-Adhesive	\$26.25
3538 1544	Adhesive	29.45

Silicone Caulk/Sealant



EACH

\$9.95

1-23 \$10.95

Caulk/Sealant
 Meets FDA and USDA requirements for use in
 Silicone Sealant
 Will not crack, crumble or dry out.

<u> NO</u>

Rubberized

- Temperature range: -60 °F to +450 °F.
- Meets FDA and USDA requirements for use in federally inspected meat and poultry plants.

PIZ PER CASE.

BH 1 1 D				
▶12 PER CASE. EACH				
ITEM NO.	PRODUCT	1-11	12+	
3149 12881	White, 11 oz	\$9.75	\$8.75	
3149 12891	Clear, 11 oz	9.75	8.75	

Multi-Purpose Adhesives



- Specially formulated for bonding fiberglass reinforced plastic to various substrates.
- Fast setting and resistant to temperature changes.



ITEM NO.	PRODUCT	EACH
3149 1359	11 oz. Tube	\$7.25
3149 0006	4-Gallon Pail, Latex-Based	83.95

Overnight Concrete Floor Patch Kit

3470 03701 Clear Caulk, 13.3 fl. oz. . .

• Gray sand/epoxy patch.

ITEM NO. PRODUCT

- May be used in temperatures as low as 50 °F.
- Kit covers 15 sq. ft. x 1/4 inch thick.
- Instruction and mixing kit included.



and mixing kit included.	
PRODUCT	EACH
Overnight Concrete Floor Patch Kit	\$125.95

► SEE PAGE 141 and 562

FOR FLOOR CLEANERS AND COATINGS



Order \$400 or more and receive FREE SHIPPING

*Does not include UPS Next Day Air, 2nd Day or 3rd Day Select. This offer good only on orders shipped UPS Ground in the 48 contiguous states. Certain items may not qualify. Based on dimensional weight we will determine the most efficient means of shipping, either UPS or LTL. Products may ship by truckline.

ITEM NO. PRODUCT

3117 3509

Anti-Slip Dunnage Rack Cover Stand

- Ideal for converting dunnage racks to personnel stands.
- Keeps workers elevated off the floor.
- Anti-slip cover made entirely of aluminum with drainage holes.
- Corrosion resistant, all welded and easy to keep clean.

NOTE: Cover only. Dunnage rack sold separately.

ITEM NO.	DIMENSIONS	CAPACITY	SHIPPING WT.	EACH
3775 21361	20" x 36"	3,000 lb	11 lb	\$143.75
3775 21351	20" x 48"	2,500 lb	14 lb	216.25
3775 21341	20" x 60"	2,000 lb	18-1/2 lb	236.15




Ergo2000 Stand with KorDek-II Grating

- Fiberglass grate is gritted on both sides and can be used with or without the stainless steel stand for a comfortable anti-slip surface.
- Stand is easily adjustable from 4-1/4 to 17-1/4 inches.
- Stainless steel frame with a load capacity of 900 pounds.
- Shipping Weight: 125 pounds.

► SEE PAGES 269 - 271

For More Ergonomic Stands and Mats.

ITEM NO. PRODUCT **EACH 3523 6543** Ergo2000 2' x 4' Stand (includes grating). . . .







Fiberglass, Square Grid Floor Grating

• Weighs about one-quarter as much as steel grating.

• Available with a grit top or a concave, plain meniscus top.

• Integral grit top surface provides outstanding anti-slip protection for workers.

- Unlike metal grating, GatorGrate does not rust, never needs painting and is corrosion-resistant.
- Easy-to-clean. Smooth, tapered bars allows debris that enters the top to come out of the bottom.
- Can be easily cut with ordinary hand tools, using a masonry, carbide tip blade or diamond edge.

NOTE: More sizes available. Call for more information.

1-Inch Grating

Slip-Resistant Grit Top

			EACH	
ITEM NO.	SIZE	COLOR	1-2	3+
0760 0022	1" x 4' x	12' Gray	\$699.00	\$689.00
0760 0023	1" x 4' x	12' Green	699.00	689.00
0760 0024	1" x 4' x	12' Yellow	699.00	689.00
0760 0025	1" x 3' x	10' Gray	529.00	519.00
0760 0026	1" x 3' x	10' Green	529.00	519.00
0760 0027	1" x 3' x	10' Yellow	529.00	519.00


1" x 5" x 10" available. Call for details

1-Inch Grating

Slip-Resistant, Plain Concave Meniscus Top

			EACH	
ITEM NO.	SIZE	COLOR	1-2	3+
0760 0004	1" x 4' x 12'	Gray	\$569.00	\$559.00
0760 0005	1" x 4' x 12'	Green	569.00	559.00
0760 0006	1" x 4' x 12'	Yellow	569.00	559.00
0760 0007	1" x 3' x 10'	Gray	419.00	409.00
0760 0009	1" x 3' x 10'	Yellow	419.00	409.00

1" x 5" x 10" available. Call for details.



SPECIAL ORDER

F.O.B. FACTORY

1-1/2-Inch Grating

Slip-Resistant Grit Top

			EACH	
ITEM NO.	SIZE	COLOR	1-2	3+
0760 0031	1-1/2" x 4' x 12'	Gray	\$899.00	\$889.00
0760 0032	1-1/2" x 4' x 12'	Green	899.00	889.00
0760 0033	1-1/2" x 4' x 12'	Yellow	899.00	889.00
0760 0034	1-1/2" x 3' x 10'	Gray	669.00	659.00
0760 0035	1-1/2" x 3' x 10'	Green	669.00	659.00
0760 0036	1-1/2" x 3' x 10'	Yellow	669.00	659.00


1-1/2" x 5" x 10" available. Call for details

1-1/2-Inch Grating

Slip-Resistant, Plain Concave Meniscus Top

			EACH	
ITEM NO.	SIZE	COLOR	1-2	3+
0760 0013	1-1/2" x 4' x	12' Gray	\$729.00	\$719.00
0760 0014	1-1/2" x 4' x	12' Green	729.00	719.00
0760 0015	1-1/2" x 4' x	12' Yellow	729.00	719.00
0760 0016	1-1/2" x 3' x	10'Gray	549.00	539.00
0760 0017	1-1/2" x 3' x	10' Green	549.00	539.00
0760 0018	1-1/2" x 3' x	10' Yellow	549.00	539.00

 $1-1/2" \times 5" \times 10"$ available. Call for details



PRICES ARE SUBJECT TO CHANGE . MINIMUMS MAY APPLY . VISIT OUR WEBSITE FOR CURRENT PRICING