


Leakage distance, mm	292
Combined mechanical and electrical strical strength, kN	66.72
Mechanical impact strength, cm-N	621.34
Tension proof, kN	33.36
Time load, kN	44.48
Low - frequency dry flashover, kilovolts	80
Low - frequency wet flashover, kilovolts	50
Critical - impulse flashover, positive, kilovolts	125
Critical - impulse flashover, negative, kilovolts	130
Low - frequency puncture, kilovolts	110
Low - frequency test voltage, rms to ground, kilovolts	10
Maximum RIV at 1,000 kHz, microvolts	50
Colour of insulator glazed	Brown
Cylindrical Headed With Sanded Surfaces	

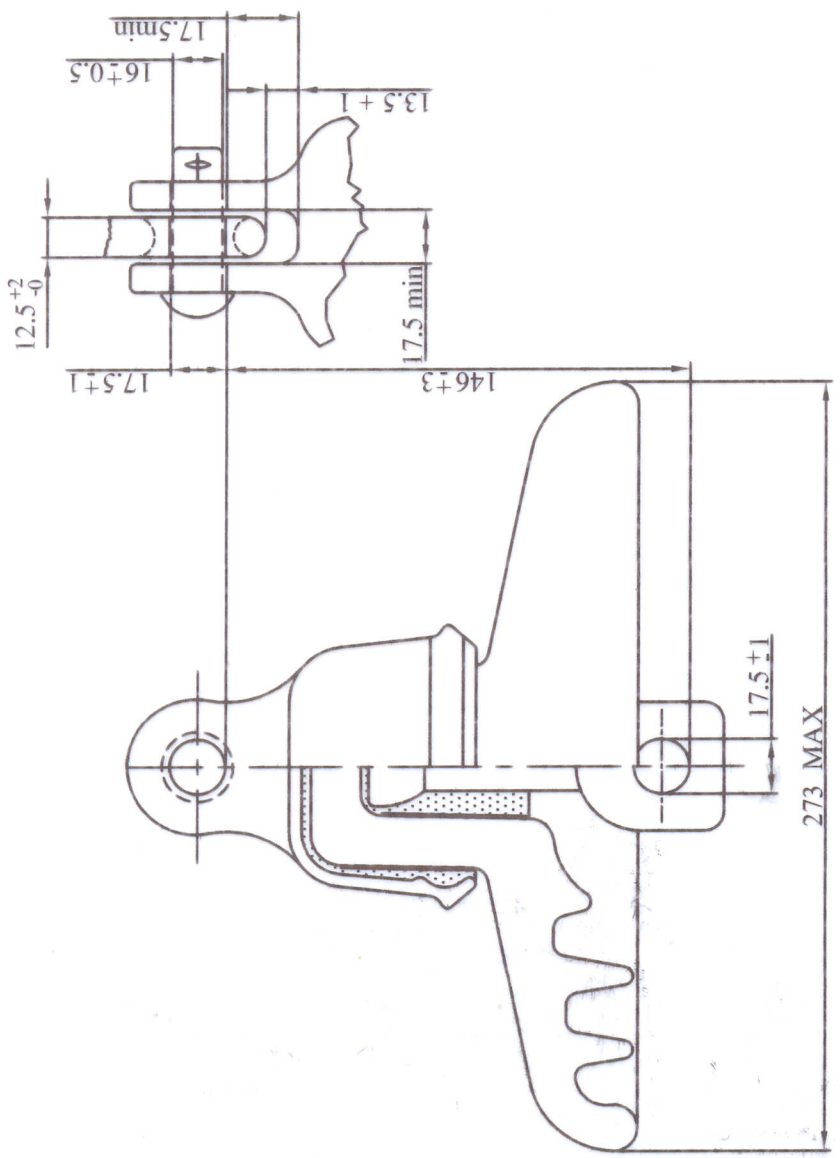

INSULATOR, SUSPENSION TYPE, ACCORDING TO TIS 354 (PORCELAIN) TYPE D
(CLASS 52 - 4), USED IN STRING FOR 22 KV AND 33 KV SYSTEM

CATALOGUE NO. SU - 524

SCALE : NTS. UNIT: mm.

DRAWN : *D.S.*

APPROVED : *enān*

ISSUE :
DATE: 3 / 1 / 2013
DRAWING NO. FAC - 080



MANAGEABLE INSULATOR COMPANY

FAC



15,000 lbs M-E
7,500 lbs test

THAILAND
YEAR

TIS.354 - 2528

บริษัท ผลิต วัสดุ ฉนวน ฟ้า ฟ้า
MANAGEABLE
INSULATOR CO.,LTD.
MAN

MARKING ON INSULATOR SUSPENSION TIS 354 - 2528 CLASS 52 - 4

SCALE : NTS. UNIT:

ISSUE :

DRAWN : *D.P.*

MANAGEABLE INSULATOR COMPANY

DATE: 17 / 3 / 2015

CATALOGUE NO. SU - 524

APPROVED : *enaf*

DRAWING NO. FAC - 082-1