
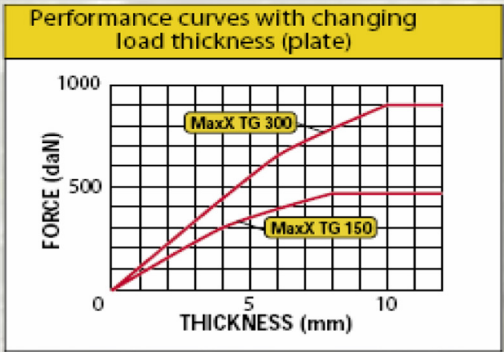


Hand controlled
magnetic lifters for thin
gage ferrous loads

THE EVOLUTION OF THE SPECIES

The special design of the polar surface together with a proper balancing of the magnetic masses located in the stator and in the rotor, has enabled to achieve an optimal concentration and distribution of the magnetic strength all over the contact area of the load, and thus allowing an easier totation of the handle whilst keeping the characteristics of safety and reliability of all the maxx lifters unchanged.

- solid block construction
- high power rare heart permanent magnets
- special treatment on all surfaces for corrosion and were protection

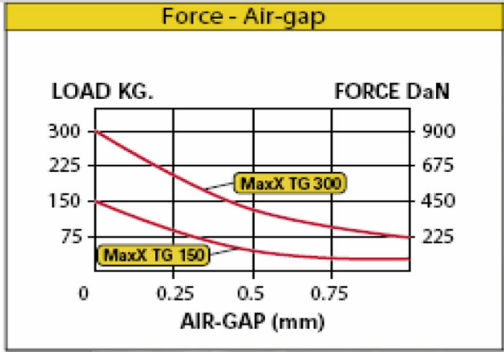

MaxX TG performance

	Force	Load max		Thick. min	Ø max	Length. max
	kg	plate kg	round kg	mm	mm	mm
MaxX TG 150	450	150	60	8	240	1500
MaxX TG 300	900	300	120	10	290	2000

MaxX TG dimensions and weight

	A	B	C	D	E	F	G	H	Weight
	mm	mm	mm	mm	mm	mm	mm	mm	kg
MaxX TG 150	142	130	31	79	189	170	43	35	6
MaxX TG 300	190	165	39	106	250	230	60	52	16