

LED ดาวไลท์ติดลอย รุ่น DLUX

LONG LIFE
LED
TECHNOLOGY



ป้องกันไฟกระชาก



EYECARE



LTDLPTR04SR



LTDLPTR04SS

IP20




รหัสสินค้า Code	รูปร่าง Shape	ชื่อสินค้า	ขนาดวัตต์ Power (w)	กำลังส่องสว่าง Lumen (lm)	แสง Color	อายุในการใช้งาน Life time
LTDLPTR04SR05I012W LTDLPTR04SS05I012W	Round Square	Surface Mount Panel (DLUX)	12W	1,200 lm	Warmwhite / Daylight (2700 - 3000K) / (6000 - 6500K)	30,000 Hrs.
LTDLPTR04SR08I018W LTDLPTR04SS08I018W	Round Square	Surface Mount Panel (DLUX)	18W	1,800 lm	Warmwhite / Daylight (2700 - 3000K) / (6000 - 6500K)	30,000 Hrs.
LTDLPTR04SR12I024W LTDLPTR04SS12I024W	Round Square	Surface Mount Panel (DLUX)	24W	2,400 lm	Warmwhite / Daylight (2700 - 3000K) / (6000 - 6500K)	30,000 Hrs.



General Information

Product	LED SURFACE MOUNT PANEL LIGHT (DIUX)
Beam Angle	120°
LED Color Temperature	2,700K - 6,500K
Dimmable	No
Connection	N/A
IP Code	20
Operation Temperature	-20°C ~ 40°C
Body Color	White
LED Chip	SMD 2835
Flamability Mark	Flame Retardancy
Lifetime to 70% Luminous ux	30,000 Hrs.
Lifetime to 90% Luminous ux	25,000 Hrs.
Failure rate at 5,000Hrs.	<0.5%
Ripple	N/A

Dimension

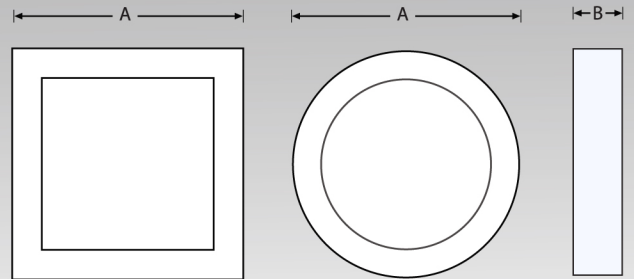

Dimensions : mm.

	A	B
LTDLPTR04SR05I012W	160	28
LTDLPTR04SS05I012W	160	28
LTDLPTR04SR08I018W	210	28
LTDLPTR04SS08I018W	210	28
LTDLPTR04SR12I024W	285	28
LTDLPTR04SS12I024W	285	28

Electrical

Power Consumption (W)	12W/18W/24W
Supply Voltage (V)	AC 85-265V
Line Frequency (Hz)	50-60Hz
Power factor (PF)	≥ 0.5

Mechanical

Housing Material	Aluminium
Cover Material	N/A
Cap Material	N/A
PCB Material	N/A
Driver	non-isolated IC driver

General Information

	12W	18W	24W
Number of LEDs	60	90	120
LED type	SMD 2835	SMD 2835	SMD 2835

