

LED ดาวไลท์ฝังฝ้า รุ่น DLUX

LONG LIFE
LED
TECHNOLOGY

ป้องกันไฟกระชาก

EYECARE



LTDLPTR04RR



LTDLPTR04RS

IP20

CE


มอก. 1955-2551

ENERGY
SAVING

30,000
HOURS

WARRANTY
1
YEAR


รหัสสินค้า Code	รูปร่าง Shape	ชื่อสินค้า	ขนาดวัตต์ Power (w)	กำลังส่องสว่าง Lumen (lm)	แสง Color	อายุในการใช้งาน Life time
LTDLPTR04RR05I009B LTDLPTR04RS05I009B	Round Square	Recessed Panel (DLUX)	9W	900 lm	Warmwhite (2700 - 3000K) / Daylight (6000 - 6500K)	30,000 Hrs.
LTDLPTR04RR06I012B LTDLPTR04RS06I012B	Round Square	Recessed Panel (DLUX)	12W	1,200 lm	Warmwhite (2700 - 3000K) / Daylight (6000 - 6500K)	30,000 Hrs.

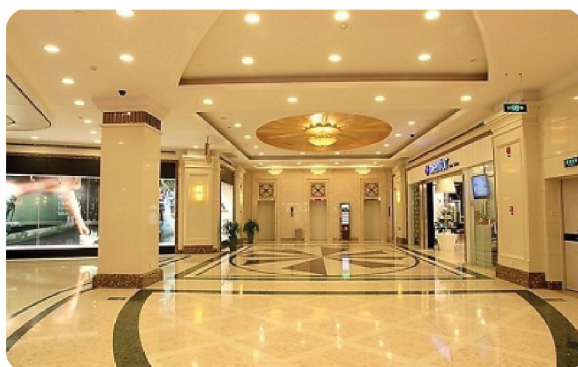

General Information

Product	LED RECESSED PANEL LIGHT (DLUX)
Beam Angle	120°
LED Color Temperature	2,700K - 6,500K
Dimmable	No
Connection	N/A
IP Code	20
Operation Temperature	-20°C ~ 40°C
Body Color	White
LED Chip	SMD 2835
Flamability Mark	Flame Retardancy
Lifetime to 70% Luminous ux	30,000 Hrs.
Lifetime to 90% Luminous ux	25,000 Hrs.
Failure rate at 5,000Hrs.	<0.5%
Ripple	N/A

Dimension

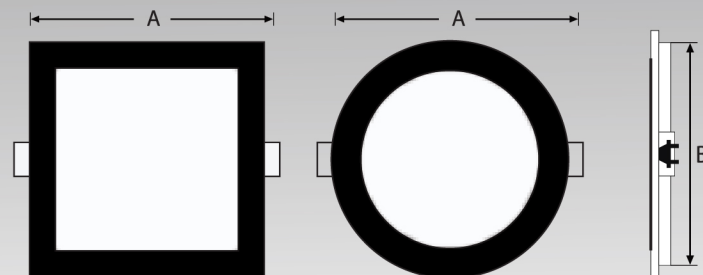

Dimensions : mm.

	A	B	Ceiling cutout
LTDLPTR04RR05I009B	145	125	Ø125
LTDLPTR04RS05I009B	145	125	125 X 125
LTDLPTR04RR06I012B	170	145	Ø145
LTDLPTR04RS06I012B	170	145	145 X 145

Electrical

Power Consumption (W)	9W/12W
Supply Voltage (V)	AC 85-265V
Line Frequency (Hz)	50-60Hz
Power factor (PF)	≥ 0.5

Mechanical

Housing Material	Aluminium
Cover Material	N/A
Cap Material	N/A
PCB Material	N/A
Driver	non-isolated IC driver

General Information

9W

12W

Number of LEDs

45

60

SMD 2835

SMD 2835

