



ป้องกันไฟกระชาก



WaterProof



ขยับ 360°

LUMILEDS
The Brighter LED

LED ฟลัดไลท์ รุ่น MAXIMUS



IP65 CE UoN. 1955-2551 ENERGY SAVING 30,000 HOURS

รหัสสินค้า Code	ชื่อสินค้า	ขนาดวัตต์ Power (w)	กำลังส่องสว่าง Lumen (Lm)	แสง Color	อายุในการใช้งาน Life time
LTFDLSM06DBXXX020G	LED FLOOD LIGHT (MAXIMUS)	20W	2,400 lm	Warmwhite (2700 - 3000K) / Daylight (6000 - 6500K)	30,000 Hrs.
LTFDLSM06DBXXX030G	LED FLOOD LIGHT (MAXIMUS)	30W	3,600 lm	Warmwhite (2700 - 3000K) / Daylight (6000 - 6500K)	30,000 Hrs.
LTFDLSM06DBXXX050G	LED FLOOD LIGHT (MAXIMUS)	50W	6,000 lm	Warmwhite (2700 - 3000K) / Daylight (6000 - 6500K)	30,000 Hrs.
LTFDLSM06DBXXX100G	LED FLOOD LIGHT (MAXIMUS)	100W	12,000 lm	Warmwhite (2700 - 3000K) / Daylight (6000 - 6500K)	30,000 Hrs.
LTFDLSM06DBXXX150G	LED FLOOD LIGHT (MAXIMUS)	150W	18,000 lm	Warmwhite (2700 - 3000K) / Daylight (6000 - 6500K)	30,000 Hrs.
LTFDLSM06DBXXX200G	LED FLOOD LIGHT (MAXIMUS)	200W	24,000 lm	Warmwhite (2700 - 3000K) / Daylight (6000 - 6500K)	30,000 Hrs.



General Information

Product	LED FLOOD LIGHT MAXIMUS
Beam Angle	120°
LED Color Temperature	2,700K - 6,500K
Dimmable	No
Connection	N/A
Safety Class	Class I
IP Code	65
Operation Temperature	-20°C ~ 50°C
Body Color	Gray
Installation Height	N/A
LED Chip	SMD
Flamability Mark	N/A
European Community Mark	N/A
Lifetime to 70% Luminous ux	30,000Hrs.
Lifetime to 90% Luminous ux	25,000Hrs.
Failure rate at 5,000Hrs.	<3%
Ripple	N/A

Electrical

Power Consumption (W)	20W/30W/50W/100W/150W/200W
Supply Voltage (V)	AC185-265V
Line Frequency (Hz)	50-60Hz
Power factor (PF)	0.9


Mechanical

Housing Material	Die-casting Al + Glass
Cover Material	Tempered Glass
Cap Material	N/A
PCB Material	Al
Driver	DOB

General Information

	20W	30W	50W	100W	150W	200W
Number of LEDs	36	42	80	160	240	320
LED type	SMD 2835	SMD 2835	SMD 2835	SMD 2835	SMD 2835	SMD 2835

Dimension

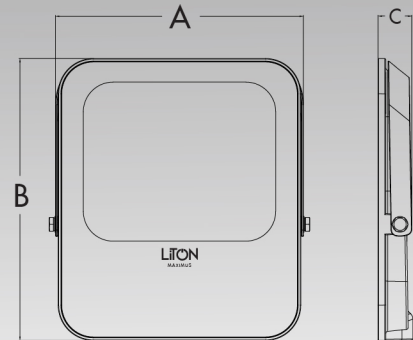

Dimensions : mm. A B C

	A	B	C
LTFLD SM06DBXXX020G	120.4	134.9	29.6
LTFLD SM06DBXXX030G	141.1	158.6	30.2
LTFLD SM06DBXXX050G	170.6	193.8	30.3
LTFLD SM06DBXXX100G	206.4	233.9	32.4
LTFLD SM06DBXXX150G	236.5	269	32.2
LTFLD SM06DBXXX200G	272.5	309.3	32.5

