

LED โคมไฟติดเพดาน รุ่น TRENDY



32W

BLOOM
(ลายดอกโขน)



32W

BLOSSOM
(ลายดอกโพ)



32W

SWIRL
(ลายหมุนวน)



32W

DIAMOND
(ลายทรงแผ่น)



32W


PLAIN WHITE
(ลายเรียบ)



IP20




รหัสสินค้า Code	ชื่อสินค้า	ขนาดวัตต์ Power (w)	กำลังส่องสว่าง Lumen (lm)	แสง Color	อายุในการใช้งาน Life time
LTCLBM01SR350032SDL	LED CEILING LAMP (BLOOM : ลายดอกโขน)	32W	3,000 lm	Daylight (6000 - 6500K)	30,000 Hrs.
LTCLBS01SR350032SDL	LED CEILING LAMP (BLOSSOM : ลายดอกโพ)	32W	3,000 lm	Daylight (6000 - 6500K)	30,000 Hrs.
LTCLSW01SR350032SDL	LED CEILING LAMP (SWIRL : ลายหมุนวน)	32W	3,000 lm	Daylight (6000 - 6500K)	30,000 Hrs.
LTCLDM01SR350032SDL	LED CEILING LAMP (DIAMOND : ลายทรงแผ่น)	32W	3,000 lm	Daylight (6000 - 6500K)	30,000 Hrs.
LTCLPL01SR350032FDL	LED CEILING LAMP (PLAIN WHITE : ลายเรียบ)	32W	3,000 lm	Daylight (6000 - 6500K)	30,000 Hrs.



General Information

Product	LED CEILING LAMP (TRENDY)
Beam Angle	120°
LED Color Temperature	6,000K- 6,500K
Dimmable	No
Connection	N/A
Safety Class	N/A
IP Code	20
Operation Temperature	-20°C - 50°C
Body Color	White
LED Chip	MLS
Flamability Mark	Flame Retardancy
Lifetime to 70% Luminous ux	30,000Hrs.
Lifetime to 90% Luminous ux	25,000Hrs.
Failure rate at 5,000Hrs.	<0.5%
Ripple	N/A

Dimension

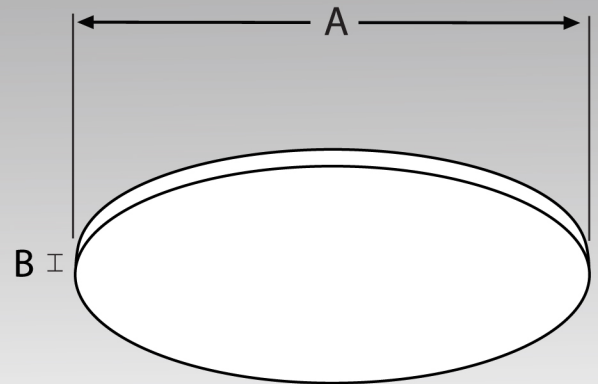

Dimensions : mm.

A

B

LTCLLBM01SR350032SDL	Ø 390	80
LTCLLBS01SR350032SDL	Ø 390	80
LTCLLSW01SR350032SDL	Ø 400	90
LTCLLDM01SR350032SDL	Ø 390	80
LTCLLPL01SR350032FDL	Ø 390	68

Electrical

Power Consumption (W)	32W
Supply Voltage (V)	180 - 265V
Line Frequency (Hz)	50 Hz
Power factor (PF)	0.5

Mechanical

Housing Material	PVC&IRON
Cover Material	PVC
Cap Material	N/A
PCB Material	N/A
Driver	DOB

General Information

32W

Number of LEDs	24
LED type	MLS

