

Hydraulic Winch : RUNVA HWN15000YD

Runva
Since 1989




Runva hydraulic winches provide you with a continuous duty solution to your winch requirements. Designed with the toughest commercial application in mind, all winches feature total reliability to handle sustained pulls.

Pull , Speed, Pressure, Flow (First layer)

Layer of wire rope	Rated line pull lbs (kgs)	Total rope on drum ft (m)
1	15000 (6804)	18.0 (5.5)
2	12120 (5498)	40.7 (12.4)
3	10168 (4612)	65.9 (20.1)
4	8757 (3972)	68.9 (26.5)

Line Pull And Rope Capacity Inlayer

Line pull lbs (kgs)	Pressure Mpa (PSI)	Flow G/min (L/min)	Line speed ft/min (m/min)
0	2.0 (290.1)	1.3 (5.0)	1.6 (0.5)
5000 (2268)	4.3 (623.7)	2.6 (10.0)	3.3 (1.0)
10000 (4536)	8.7 (1261.8)	5.3 (20.0)	6.6 (2.0)
12000 (5443)	10.0 (1450.3)	7.9 (30.0)	9.8 (3.0)
15000 (6804)	13.0 (1885.4)	15.9 (60.0)	19.7 (6.0)

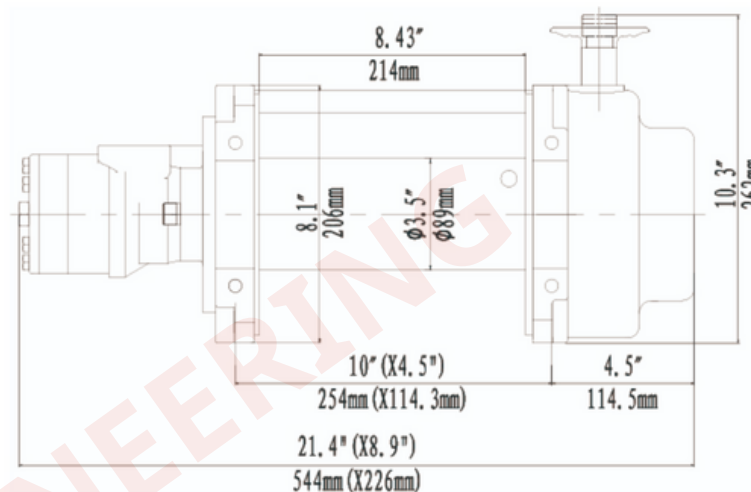

SPECIFICATION (HWN15000YD)

Rated line pull	15000 lbs (6804 kgs)
Motor displacement	80 ml/r
Oil flow	5-60 l/min
Pressure	13 Mpa
Gear reduction ratio	33.4 : 1
Cable (Dia. x L)	Ø15/32"x87 ' (Ø12mm×26.5m)
Drum size(DiaDrum size(Dia.x L).x L)	Ø3.5 "x8.5" (Ø89mm×217mm)
Mounting bolt pattern	10 "x4.5 " (254mm×114.3mm) 4-M12
Overall dimensions (L×W×H)	21.4"x10.0"x10.3" 544mm ×255mm ×262mm
Net weight lbs (kgs)	132 / 60