

Specifications

Accuracy : ±2.5%

Application : Water / Air

Tube material : Glass

Float material : 304SS

Guide rod material : 304SS

Housing Material : Aluminium

Seals: VITON

Working temperature : -20°C - 120°C

Connection : Flange (ANSI, JIS, DIN)

DN (mm)	Model	Water flow range (L/h)	Air flow range (Nm ³ /h)	Max. working pressure (Bar)
15	FA20S-15	4-40	0.12-1.2	10
		6-60	0.3-3	
		10-100	0.5-5	
		16-160	0.8-8	
		25-250	1.2-12	
		40-400	2-20	
		63-630		
25	FA20S-25	63-630	2-20	10
		100-1000	3-30	
		160-1600	5-50	
		250-2500	8-80	
40	FA20S-40	160-1600	5-50	9
		250-2500	8-80	
		400-4000	12-120	




FA20S Material

No.	Description	Material
1	Float	304SS
2	Housing	Aluminium
3	Screw cap	Aluminium
4	Flange	304SS

FA20S Dimensions (mm)

DN (mm)	Window size (axb)	L3	D			C			E		
			DIN	ANSI	JIS	DIN	ANSI	JIS	DIN	ANSI	JIS
15	33x235	425	95	89	95	65	60	70	4-Ø14	4-Ø16	4-Ø14
25	50x240	425	115	108	125	85	80	90	4-Ø14	4-Ø16	4-Ø19
40	65x235	425	150	127	140	110	98	105	4-Ø18	4-Ø16	4-Ø19
50	85x230	425	165	152	155	125	121	120	4-Ø18	4-Ø19	4-Ø19

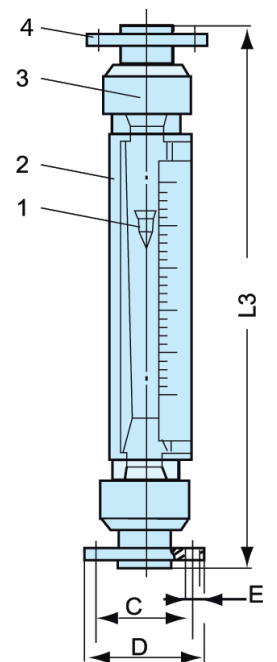

Unit:mm