

# VA20S Series . . . Glass Tube VA Flowmeter



## Specifications

Accuracy : ±2.5%

Service : Water / Air

Tube : Glass

Float : 304SS

Guide rod : 304SS

Housing : Aluminum

Seals: VITON

Working temperature : -20°C - 120°C

End Connection : Screw, Socket, Flange


End Connection : 304SS, Steel, UPVC

DN (mm)	Model	Water flow range (L/h)	Air flow range (Nm³/h)	Max. working pressure (Bar)
15	VA20S-15	4-40	0.12-1.2	10
		6-60	0.3-3	
		10-100	0.5-5	
		16-160	0.8-8	
		25-250	1.2-12	
		40-400	2-20	
		63-630		
25	VA20S-25	63-630	2-20	10
		100-1000	3-30	
		160-1600	5-50	
		250-2500	8-80	
40	VA20S-40	160-1600	5-50	9
		250-2500	8-80	
		400-4000	12-120	



## VA20S Series Dimensions (mm)

DN (mm)	Window size (axb)	L2	A	Screw connection		Weight (Kg)
				Standard	Option	
15	33x235	375	58	½"BSP	3/8"BSP	1
25	50x240	375	74	1"BSP	¾"BSP	1.8
40	65x235	375	92	1 ½"BSP	1"BSP	3.1

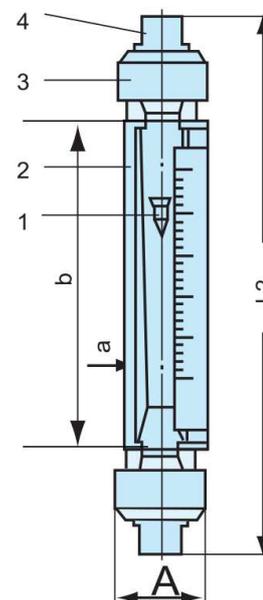

## VA20S Series Parts List

No.	Description	Material	
		Standard	Option
1	Float	304SS	-
2	Housing	Aluminum	-
3	Screw cap	Aluminum	UPVC
4	End Connection	304SS	Steel, UPVC

## End Connection Option

