

VA30G Series . . . Glass Tube VA Flowmeter

Applications

- Food and Beverage Industry.
- Semiconductor Industry.
- Pharmaceutical Industry.
- Liquid delivery systems.
- Water treatment and regeneration.
- Chemical industry.
- Swimming pools & Spas.
- Processing and manufacturing industry

Specifications

Accuracy : ±2.5%

Tube : Glass

Float & Guide Rod : 304SS, 316SS


Housing : 304SS

Pressure Limit : See Table

Temperature Limit : -20°C to +120°C

End connection : Tri-Clamp

DN (mm)	Model	Measuring Range		Working Pressure (Bar)
		Water (L/h)	Air (m³/h)	
15	VA30G-15	4-40	0.12-1.2	10 Bar
		6-60	0.3-3	
		10-100	0.5-5	
		16-160	0.8-8	
		25-250	1.2-12	
		40-400	2-20	
25	VA30G-25	63-630	2-20	10 Bar
		100-1000	3-30	
		160-1600	5-50	
40	VA30G-40	250-2500	8-80	9 Bar
		400-4000	12-120	
		160-1600	5-50	
50	VA30G-50	400-4000	12-120	7 Bar
		630-6300	20-200	
		1000-10000	30-300	
		4-16 m³/h	--	

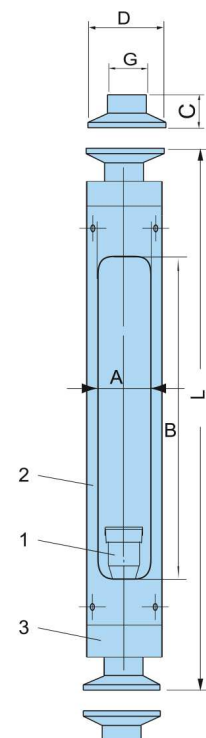

Dimension (mm)

DN (mm)	L	B	A	C	D	G	Weight (Kg)
15	370	270	25	21	51	19	1.6
25	368	236	40	21	51	25.4	4
40	378	226	50	21	64	45	6
50	378	226	60	21	77.5	51	9

Materials

NO.	Material
1	304SS, 316SS
2	304SS
3	304SS, 316SS