




Performance Feature


Diameter: DN25mm-DN150
Electrode: 316L, Hc, Ti, Ta, Pt
Liner: PTFE, PFA
Medium: conductivity liquids
Medium conductivity : $\geq 5\mu$ s/cm
Accuracy: $\pm 0.25\%RS, \pm 0.5\%RS, \pm 1.0\%RS$
Velocity of flow: 0.1m/s-10m/s
Working temperature: $-25^{\circ}C \sim 150^{\circ}C$
Working pressure: 1.0MPa
Related converter type: MF710/MF720/MF730/MF750/MF760
Connection standard: DIN
Output: 4-20mA/ frequency/pulse
Power supply: 85~265VAC (50HZ or 60HZ) / 24VDC
Installation type: compact, remote

MF710
External dimensions(mm)

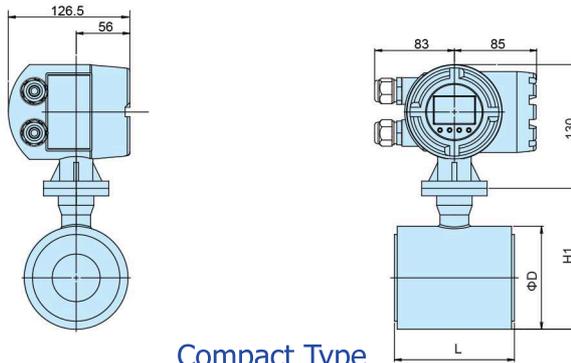


Compact Type

MF720
External dimensions(mm)

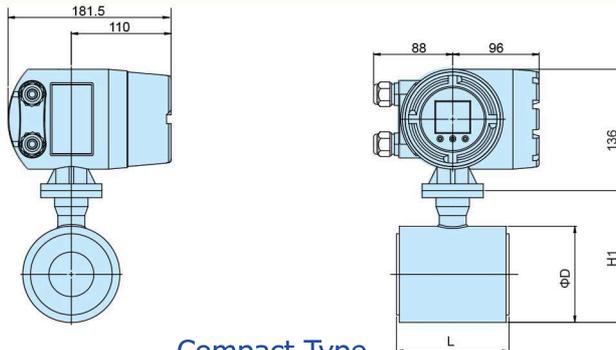

Compact Type

MF730
External dimensions(mm)

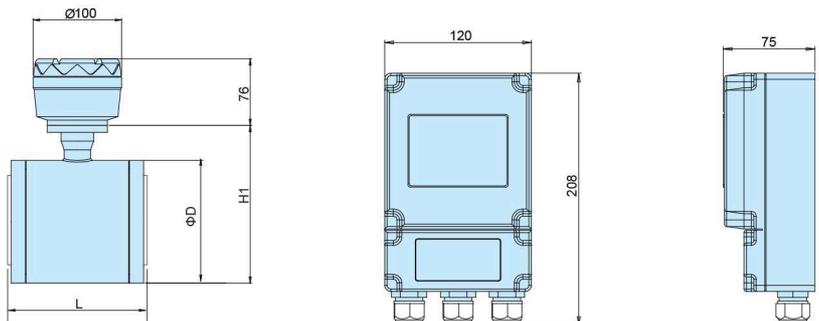


Remote Type

JA Series

Electromagnetic Flowmeter Sensors

JA External Dimensions			Unit: mm
DN	L	D	H1
25	90	72	112
32	90	82	122
40	90	92	132
50	125	108	148
65	125	128	168
80	130	142	182
100	160	162	202
125	170	192	232
150	185	219	259

KF700-JA How to order

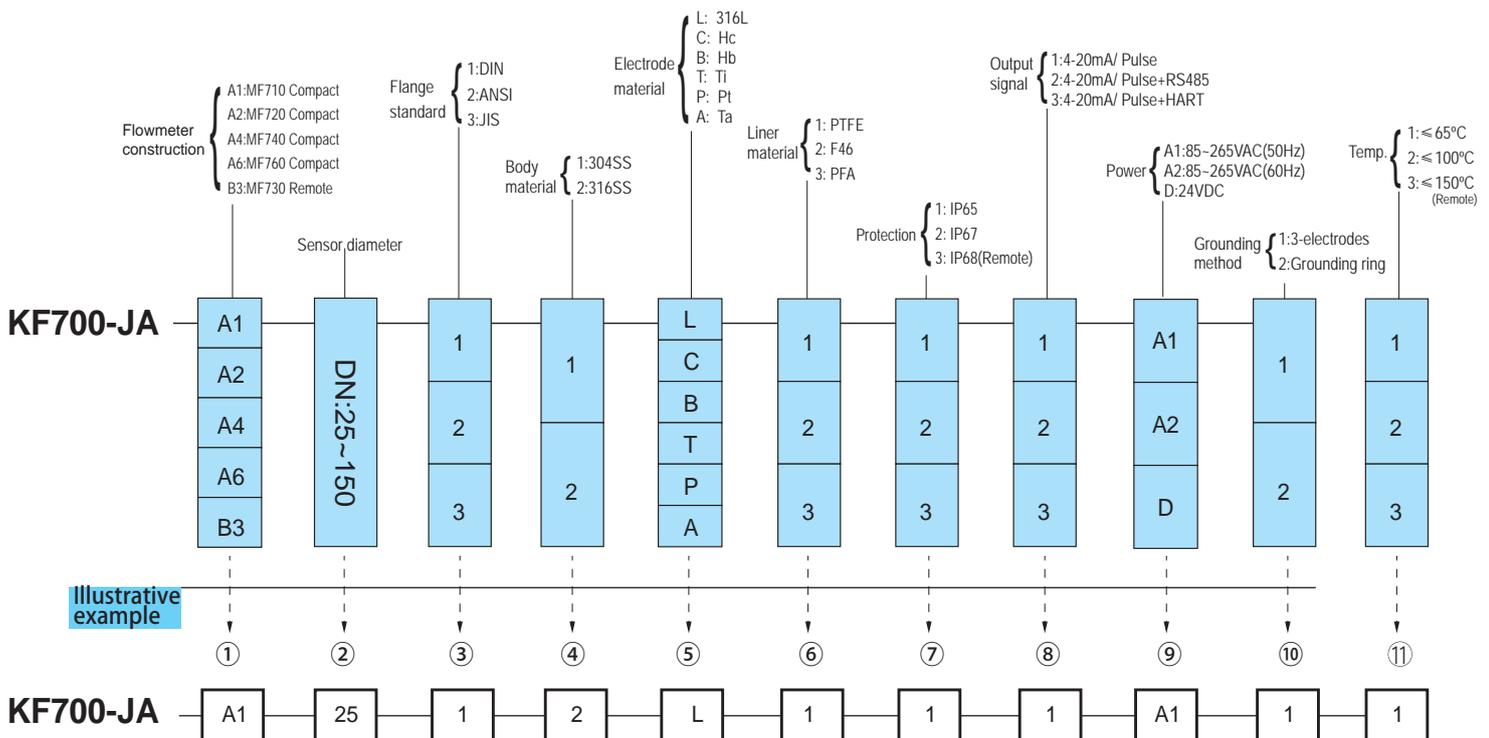

* Remark: For remote type, please specify the cable length(Standard is 8M).