





### Performance Feature

Diameter: DN25~DN150
Electrodes: 316L, Hb, Hc, Ti, Ta, Pt
Liner: PBT
Medium: conductivity liquids
Medium Diameter: $\geq 20\mu\text{s/cm}$
Accuracy: $\pm 0.5\% \text{RS}$ , $\pm 1.0\% \text{RS}$
Converter Model: MF710 / MF730 / MF750 / MF760
Velocity of flow: 0.1m/s -10m/s
Working temp.: $-25^{\circ}\text{C} \sim +100^{\circ}\text{C}$
Working pressure: 1.0MPa
Output Signal: 4 ~ 20mA、frequency
Power: 85~265VAC (50HZ or 60HZ) , 24VDC
Installation: compact, remote

### MF710




External dimensions(mm)

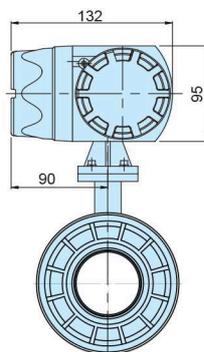

Compact Type

### MF730

External dimensions(mm)

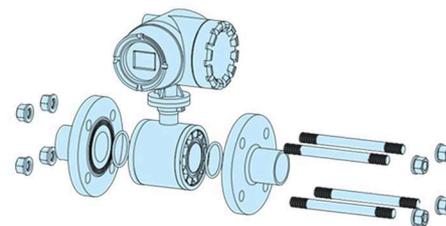

Remote Type