

MODEL 400BR Spinner type sight flow indicator

Features

- Glass dome self cleaning when rotating spinner keeps.
- Detected fluid flow from rotating of the spinner.
- Can be installation both horizontal / Vertical piping.

Specifications


Application		Cold and hot liquid
Maximum working pressure		7 Bar
Maximum working temperature		100°C
Maximum thermal shock		40°C
Process connection		JIS Rc Screwed
Material	Body / Cover	Cast bronze
	Glass Dome	Borosilicate Glass
	Spinner	Nylon



Min. and Max. working flow rate (Water)

Size	Min. flow rate (L/min)	Max. flow rate (L/min)
10A	0.8	8.3
15A	1.0	13
20A	1.5	18
25A	2.3	30

- The minimum flow rate is the valve required for spinner to start rotate.

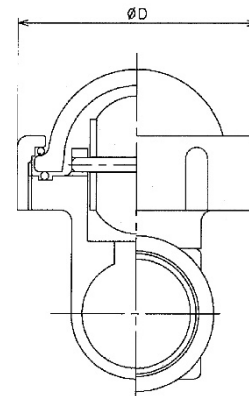

Dimensions (mm) and Weight (kg)

Size	L	H1	H2	D	Weight
10A	76	12	67	54	0.45
15A	76	14.5	69.5	54	0.50
20A	83	17	76	54	0.60
25A	89	21.5	93.5	66.5	0.95

Parts List & Material

No.	Description	Material
1	Body	Bronze
2	Cover	Brass
3	Glass Dome	Borosilicate Glass
4	O-Ring	NBR
5	Spinner	Nylon
6	Spindle	Stainless Steel

