



QTLD/M Mini Electromagnetic Flow Meter

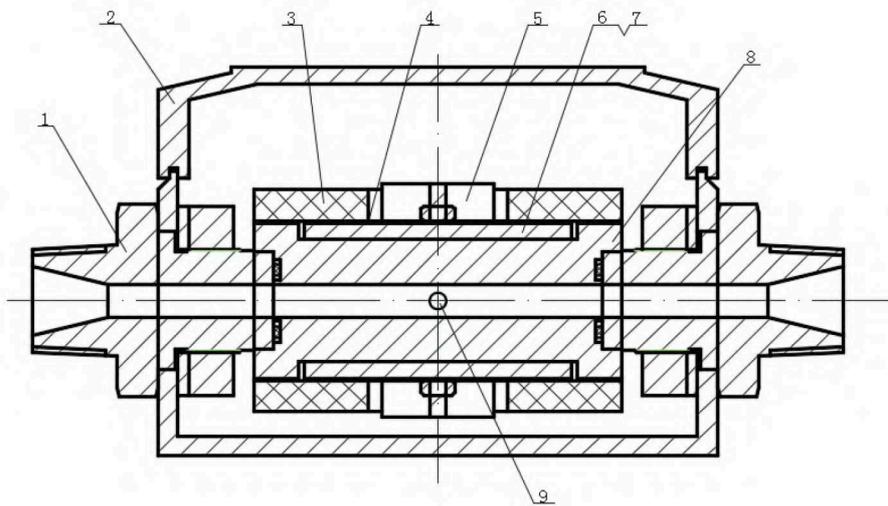

Dimension

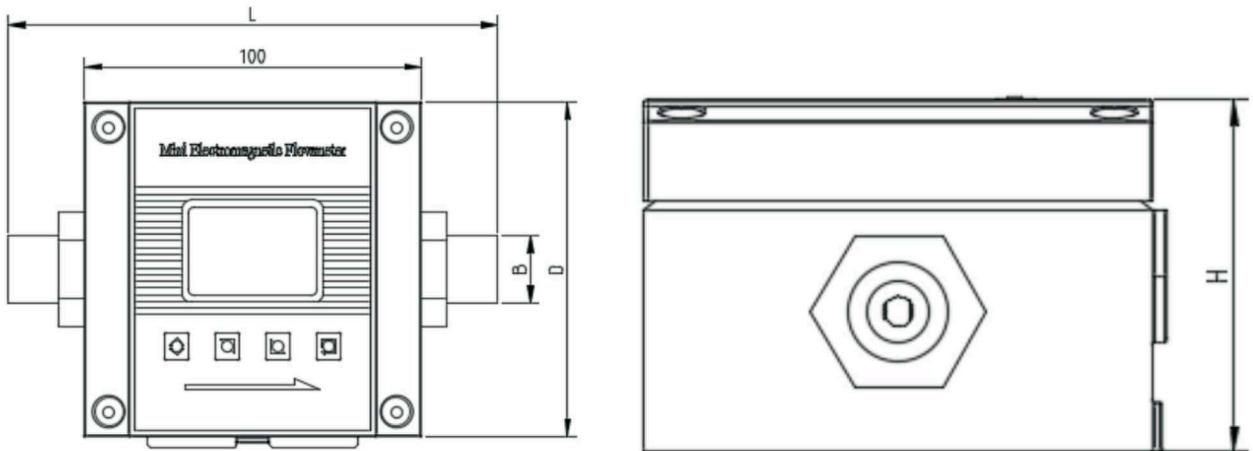

1. Connector
2. Shell
3. Excitation Coil
4. Pole Shoe
5. Magnet Yoke
6. Bracket Plate Assembly
7. Fixed Block
8. Measuring Tube
9. Electrode-assembly

Caliber		Nominal Pressure (Mpa)	Dimension			
mm	Inch		L(mm)	D(mm)	H(mm)	B(mm)
3	1/8"	1.6	135	100	70	G1/2"
6	1/4"		145			G1/2"
10	3/8"		145			G1/2"
15	1/2"		155			G1/2"

DN		Flow Range (L/min)		Male Thread
mm	Inch	Standard	Special	
3	1/8"	0.2~2	0.2~4	G1/2"
6	1/4"	0.8~8	0.8~16	G1/2"
10	3/8"	2~20	2~40	G1/2"
15	1/2"	5~50	5~100	G1/2"

Selection Table

QTLD/M		X	X	X	X	X
Size	DN3 (1/8")	1				
	DN6 (1/4")	2				
	DN10 (3/8")	3				
	DN15 (1/2")	4				
Process Connection	G1/2"		1			
	G3/8" (only for DN3 and DN6)		2			
	NPT 1/2"		3			
	NPT 3/8"		4			
	BSP 1/2"		5			
	BSP 3/8"		6			
	Others		7			
Electrode Material	SS316L			1		
	Hastelloy C			2		
	Titanium			3		
Power Supply	85~265 VAC				E	
	16~30 VDC				G	
Signal Output /Communication	4~20 mA + Pulse + RS485 MODBUS					A
	GPRS					D