


ULF



Ultra low flow sensors

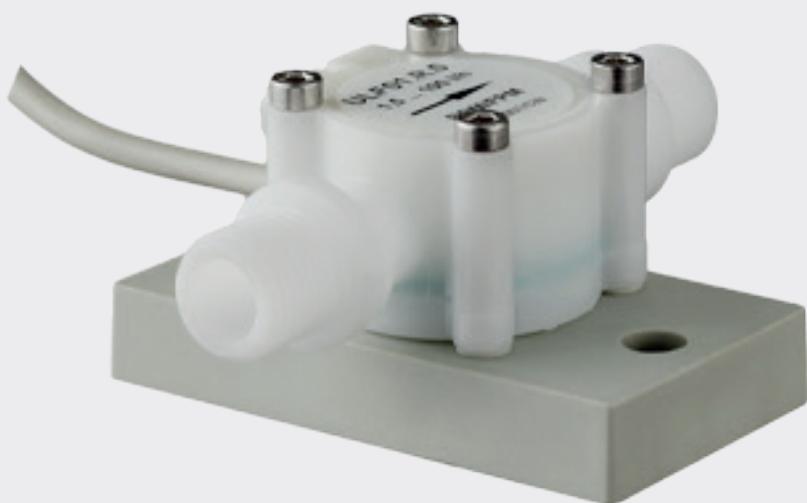

ULF

The FLS ULF, Ultra Low Flow sensor is a device designed for use with any type of aggressive, solid-free liquid. The sensor can be mounted on flexible or rigid pipes through connections with 1/4" GAS male thread. The paddlewheel sensor produces a frequency output proportional to the speed of the flow that can be transmitted and processed without difficulty. The ULF sensor offers two different flow ranges, starting from 1.5 l/h (0.0066 gpm). The construction materials, POM or ECTFE (Halar®), guarantee particularly high strength and chemical resistance.

ULTRA LOW FLOW SENSORS

APPLICATIONS

- Water treatment
- Chemical industry
- Pharmaceutical industry
- Batching systems
- Laboratory systems

MAIN CHARACTERISTICS

- Parts in contact with liquids in POM or ECTFE (Halar®)
- Two flow rate ranges available:
 - from 1.5 to 100 l/h (0.0066-0.44 gpm)
 - from 6 to 250 l/h (0.0264-1.1 gpm)
- High chemical resistance
- Easy mounting

TECHNICAL DATA

General information

Flow rate range:

- Model ULF01: from 1.5 to 100 l/h (0.0066-0.44 gpm)
- Model ULF03: from 6 to 250 l/h (0.0264-1.1 gpm)

Linearity:

±1% of full scale

Repeatability:

±0,5% of full scale

Operating temperature:

from -10°C to 80°C (from 14°F to 176°F)

Operating pressure:

max 5 bar (70 psi) at 22°C (72°F)

Fluid viscosity:

from 1 to 10 cST

Protection class:

IP65

Materials in contact with liquids (POM model):

- Sensor body: POM
- O-ring: FKM

- Rotor: POM

- Shaft: corepoint

- Magnets: SmCo₅

Materials in contact with liquids (ECTFE model):

- Sensor body: ECTFE (Halar®)
- O-ring FKM or KALREZ

- Rotor: ECTFE (Halar®)

- Shaft: Sapphire

- Bearings: Sapphire

Connections:

1/4"GAS male thread

Cable length:

standard 2 m (6.5ft)

Specific data for ULF01.H1 and ULF03.H

Supply voltage:

from 5 to 24 VDC ±10% regulated

Supply current:

< 15 mA at 24 VDC

Output signal:

Square wave

Signal type:

push-pull (for connection to NPN and PNP inputs)


K-Factor:

- Model ULF01: 8,431 pulses/litre (31,569 pulses/US gallon), linear range 8 to 100 l/h

- Model ULF03: 3,394 pulses/litre (12,846 pulses/US gallon), linear range 15 to 250 l/h


Specific data for ULF01.R1 and ULF03.R	Supply voltage: none Output signal: Square wave Output type: Reed contact K-Factor: - Model ULF01: 2,108 pulses/litre (7,978 pulses/US gallon), linear range 8 to 100 l/h - Model ULF03: 848 pulses/litre (3,210 pulses/US gallon), linear range 15 to 250 l/h
Standards & Approvals	Manufactured under ISO 9001 Manufactured under ISO 14001 CE RoHS Compliance EAC

PRESSURE DROP

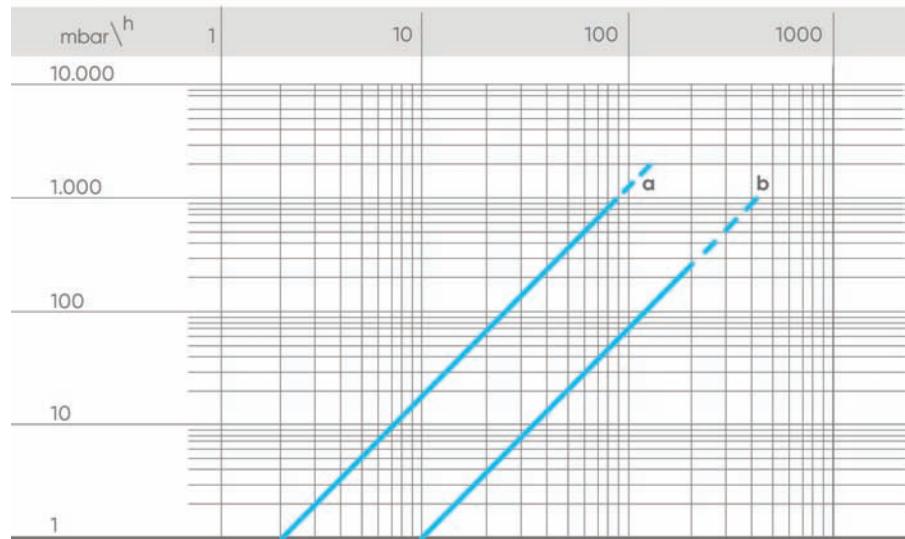


ULFXX.H SENSOR ELECTRICAL CONNECTIONS

	M9.50	M9.03 input 1	M9.03 input 2	M9.07	M9.08	M9.10
GND	30	30	16	16	16	37
FREQ	28	28	14	14	14	36
V+	27	27	13	13	13	35

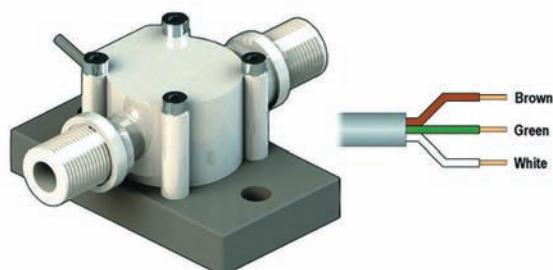

M9.02	
	SENSOR
5	GND
6	IN
7	V+

ULFXX.R SENSOR ELECTRICAL CONNECTIONS

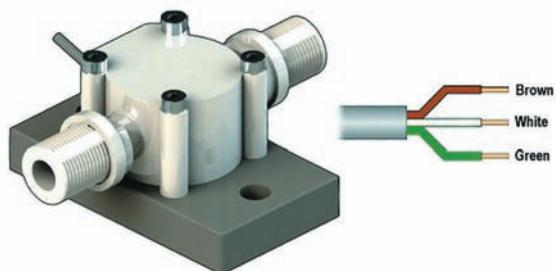

M9.20
M9.00

SENSOR	
7	GND
8	IN
9	V+

PRODUCT CODES



ULFOX.X.X


Ultra Low Flow Sensors

Code	Version	Power supply	Length	Main Wetted Materials	Enclosure	Flow Rate Range	Weight (gr.)
ULF01.H.0	Push-Pull	5 - 24 VDC	77 mm	POM FKM	IP65	From 1,5 to 100 l/h*	170
ULF01.H.2	Push-Pull	5 - 24 VDC	77 mm	ECTFE FKM	IP65	From 1,5 to 100 l/h*	200
ULF01.H.3	Push-Pull	5 - 24 VDC	77 mm	ECTFE KALREZ	IP65	From 1,5 to 100 l/h*	200
ULF01.R.0	Reed	None	77 mm	POM FKM	IP65	From 1,5 to 100 l/h*	170
ULF01.R.2	Reed	None	77 mm	ECTFE FKM	IP65	From 1,5 to 100 l/h*	200
ULF01.R.3	Reed	None	77 mm	ECTFE KALREZ	IP65	From 1,5 to 100 l/h*	200
ULF03.H.0	Push-Pull	5 - 24 VDC	77 mm	POM FKM	IP65	From 6 to 250 l/h**	170
ULF03.H.2	Push-Pull	5 - 24 VDC	77 mm	ECTFE FKM	IP65	From 6 to 250 l/h**	200
ULF03.H.3	Push-Pull	5 - 24 VDC	77 mm	ECTFE KALREZ	IP65	From 6 to 250 l/h**	200
ULF03.R.0	Reed	None	77 mm	POM FKM	IP65	From 6 to 250 l/h**	170
ULF03.R.2	Reed	None	77 mm	ECTFE FKM	IP65	From 6 to 250 l/h**	200
ULF03.R.3	Reed	None	77 mm	ECTFE KALREZ	IP65	From 6 to 250 l/h**	200

*(0,0066-0,44 gpm)

**(0,0264-1,1 gpm)

TECHNICAL DRAWINGS

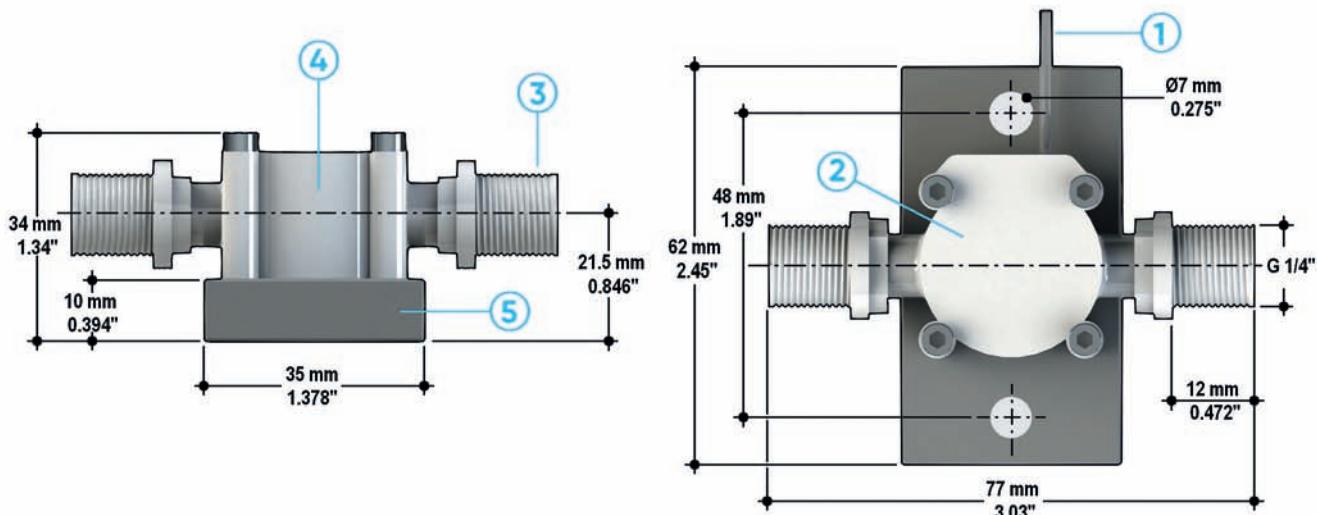

ULF

1 Electrical cable: standard 2m (6.5ft)
 2 Fully encapsulated electronics
 3 Connection to the process (other models are available on request depending on the body material)
 4 Sensor body in POM or ECTFE Halar® (registered trademark of Ausimont-Solvay)
 5 PP fixing plate