

## Specifications

**Accuracy :** ±2.5%

**Application :** Water / Air

**Tube material :** Glass

**Float material :** 304SS

**Guide rod material :** 304SS

**Housing Material :** Aluminium

**Seals:** VITON

**Working temperature :** -20°C - 120°C

**End Connection :** Screw, Socket, Flange


**End Connection Material :** 304SS

DN (mm)	Model	Water flow range (L/h)	Air flow range (Nm <sup>3</sup> /h)	Max. working pressure (Bar)
15	VA20S-15	4-40	0.12-1.2 0.3-3 0.5-5 0.8-8 1.2-12 2-20	10
		6-60		
		10-100		
		16-160		
		25-250		
		40-400		
		63-630		
25	VA20S-25	63-630	2-20	10
		100-1000	3-30	
		160-1600	5-50	
		250-2500	8-80	
40	VA20S-40	160-1600	5-50	9
		250-2500	8-80	
		400-4000	12-120	



## VA20S Dimensions (mm)

DN (mm)	Window size (axb)	L2	A	Screw connection		Weight (Kg)
				Standard	Option	
15	33x235	375	58	½" BSP	3/8" BSP	1
25	50x240	375	74	1" BSP	¾" BSP	1.8
40	65x235	375	92	1 ½" BSP	1" BSP	3.1

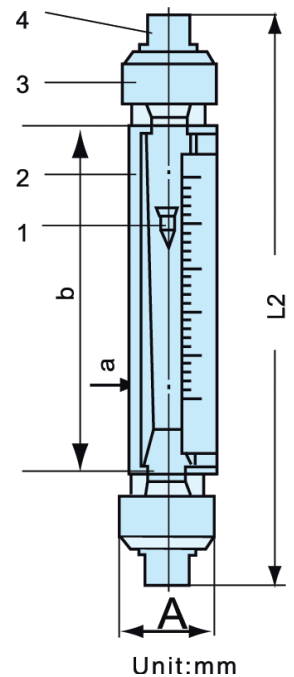

## VA20S Material

No.	Description	Material	
		Standard	Option
1	Float	304SS	-
2	Housing	Aluminium	-
3	Screw cap	Aluminium	-
4	Connection	304SS	UPVC

## Process Connection Style

Standard : 304SS Thread

Option : UPVC Socket / Thread

Option : UPVC Flange

