

Z-6000 / Z-6500 Series . . . Flowmeters

Specifications

Accuracy : ±6%

Tube : Polysulfone (PSU)

Installation : Any position

Option : Alarm switch

Pressure limit : 10 bar

Temperature limit : 100°C

Connection : Male or female thread

Connection Material : 304 Stainless steel

Z-6000 series standard

Model	Water flow range		Air flow range		Connection
	GPM	LPM	GPM	LPM	
Z-6011	0.5-5	2-20	18-180	60-600	½" NPT(F), ¾" NPT(M) ¾" NPT(F), 1" NPT(M) F : Female M : Male
Z-6012	1-7	3-25	20-200	70-700	
Z-6013	1-10	4-35	25-250	100-1000	
Z-6014	1-16	5-60	35-350	150-1400	
Z-6015	3-20	10-70	52-520	200-2000	¾" NPT(F), ¾" NPT(M) 1" NPT(M)
Z-6016	4-28	10-100	80-800	300-3000	



Z-6000 Series

Z-6000 series with alarm switch



Model	Water flow range		Air flow range		Connection
	GPM	LPM	GPM	LPM	
Z-6011A	0.5-7	2-25	18-180	60-600	½" NPT(F) ¾" NPT(M)
Z-6012A	0.5-9	2-35	20-200	70-700	
Z-6013A	1-13	3-50	25-250	100-1000	F : Female M : Male
Z-6014A	3-16	10-60	35-350	150-1400	
Z-6015A	4-22	15-80	52-520	200-2000	¾" NPT(F) 1" NPT(M)
Z-6016A	5-28	20-100	80-800	300-3000	




Z-6500 Series

Z-6500 series


Model	Water flow range		Connection
	GPM	LPM	
Z-6501	3-25	12-90	1½" NPT(F) 2" NPT (F) F : Female
Z-6502	5-50	20-200	
Z-6503	8-80	30-280	
Z-6504	10-100	40-380	

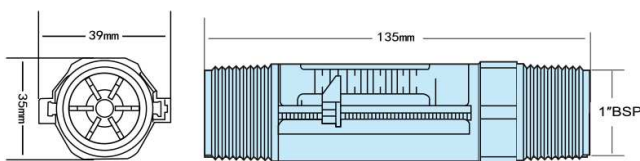

Z-6000 Standard

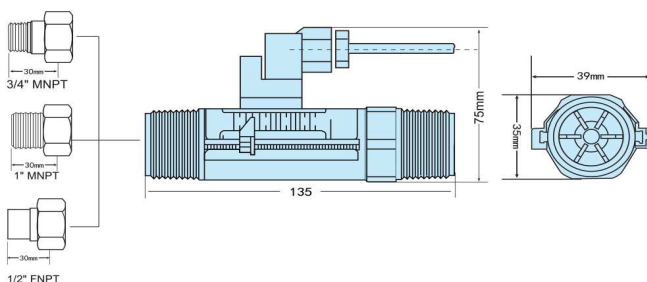

Z-6000 with Alarm Switch

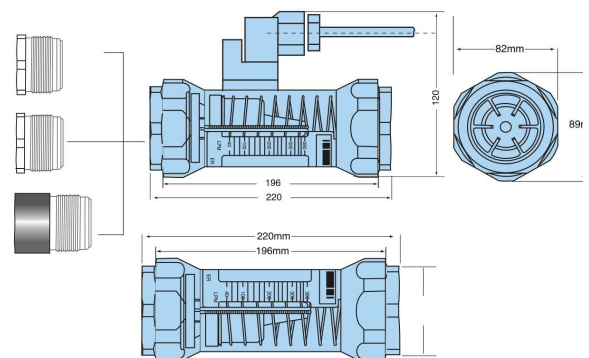

Z-6500 Series