


QES BATTERY

Powered by GSL

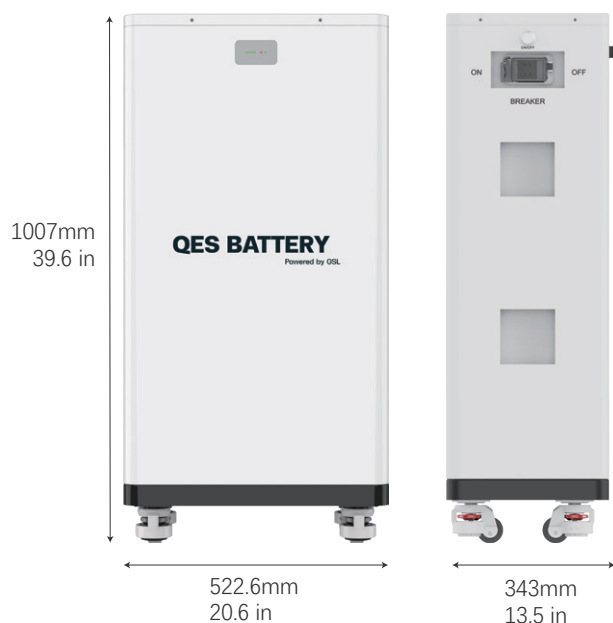

As the leading vertically integrated manufacturer of lithium iron phosphate battery systems, QES BATTERY has provided various battery solutions for nearly all kinds of ESS applications. Thanks to our self-developed core technology in cells/BMS/system design, QES BATTERY has delivered more than 138+ countries serving 100,000+ users.

✓ Long life and safety

Vertical industry integration ensures more than 8500 cycles with 80% DoD.
Safe Lithium iron phosphate battery cell.

✓ Intelligent

Each battery with independent BMS system manages power output smartly and effectively.

✓ Modularization

Modular design gives the end customers the power of choice of capacity. Deliver up to 241.2KWh with single max module (16.08KWh) at 15pcs parallel connection.

✓ Easy to install and use

Just plug and play to minimize the installation time and cost. Compact and fashionable design fits in your sweet home environment.

✓ Compatibility

Compatible with most of the available Hybrid inverters.

✓ Safety Cert

CB IEC62619, CE, UN38.3, MSDS

QES BATTERY

Powered by GSL

Battery Specifications

Model No	GSL-W-16K
Nominal Parameters	
Battery Chemistry	LiFePO4
Voltage	51.2V
Capacity	314Ah
Energy	16.08kWh
Dimension (W/H/D)	540*1006*500mm / 20.6*39.6*13.5 in
Weight Approximate	145.5kgs / 320 lbs
Basic Parameters	
Warranty Period [3]	5 years
Cycle Life (25±2°C,0.5C/0.5C,80%EOL)	≥8500
Storage Time / Temperature	5 months @ 25°C; 3 months @ 35°C; 1 month @ 45°C
Operation Temperature	-20°C to 60°C @ 60+/-25% Relative Humidity
Storage Temperature	0°C to 45°C @ 60+/-25% Relative Humidity
Communication Port	CAN2.0, RS485, WiFi
Certification	CB IEC62619, CE, UN38.3, MSDS
IP Rating of Enclosur	IP65
Electrical Parameters	
Operation Voltage	46-56Vdc
Max. Charging Voltage	56Vdc
Max. Charging Current	150A
Max. Discharging Current	150A
Max Power	7680W

QES BATTERY

Powered by GSL

Aerosol Fire Extinguishing Device

Model No QRR0.01GW/S-BZ001

Nominal Parameters

Net Weight (per unit)	55g ± 10g
Dimensions	49.2mm ±1mm*47.7mm ±1mm*20mm ±1mm
Operating Temperature Range	-50℃ to +90℃
Operating Relative Humidity	≤ 95% RH
Activation Method	Thermal Activation
Discharge Time	≤ 6 seconds
Thermal Activation Temperature	185℃ ±10℃
Surface Temperature (Casing)	≤ 200℃
Protected Space/Volume	≤ 0.3 m³
Oxidizer Name & Content	Potassium Nitrate, Strontium Nitrate (50% - 58%)
Service Life	10 Years

