



Line Interactive UPS with Stabilizer



Microprocessor Control
Digitalizing internal system process for increasing efficiency and Responsiveness.



Boost/Buck Voltage Stabilizer
Adjusting low/high voltage to safe level so that consumers can work indefinitely during brownouts.





Intelligent Battery Management
Three-stage charging to shorten recharge time and battery temperature compensation to extend the battery life.



Cold-start Function
Turning on the UPS without connecting the utility.

- Auto restart while AC recovering
- Off-mode charging
- Simulated sine wave

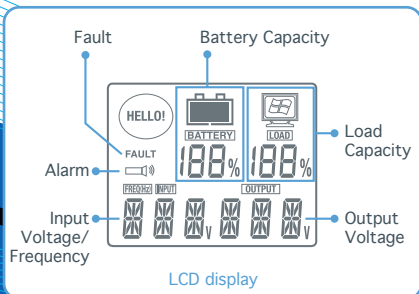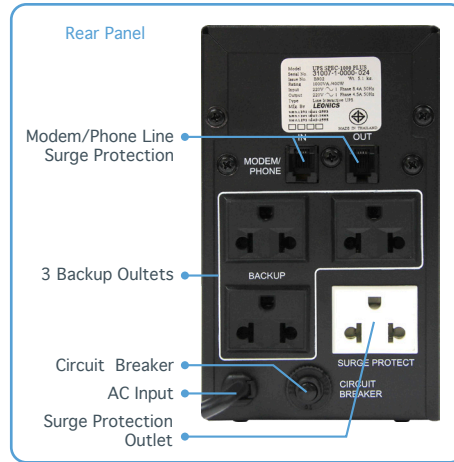

SPEC-1000 Plus

Protect your data loss
Protect your computer



TIS 1291 Part 1-2553 (2010)
TIS 1291 Part 2-2553 (2010)
TIS 1291 Part 3-2553 (2012)



Line Interactive UPS with Stabilizer

MODEL	SPEC-1000 Plus		
CAPACITY	1000 VA / 400 W		
SYSTEM	UPS system	Line interactive UPS with stabilizer	
	Control system	Microprocessor control	
	Stabilizer function	Buck / Boost	
LOAD APPLICATION	The number of PC*	1 set + printer**	
INPUT	Input voltage	220 Vac ± 25%	
	Frequency	50 Hz ± 10%	
OUTPUT	Voltage battery mode	220 Vac	
	Voltage AC mode	220 Vac ± 10%	
BATTERY	Type / Capacity	Sealed lead acid (maintenance free) / 12 V 7 Ah	
	Backup time	10 - 30 min. (depending on connected load)	
	Continuous recharging time	8 hours (90% after full discharged)	
PROTECTION	Over voltage	Mains to UPS backup 220 Vac + 25%	
	Under voltage	Mains to UPS backup 220 Vac - 25%	
	Transfer time	2 - 7 msec typical, 10 msec maximum	
	Overload (AC / DC mode)	yes	
	Output short circuit	yes	
	Surge energy dissipation	312 Joules / 2 msec	
	Power dissipation	1,000,000 W within 100 microsec.	
	Acoustic noise	less than 45 dBA at 1 metre	
	OUTPUT OUTLET	Number of backup outlet	3
		Number of surge protection outlet (not backup)	1
FEATURES	AC / DC start	yes	
	Surge protection for telephone line	yes	
	Surge protection for laser printer	yes	
	Auto restart function	yes	
	Off mode charging	yes	
INDICATOR	LCD	Input (voltage, frequency), Output voltage Battery capacity, Load capacity, Fault, Alarm	
AUDIBLE ALARM (BUZZER)	Battery mode	Audible beep every 6 seconds	
	Overload	Audible beep 2 seconds and stop every 0.5 seconds	
	Low battery	Audible beep every 2 seconds	
	Battery runs out of energy	Continuous audible beep	
ENVIRONMENT	Temperature	0 - 40°C	
	Humidity	0 - 90% (non-condensing)	
CONFORMANCE	Design regulation	EMC category C2	
DIMENSIONS	W x H x D (mm.)	95 x 160 x 320	
WEIGHT	Approximate in kg.	5.1 kg	

PC* = Computer with 17" LED monitor, Printer** = Bubble jet or Dot Matrix printer only.
Continuous product development is our commitment. In that manner, the above specifications may be change without prior notice.

LEO POWER SUPPLY CO.,LTD.

27, 4th Floor, Soi Bangna-Trad 34, Bangna Tai, Bangna, Bangkok 10260
Phone 0-2746-9500 Fax 0-2746-8712 E-mail: marketing@lpsups.com