


**UNDER-THE-TABLE WARMER**

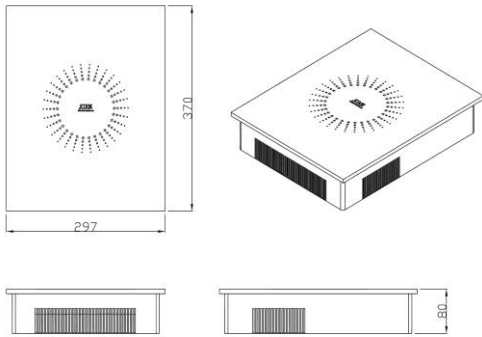

\* Metal Body Casing/EMC

< Control Box >

DESCRIPTION	
MODEL	JNU04
Electric requirements	200-240V, 50-60Hz, 1PH
Max Output	400 W
Amperage	2A
Control Steps	warming : 7 steps
Dimension (mm)	Product: 297*370*80 (mm), Package:350*505*165(mm)
Weight (kg)	Product:5kg Package:6kg
Control Type	Separated panel with encoder/ button
Product Type	Built-In
Min. Cookware Diameter	MIN : Ø 120 mm
Max Weight	MAX 30 Kg
Function	<ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> <b>Safety Function</b></li> <li>- Prevent overcurrent : Error E1</li> <li>- Prevent over voltage : Error E2 ( Above 260V )</li> <li>- Prevent low voltage : Error E3 ( Under 170V )</li> <li>- Prevent over heating product inside : Error E4 (Above 85C, product inside)</li> <li>- Prevent over heating product surface (Prevent overheated empty cookware) : Error E6 ( Above 260C )</li> <li><input checked="" type="checkbox"/> <b>Timer Function</b></li> <li>- Set timer from 1sec to 720min, by 1sec</li> <li>- Once set, same timer setting is applied (reset by pushing power button)</li> <li><input checked="" type="checkbox"/> <b>Warming Mode : H1~H7 ( 1 liter water standard )</b></li> <li><input checked="" type="checkbox"/> <b>Jumping height : 40mm from the glass surface</b></li> </ul>

Warranty 1-year Parts and Labor, exclusive breakage of glass or malfunctions caused by user's fault.

**IMPLEMENTATION**

