

### UNDERCOUNTER UNIT

SUR-GN1-1400-2D



*Sanwich preparation unit with  
flexible configuration.*

## SUR GN1-SERIES

### Sandwich Preparation Refrigerator Unit


#### STANDARD FEATURES

Insulation	High structural strength Polyurethane Foamed-in-place insulation.
Finish	Tough, hygienic construction, exterior bodies are stainless steel 430 no.4 finish. Door frame and mullion are of 430 grade stainless steel for magnetic gaskets. Interior is stainless steel 304 2B finish. Zincalume steel top, base and back.
Body & Door	Doors are self closing with easy replaceable magnetic gaskets. Integrated Stainless steel handle. Flexible configuration, models available with doors and drawers compatible for GN pan size.
Refrigerator system	Self-contained, refrigeration system mounted on single chassis, easily removable for service. Condensate drain use recycled heat to evaporate drain water, economical and convenient with no drain line required. Optional remote condensing unit. Multi-ventilation with forced cool air to minimize ventilation restriction.
Controller	Microprocessor controlled with digital display.
Optional Extra*	<ul style="list-style-type: none"> <li>- Cutting board</li> <li>- Stainless steel wire shelf.</li> <li>- Stainless steel base and back.</li> <li>- Different types of splashback.</li> <li>- Locking plate or cylinder locks.</li> <li>- 2 or 3 drawers (suit GN pan size) in place of S/S door.</li> <li>- Stainless steel work top.</li> <li>- Marble or granite top.</li> <li>- Swivel castors.</li> <li>- Remote condensing unit.</li> <li>- GN 1/6 pan.</li> </ul>


#### TECHNICAL DATA

#### REFRIGERATED MODELS


MODEL NUMBER	SUR-GN1-950	SUR-GN1-1400	SUR-GN1-1850
Dimension L x D x H (mm.)	950 x 750 x 850	1400 x 750 x 850	1850 x 750 x 850
Capacity ( ltr.)	159	329	485
Temperature range		2 °C to 5 °C	
Refrigerant		R 134 a	
Compressor (Hp.)	1/4	1/3	1/3
PVC coated wire shelves	2 (GN 1/1)	4 (GN 1/1)	6 (GN 1/1)
Pan (Optional)	4 - GN 1/6 x 100 mm	6 - GN 1/6 x 100 mm.	12 - GN 1/6 - 100 mm.
Power supply	220-240 V / 50 Hz / 1 Ph. (60 Hz models are available)		




FRONT VIEW  
SUR-GN1-950

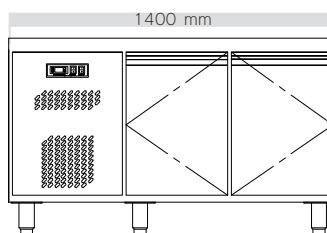


FRONT VIEW  
SUR-GN1-1400

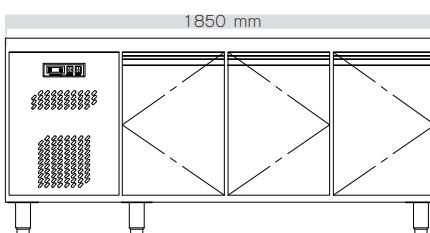


FRONT VIEW  
SUR-GN1-1850




SECTION SIDE VIEW



SECTION TOP VIEW

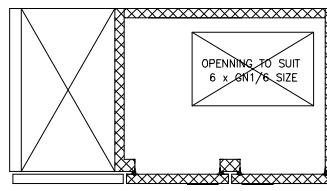

SECTION TOP VIEW

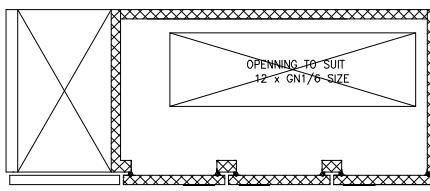

SECTION TOP VIEW