

[UPRIGHT UNIT]

V.2

R-SERIES

Reach-in refrigerator / freezer

R46-4d
with optional cylinder locks




All time favourite model
which becomes industry standard.


STANDARD FEATURES

| | | |
|----------------------------|--|--|
| Insulation | High structural strength Polyurethane Foamed-in-place. | |
| Finish | Tough, hygienic construction, exterior bodies are stainless steel 304 no.4 finish. Door frame and mullion are of 430 grade stainless steel for magnetic gaskets. Interior is stainless steel 304 2B finish. Zinalume steel top, base and back. | |
| Door | Choice of full or half Stainless Steel doors. Available with double pane 3 mm. heat reflective insulated glass. Self closing door with easily replaceable magnetic gasket. Mullion heater standard for freezer units but option for refrigerator. Integrated Stainless steel handle. | |
| Refrigerator system | Self-contained, easily removable, top mounted condensing unit. Fitted with condensate evaporator, no drain connection required. | |
| Controller | Multi-function microprocessor controlled with digital thermometer display. | |
| Refrigerant | * R134a for chiller | * R404a for freezer |
| Shelves / GN pan | Complete with 4 pcs. PVC coated wire shelves per full door. Stainless steel angle slide, suit GN 2/1 pan size. | |
| Other features | Coved stainless steel floor pan. Interior light. Heavy duty, adjustable, stainless steel bullet feet. Left hinge or right hinge selectable. | |
| Optional extra | <ul style="list-style-type: none"> Stainless steel wire shelves. Stainless steel base and back. Mullion heater for refrigerator. Double pane heat reflective glass door. | <ul style="list-style-type: none"> Remote condensing unit. Locking plate or cylinder locks. Swivel castors. |


| TECHNICAL DATA | Refrigerated models | | | Freezer models | | |
|----------------------------------|---|-------------------|-------------------|------------------|-------------------|-------------------|
| Model number | R21 | R46 | R72 | F21 | F46 | F72 |
| Dimension - L x D x H (mm.) | 680 x 810 x 2095 | 1320 x 810 x 2095 | 1975 x 810 x 2095 | 680 x 810 x 2095 | 1320 x 810 x 2095 | 1975 x 810 x 2095 |
| Capacity Cu.Ft / Litres | 20/566 | 43/1220 | 66/1870 | 20/566 | 43/1220 | 66/1870 |
| Temperature range | 2 °C to 5 °C | | | -18 °C to -20 °C | | |
| Cooling capacity (Btu.) | 1355 | 2671 | 3845 | 1720 | 3241 | 4586 |
| Compressor (Hp.) | 1/3 | 1/2 | 5/8 | 3/4 | 1 | 2 |
| Shelves | 4 (GN2/1) | 8 (GN2/1) | 12 (GN2/1) | 4 (GN2/1) | 8 (GN2/1) | 12 (GN2/1) |
| Mullion heater (full/half doors) | 53 | 53 x 2 | 40 x 3 | 82 | 82 x 2 | 80 x 3 |
| Defrosting system | Circulated air | | | Electric | | |
| Power supply | 220-240 V / 50 Hz / 1 Ph. (60 Hz models are available.) | | | | | |




R21 / F21

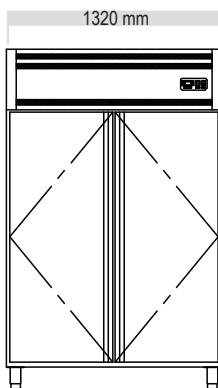

R46 / F46

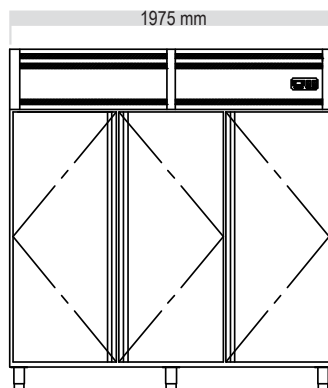

R72 / F72

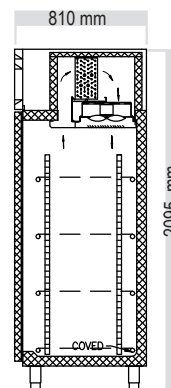

CROSS SECTION

