

AC 206

Self Contained Ice Machine 130 kg

Item #:
Project:
Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine maintenance visible alarm light on front pane
- Ergonomically designed ice-storage access, with disappearing door. Door-closing movement dampening system.



AC L 206
Large Gourmet 39 g
Ø 38 x H 41 mm



AC M 206
Medium Gourmet 20 g
Ø 30 x H 34 mm



AC S 206
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R452A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

50 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 130 kg

AC 206

Self Contained Ice Machine 130 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 130 kg

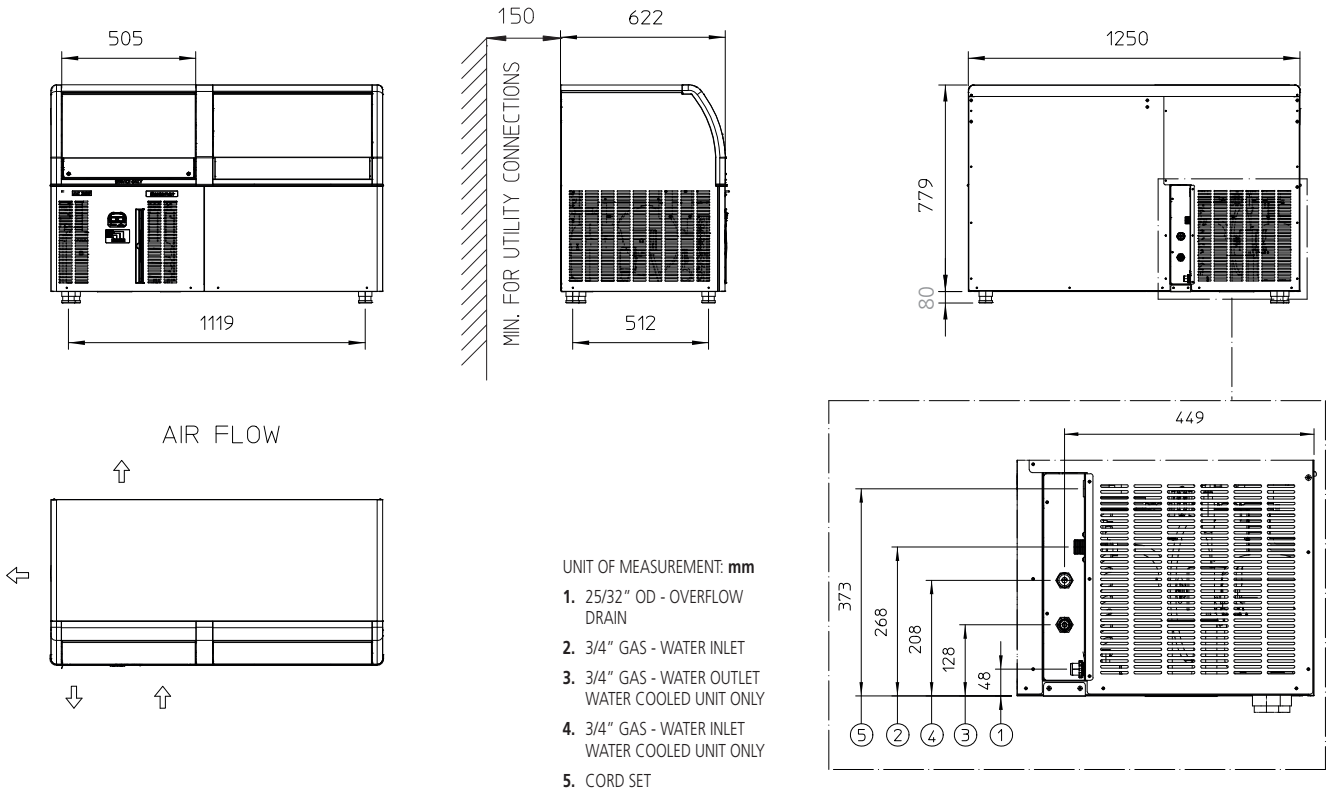

UNIT DATA		SHIPPING DATA	
Size (W x D x H)	1250 x 622 x 859 mm	Carton (W x D x H)	1320 x 690 x 960 mm
Net weight	82 kg	Weight	95 kg

Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
ACL 206 AS	230/50/1	126	117	92	21.6	20.5	9.6	950	2100	3 x 1.5	16
ACL 206 WS	230/50/1	126	124	112	15.4	17.2	115.8	700	2100	3 x 1.5	16
ACM 206 AS	230/50/1	130	123	91	19.9	18.1	10.8	850	1770	3 x 1.5	10
ACM 206 WS	230/50/1	128	126	108	14.9	16.1	81.3	760	1770	3 x 1.5	10
ACS 206 AS	230/50/1	100	93	72	29.8	21.3	7.5	950	2100	3 x 1.5	16
ACS 206 WS	230/50/1	100	93	72	29.8	21.3	81.3	950	2100	3 x 1.5	16
ACM 206 AS	230/60/1	141	136	112	19.6	22.0	12.0	1000	2050	3 x 1.5	16
ACL 206 AS	230/60/1	130	122	100	22.0	22.0	14.0	950	2043	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions