

## *Easy-Balancer*<sup>®</sup>



**Complete portable vibration analyser including:**

- User interface in several languages**
- All measurements with 2 transducers simultaneously**
- Balancing in 1-2 planes with polar diagrams**
- Frequency Analysis with transfer to PC**
- Coast Down for tracking resonances**
- Vibration shape for machine animation**
- Total vibration level according to ISO standards**
- Bearing Condition measurement**
- Output to printer and computer**
- Transducers (2) and phase sensor**

# Balancing and Vibshape

## Balancing

### Large speed range

Balancing can be made between 30 to 192.000 rpm corresponding to the frequency range 0,5 to 3.200 Hz.

### Two transducers simultaneously

Easy Balancer measures with two transducers simultaneously which makes dynamic balancing very simple.

### Starts and saves automatically

Easy Balancer both starts and finishes the measurements with trial- and balancing weights automatically.

A measurement starts automatically when the selected balancing RPM has been obtained and finishes automatically when the measurements are stable.

### Balancing according to ISO-Standards

Easy Balancer compares the balancing result according to ISO Standard. This makes it possible to balance any machine, even on site, according to ISO Standard without the need for a balancing machine.

### Weight distribution to fixed positions

Easy Balancer can distribute the balancing weight to fixed positions e.g. to bolts in a coupling or blades in a fan.

### Weight calculations to new radius

With Easy Balancer you can at any time choose a new radius for the balancing weight and the instrument calculates a new balancing weight to the chosen radius.

### Alarm at the most common faults

Easy Balancer controls the progress of the balancing and gives an alarm if the operator makes a common fault like for example leaves the trial weight in the machine when he has told the instrument to remove it.

**With Easy Balancer balancing has become very "easy".**

**Balancing functions**

- Calculation of trial weight
- Weight distribution
- Balance q
- Response
- View resp
- Bias vibra

12.314  
145.0  
Mp2

17.521  
208.0  
Mp2

6.6894  
19.2  
Mp1

Trial weight is too big in plane 1

**Calculation of trial weight**

**Input of response matrix**

**Balance quality**

**Saved balancings**

**LATEST BALANCING**

FAN 7422  
FAN H20

97 07 21

CENTRIFUG PM7 STORA

## Vibshape

Easy Balancer is creating a list of several measurements where the level, phase and speed are stored.

Easy Balancer can also measure a multiple of the speed and two transducers can be used simultaneously.

Easy Balancer can store thousands of measurements in different lists.

The Vibshape function is used for example when we want to animate (create a moving picture of) the machine or when we want to measure several measuring points, for example a large steam turbine with many bearings.

Vibshape			
Multiple A: 2		Multiple B: 7	
Mp	Vib	Angle	Speed
001	um		Hz
001	437.28	142.9	49.5
001	98.342	311.6	148.5
002	374.48	218.1	49.5
003	mm/s		RPM
003	12.578	78.7	5940
003	4.8235	192.2	20790
004	mm/s		Hz
004	7.4312	4.7	24.5
005			

# Frequency analysis, coast down and overall values

## Frequency analysis


Easy Balancer makes a frequency analysis with two transducers simultaneously between the frequency range 2 to 3.200Hz and with a resolution of 1Hz that corresponds to 3.200 lines.

When analysing with only one transducer the resolution is 0,5Hz that corresponds to 6.400 lines.

As a help when analysing a spectra Easy Balancer has simple, harmonic and side band cursors.

You can easily zoom in the frequency range with the numeric keys 1 to 6.

With key 6 the spectra is displayed with full resolution.

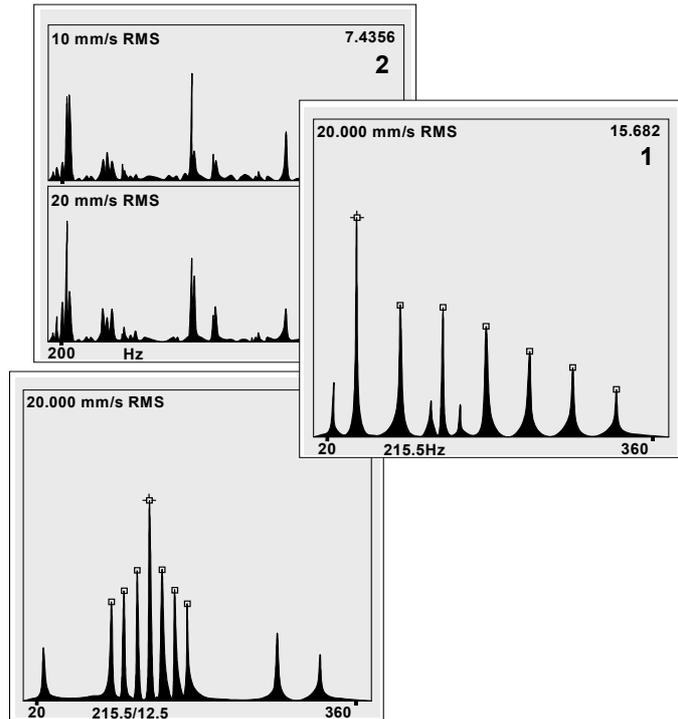


## Coast down

With Easy Balancer you can easily make a Coast-down to investigate the resonance properties in a machine.

You speed up the machine to maximum RPM, start the measurement and turn off the machine.

Easy Balancer automatically distributes the RPM range in 167 parts and measures the level and phase at every division of the RPM.

Easy Balancer measures coast-down with two transducers simultaneously.

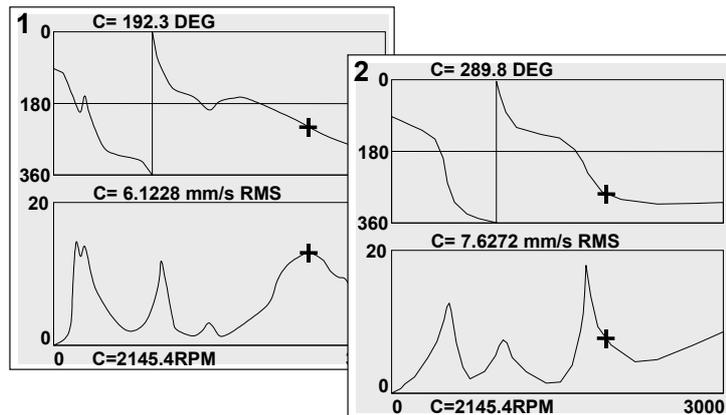


## Total level and Bearing condition

Easy Balancer can measure total level and bearing condition like a voltmeter.


The level is displayed both as a numeric value and as a bar scale.

This makes it easy to investigate how the machines is vibrating in different directions and in different measuring points and also how the machine reacts when a bearing is lubricated or when the tension in a transmission-belt is changed.

### Total level

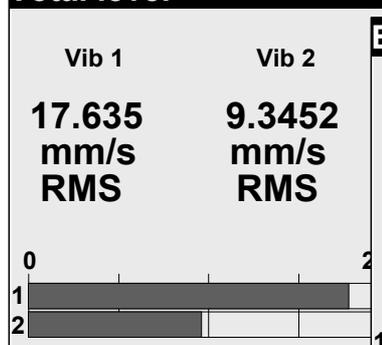

### Bearing condition

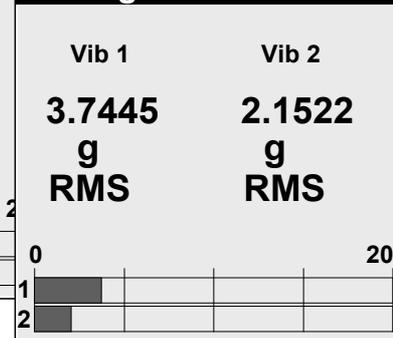

# Technical Specification

## ◆ Transducer:

Easy Balancer is prepared for the most common types of transducers like Accelerometers, Velocity Transducers and Proximity Probes. Both the transducer inputs can supply 4mA to accelerometers with built in constant current amplifiers and also supply 24VDC/25mA to inductive proximity probes. The nonlinearity of velocity transducers are compensated in the software. Easy Balancer can be pre-programmed for up to 10 different types of transducers. You choose a unit and enter the sensitivity of the transducer in mV/unit. The maximum input without external resistors is 5.0V. Each channel can be programmed independently.

A separate input for RPM transducers has can supply 24V/25mA to optical or inductive RPM transducers. The input accepts both PNP and NPN transducers and also Namur transducer for 8.8V. This input can also be used together with magnetic RPM transducers. In this case the instrument supplies a current of 2.4mA through the transducer coil.

With special self-adjusting electronics Easy Balancer accepts all RPM pulses between 0.5 and 24Volt, even negative, as long as one pulse per turn is dominating the RPM signal.

## ◆ Display units:

Each channel can independently be programmed to show vibrations in the 10 most common vibration units and with rms, peak or peak-peak. Frequency can be shown in rpm or Hz.

## ◆ Balancing:

Digital tracking filter which is controlled by RPM pulse. A vibration noise which has the same level as the unbalance, influences the measurement less than 1%. With averaging which normally is used in balancing, this influence decreases even more. Balancing can be made between the frequency range 0,5 to 3.200Hz which corresponds to the RPM range 30 to 192.000.

## ◆ Frequency analysis:

Easy Balancer makes a frequency analysis between the frequency range 2 to 3.200Hz. When measuring with 2 transducers simultaneously the resolution is 1Hz or 3.200 lines. When measuring with one transducer the resolution is 0,5Hz or 6.400 lines.

## ◆ Coast down:

Digital tracking filter which is controlled by RPM pulse. A vibration noise which has the same level as the unbalance, influence the measurement less than 3% at 1000Hz. The run-out can be made between the frequency range 0,5 to 3.200Hz which corresponds the RPM range 30 to 192.000. The resolution is always 1/167 part of the selected maximum RPM.

## ◆ Total level:

Total level is measured between 10 to 3.200Hz.  
The accuracy at the calibration frequency 200Hz is better than 3%.

## ◆ Bearing Condition:

The bearing condition value is an average of acceleration between 3.200 to 20.000Hz and is always displayed in the unit "g".

## ◆ Storage capacity:

1.7Mb or 65 high resolution spectra. Instead of each spectrum, 7 Balancings or 4 Coast Downs can be stored.

## ◆ Dimensions in mm:

Instrument dimensions 175 x 185 x 45 mm, weight 1.2 kg including alkaline batteries.

## ◆ A complete instrument set contains:

1 pc Instrument incl. batteries	2 pc Vibration Transducers with magnet support
1 pc Optical RPM transducer	2 pc Extension cable 5m for vibration transducers
1 pc Reflective tape 1m	1 pc Manual
1 pc Magnet support for the optical RPM transducer	1 pc Battery eliminator
1 pc Extension cable 5m for the optical RPM transducer	1 pc Extension tip and 1 communication cable for PC
1 pc Storing case in ABS plastic with space for documents, long cables or printer	



We reserve the right to make changes in this technical specification at any time without prior notice.

VIBRO CONTROLS B.V.  
Harmanshoeve 5  
NL 2935 AT Ouderkerk a/d IJssel

Telefoon: +31(0)180 684521  
Telefax: +31(0)180 684695  
Website: [www.vibro.nl](http://www.vibro.nl)

Rabobank rek. 3338.02.659  
BTW no. NL 8132.74.734 B01  
HR KvK Rotterdam 24361334