



TAKARA BANGKOK CO.,LTD.

Company Profile

TAKARAINC (Japan) Profile

Company: TAKARAINC CO., LTD.

Establish: June in 1956

Address: 1-4-8, Kitakyuhojimachi, Chuo-ku,
Osaka city, Osaka, 541-0057

Capital: 300 Million yen

Fiscal Year: 31-May

Employee: 102 persons

(31-May in 2022)



Takara BKK Profile

Company: TAKARA BANGKOK CO., LTD.

Establish: May 2nd in 2012

Address: 23/37 Sorachai Building 15F,
Sukhumvit 63, Klongtan-Nua,
Wattana, Bangkok, 10110

Capital: 2 Million Baht

Fiscal Year: 31-May

Employee: 5 persons

(31-May in 2022)



Company Concept

「技術で高機能を創造する」

**“To make high functions of
Materials function with Technology”**

Feature

1. Coating and Laminating technology
2. Trading Function
3. Knowledge of Materials
(Film, Liner, Paper...etc)

Our Products (Release Liner)

Base : Paper = Glassine, Kraft, Wood-Free...etc

Film = PET, BOPP, PE...Etc

Application : Label, Foam,
Adhesive Sheet,
Processing...etc



| |
|------------|
| Silicone |
| Base Paper |


| |
|--------------|
| Silicone |
| Polyethylene |
| Base Paper |

| |
|--------------|
| Silicone |
| Polyethylene |
| Base Paper |
| Polyethylene |

| |
|--------------|
| Silicone |
| Polyethylene |
| Base Paper |
| Polyethylene |
| Silicone |

Our Products (Paper)

PPC Paper

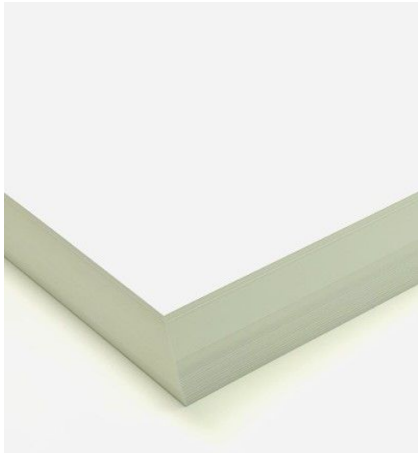

Kraft Paper




Washi

(Japanese Traditional Paper)



Glassine Paper

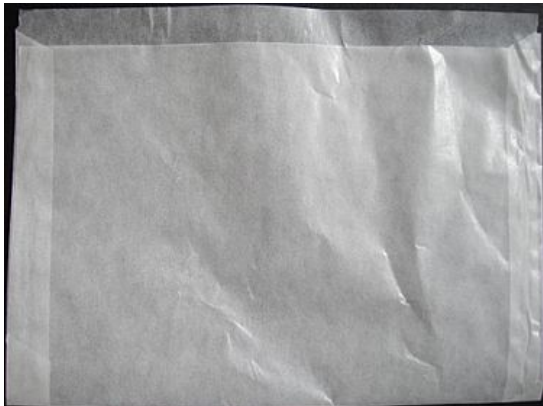

Thin Paper




Our Products (Film)

BOPP

(Biaxially-oriented polypropylene film)

PET

(Polyester film)

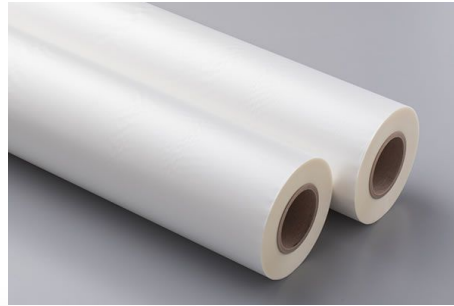


PE

(Polyethylene film)

PVC

(Polyvinyl chloride film)

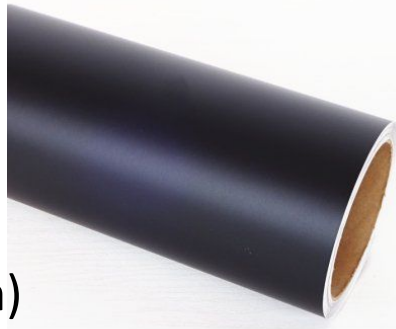

PI

(Polyimide film)



PC

(Polycarbonate Film)

Our Products (Tape)

- **Single-sided adhesive tape**
- **Double-sided adhesive tape**

Base: PET, OPP, PE, Foam

Adhesive: Acrylic, Silicone, Rubber

Application: Construction, Package,
Steel, Label...etc




Processing (Japan Factory)

Dry Lamination: Laminate Films with Adhesive

Structure

| |
|----------|
| Film |
| Adhesive |
| Film |

Process Image

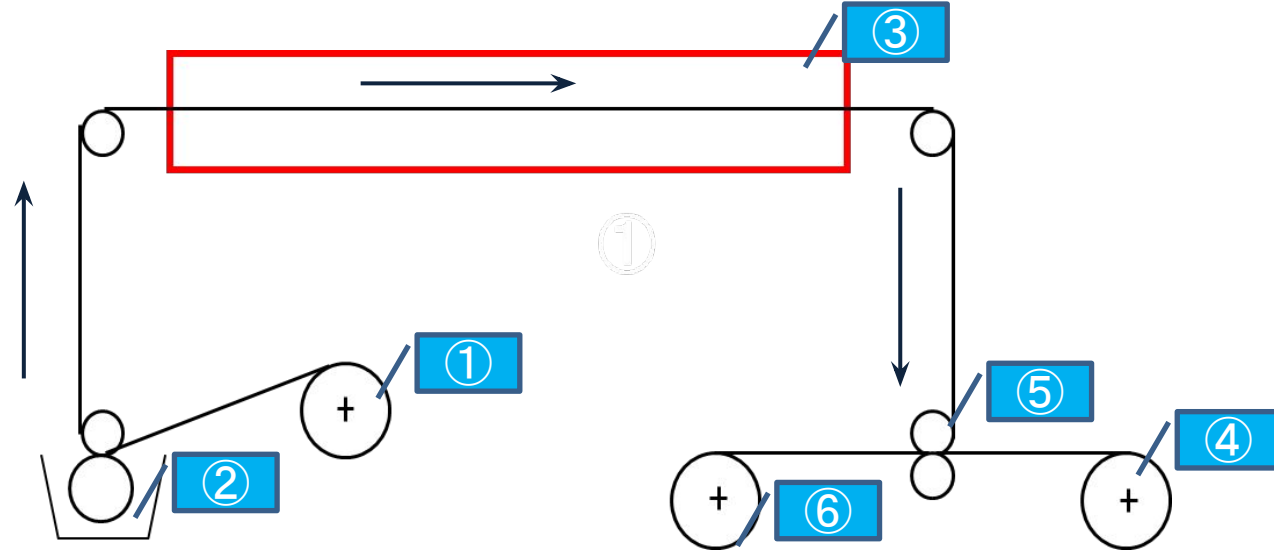


- ① Material : A
- ② Coat part
- ③ Drying zone

- ④ Material : B
- ⑤ Laminate part
- ⑥ Product winding




Processing (Japan Factory)

▪ Adhesive Coating

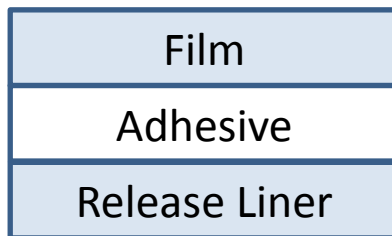


Adhesive: Acrylic, Silicone,
Urethane...etc

▪ Surface Coating

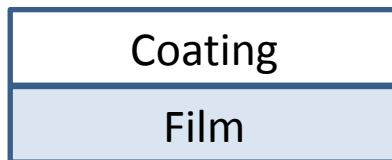

Coating: Anti-Statics, Matt, Release,
Black, Easy Adhesion....etc

▪ Slitting

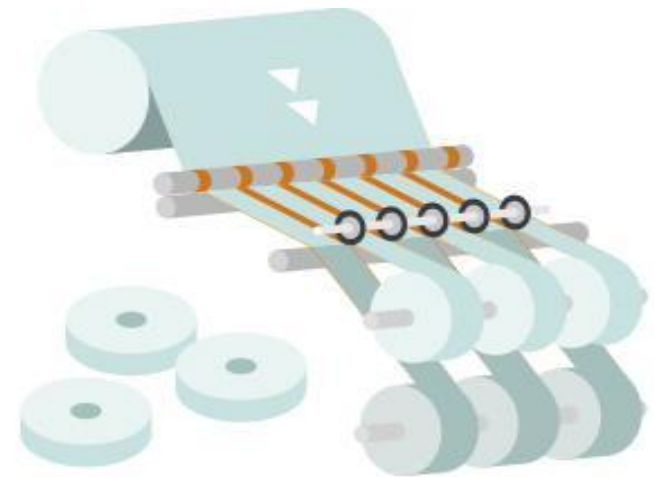

Maximum Slit Size: 1,300mm

Processing (Japan Factory)

Machine Spec

| No. | Name | Environment | Coating Method | Maximum Width | PSA Thickness | Dry temp |
|-----|------------------------------------|--------------|----------------|---------------|------------------|----------|
| 1 | Coating Machine (Dry Laminator) | Normal | gravure | -1700mm | 4-60μm | 200°C |
| 2 | Coating Machine (Dry Laminator) | Normal | Top Feed | -1250mm | 2-1,000μm | 200°C |
| | | | Gravure | -1700mm | 4~60g/m2 | |
| 3 | Coating Machine (Dry Laminator) | Class 10,000 | Top Feed | -1350mm | 2-1,000μm | 250°C |
| | | | Gravure | -1350mm | 5~20g/m2 15~80μm | |

| No. | Name | Environment | Maximum Width | Laminate Temp |
|-----|----------------|-------------|---------------|---------------|
| 4 | Heat Laminator | Normal | -1250mm | 150°C |