

PRODUCT BROCHURE

SMART PRODUCTS THRU SMART SOLUTIONS


THAM RICH
THAM RICH CORPORATION CO., LTD.

MATERIAL HANDLING & INDUSTRIAL EQUIPMENT



**Forklifts, Scissor Lifts, Warehouse Equipments
Your Integrated Logistics Solution Provider**

WWW.LOGISTICSMART.CO.TH

PT15 / SPT15 / EPT15W

- > AC drive unit with high stability
- > AC drive unit with optional rubber driver wheel
- > AC drive unit with optional 85Ah VRLA-AGM battery



1500 Kg

PTE18L

- > Easy entry and exit to pallets
- > Optional Maintenance-free 160Ah battery
- > Optional built-in charger



1800 Kg

PTE20X

- > Unique 36V system
- > 3x12V/85Ah Maintenance-free battery
- > Optional Built-in Charger
- > Side way battery replacement



2000 Kg

PS05F

- > Self-lift Stack (or "Flying" Stacker)
- > Can lift itself safely without a load on its forks
- > 12V/42Ah maintenance-free battery



500 Kg 0.8 / 1.3 M

PT25L

- > High performance German Vertical AC drive unit
- > European top brand key components
- > Standard side battery exchange



2500 Kg

PT20I / PT20D

- > Double lifting with initial lift to 800mm or mast lift to 1600 / 2000 / 2500mm
- > Optional 160Ah battery (for PT20I) or 210Ah battery (for sideways replacement)
- > Optional side-control buttons for order picking



2000 Kg 0.8 / 1.6 / 2.0 / 2.5 M

PS12L / PS16L

- > High performance German Vertical AC drive unit
- > European top brand key components
- > Standard Proportional lifting and lowering for accurate control
- > PS16L Optional straddle-leg type



1200 / 1600 Kg
1.6 / 2.9 / 3.2 / 3.6 / 4.3 / 4.6 / 5.3 M

PT20

- > Noblelift high quality AC drive unit
- > Ride-on foldable platform for long distance application
- > CAN-BUS technology for easy operation and service
- > Optional electric power steering (EPS)



2000 Kg

PSE10M

- > Mono-mast design with great view
- > Compact design, AC drive unit
- > Universal for low duty applications, optional straddle-leg type



1000 Kg 1.6 / 2.0 M

PSB12 / 15 / PS16W

- > Noblelift powerful AC drive unit
- > Optional ride-on foldable platform
- > Triplex mast for PS B15 with extremely low overall height for combined space
- > High stability and excellent view for PS16W



1200 / 1500 / 1600 Kg
1.6 / 2.9 / 3.2 / 3.6 / 2.9 / 3.4 / 4.6 M

PT27/36R

- > High performance German Vertical drive unit with high speed
- > European top brand key components
- > High capacity with high speed for extra large warehouse transports



2700 / 3600 Kg
11 / 14 9.5 / 12 (Km / h)

OPL25

- > High performance German AC drive motor
- > Standard electric power steering (EPS, Zapi)
- > Standard sideways battery replacement



2500 Kg 9.0 / 12.0 (Km / h)



Camel Series

Walkie, Rideon-or Sit-on
Tow Tractors

RACKS AND SHELVES

การจัดเก็บสินค้าและวัตถุดิบมักจะสร้างความยุ่งยาก เสียเวลา และเสียพื้นที่ เราสามารถจัดการปัญหาเหล่านี้ได้โดยเริ่มจากการสำรวจพื้นที่อย่างเป็นระบบ โดยทีมวิศวกรและผู้เชี่ยวชาญ แล้วนำข้อมูลมาวิเคราะห์ เพื่อออกแบบการจัดการคลังสินค้า โดยเลือกใช้เทคโนโลยีการจัดการคลังสินค้าที่เหมาะสมกับลูกค้ามากที่สุด เพื่อลดต้นทุนในการจัดเก็บ และ เพิ่มประสิทธิภาพในการบริหารจัดการคลังสินค้า

SMART PRODUCT THRU SOLUTION

ครบเครื่อง.. เรื่องคลังสินค้า



SELECTIVE RACKING



DRIVE IN RACKING



SHUTTLE CAR PALLET RACKING



AS/RS RACKING



MOBILE RACKING



MOBILE SHELVING



MICRO RACK / SHELVE RACK



MEZZANINE FLOOR



MULTI-TIER SHELVING



CANTILEVER RACK



FIFO RACK



FLOW RACK



PUSH BACK RACK

POST GUARD

BEST SOLUTION

The optimum solution to prevent accidents

Easy to install and Easy to disassemble

Affordable Price and Best Efficiency

Make innovative logistics system


SPECIFICATION

RAW MATERIAL PROPERTIES

Normal condition Temperature	-20° C to 35 °C
Melting point	85° C
Chemical hazard	None
Acute toxicity	None
Bending elasticity (ASTM D790)	93 Mpa
Hardness (ASTM D2240)	45 D scale

CHARACTERISTICS

1. Superb convenience since settled with Velcro type
2. Easy to install on its own and to move location without separate installation such as anchor
3. Superb protection due to excellent shock absorption and malleability
4. Able to use in warehouse for refrigeration and freezing (-20° C to 35° C)

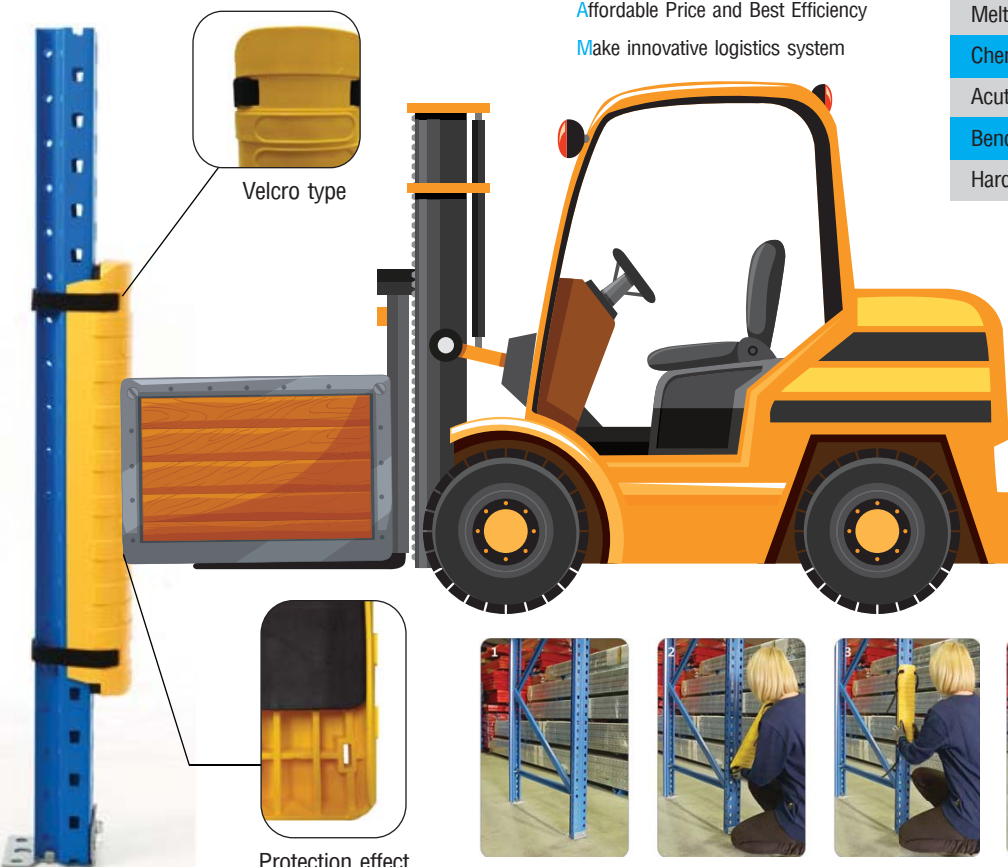

LUS

20mm pallet
of the straddle

5RM)

PS15CB

- > Walkie counter-balanced design for various stacking operations
- > Standard electric power steering (EPS) and sideways battery replacement



1500 kg
1.6 / 1.8 / 3.0 / 3.6 / 4.5 M

RT15 / 20 / 25ST

- > Standard electric power steering (EPS) and sideways battery replacement
- > Optional sideshift for tight space stacking



1500 / 2000 / 2500 kg
From 2.5 m to 8 m

RT14 / 16 / 20 / 20H

- > Maximum lift height up to 12.5m (RT20H)
- > Standard electric power steering (EPS) and sideways battery replacement
- > Optional sideshift for tight space stacking



1400 / 1600 / 2000 kg
From 2.5 m to 12.5 m

FE3D N Series

- > Compact design with small turning radius
- > Double drive for excellent acceleration
- > Ergonomic design for comfortable operation



1600 / 1800 / 2000 Kg

FE4P N Series

- > Dynamic, elegant & ergonomic design
- > High efficiency and low-energy consumption
- > Optional side-openable construction for easy battery replacement



1600 / 1800 Kg



2000 / 2500 / 3000 / 3500 Kg

DUNNAGE AIRBAG

ถุงลมกันกระแทก



SQUARE BAG




VINYL DUNNAGE BAG



PAPER DUNNAGE BAG



PP DUNNAGE BAG

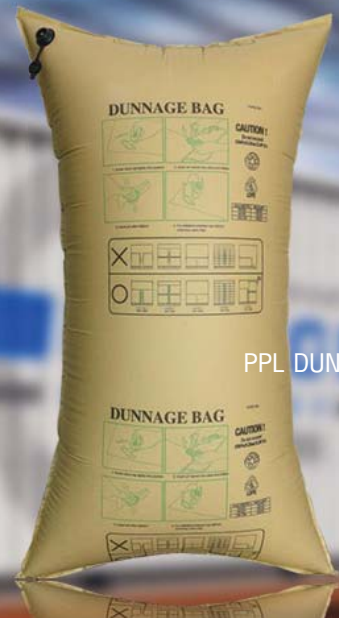

PPL DUNNAGE BAG