


## MD 80 4a

1-Phase 230 V 50 Hz

Duty Type : S1  
 Degree of protection : IP 55 ( TEFC )  
 Insulation class : F ( 155 °C )  
 Temp rise : Class B ( 80K )  
 Mounting Design : B3

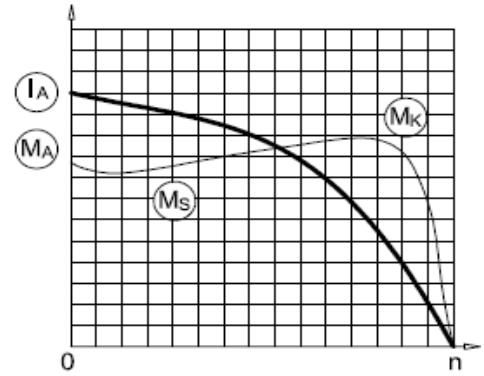

## ELECTRICAL DESIGN

Rated output (kW) : 0.55  
 Speed (rpm) : 1410  
 Rated current (A) : 3.3  
 Torque – Mn (Nm) : 3.73  
 Permanent Capacitor 400V (µF) : 20  
 Cos φ : 0.97  
 Efficiency % : 75.0  
 Moment of inertia J (kgm)<sup>2</sup> : 0.00092


Locked rotor Current – Ia (A) : 11.22  
 Ia / In : 3.4  
 Locked rotor Torque – Ma (Nm) : 1.90  
 Ma / Mn : 0.51  
 Breakdown Torque – Mk (Nm) : 6.3  
 Mk / Mn : 1.7

## MECHANICAL DESIGN

Frame : Aluminium  
 End shields : Aluminium  
 Cooling fan : Plastic  
 Terminal box : Plastic  
 Cable gland : Pg 16  
 No of cable glands : 1

### Bearing Arrangement

	Drive End	Non Drive End
Standard design	6204 ZZ	6204 ZZ
Paint	: RAL 7031- Grey	
Approximate weight (kg)	: 8.7	

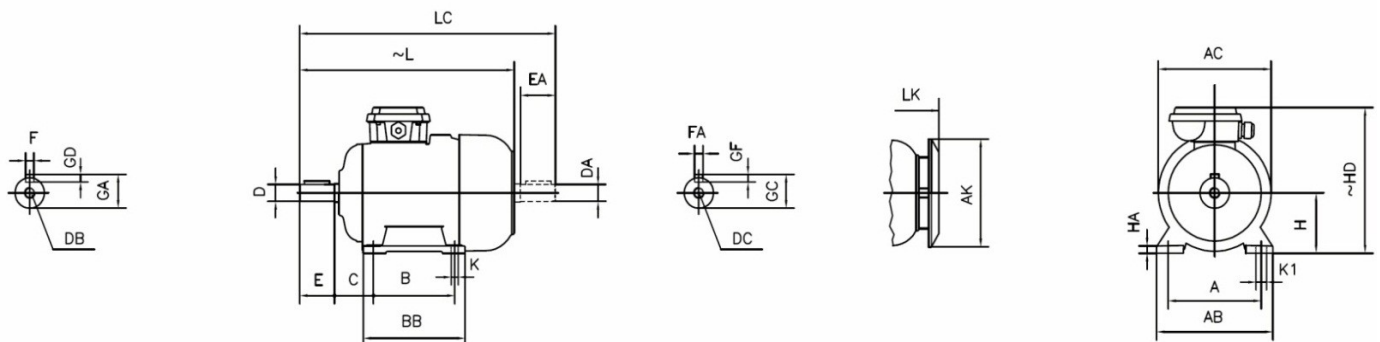

## DIMENSIONS

### FOOT MOUNTED MOTORS - B3, B6, B7, B8 B15, V5, V6

H	HD ~	HA	A	AB	AC Ø	AK Ø	K	K1	B	BB	L ~	LC	LK ~	C	E EA	DB DC	DØ DAØ	GA GC	FXGD FAXGF
80	212	10	125	160	156	150	10	15	100	125	278	323	308	50	40	M6	19	21.5	6X6