




MODEL : IS1012
SIZE : 1000 x 1200 x 135 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 1200 Kgs. STATIC LOAD MAX
: 750 Kgs. DYNAMIC LOAD MAX

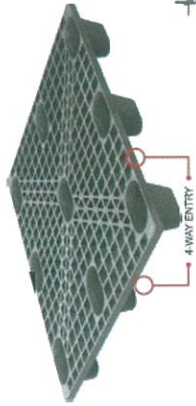

MODEL : IS1111
SIZE : 1100 x 1100 x 135 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 1200 Kgs. STATIC LOAD MAX
: 750 Kgs. DYNAMIC LOAD MAX

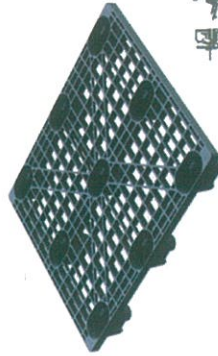

MODEL : IT1012
SIZE : 1000 x 1200 x 135 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 1000 Kgs. STATIC LOAD MAX
: 500 Kgs. DYNAMIC LOAD MAX

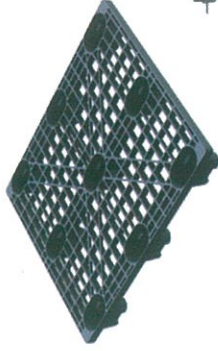


MODEL : IT1111
SIZE : 1100 x 1100 x 135 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 1000 Kgs. STATIC LOAD MAX
: 500 Kgs. DYNAMIC LOAD MAX



MODEL : LW1012 N
SIZE : 1000 x 1200 x 130 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 2000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX



MODEL : LW1111 N
SIZE : 1100 x 1100 x 130 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 2000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX



MODEL : LW0812
SIZE : 800 x 1200 x 130 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 2000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : NIS0813 UT
SIZE : 800 x 1300 x 130 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 2000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : NIS0912 UT
SIZE : 900 x 1200 x 130 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 2000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : NIS0913 UT
SIZE : 900 x 1300 x 130 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 2000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : NIS0813 UT
SIZE : 800 x 1300 x 130 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 2000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX

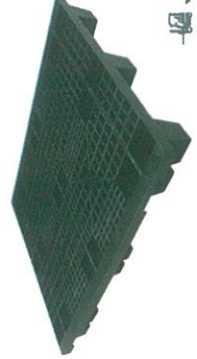


MODEL : NIS0912 UT
SIZE : 900 x 1200 x 130 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 2000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX



MODEL : NIS0913 UT
SIZE : 900 x 1300 x 130 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 2000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX



MODEL : CDA1111
SIZE : 1100 x 1100 x 130 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 3000 Kgs. STATIC LOAD MAX
: 1600 Kgs. DYNAMIC LOAD MAX



MODEL : CDA1114
SIZE : 1120 x 1420 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1350 Kgs. DYNAMIC LOAD MAX



MODEL : PMS0810 NR
SIZE : 800 x 1000 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1100 Kgs. DYNAMIC LOAD MAX







MODEL : PMS0810 RB
SIZE : 800 x 1000 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : SX1111
SIZE : 1100 x 1100 x 150 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : WL1010 NR
SIZE : 1000 x 1000 x 122 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 3000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : WL1012 NR
SIZE : 1000 x 1200 x 122 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 3000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : SJ1111
SIZE : 1100 x 1100 x 150 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX

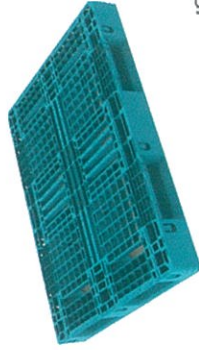


MODEL : TP21
SIZE : 1000 x 1340 x 135 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX



MODEL : WL1011 NR
SIZE : 1000 x 1100 x 122 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 3000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX



MODEL : WL1111 NR
SIZE : 1100 x 1100 x 122 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 3000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : WL1112 NR
SIZE : 1100 x 1200 x 122 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 3000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : WL1113 NR
SIZE : 1100 x 1300 x 140 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1650 Kgs. DYNAMIC LOAD MAX



MODEL : WML1012 NEO
SIZE : 1000 x 1200 x 150 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX



MODEL : WML1111 NEO
SIZE : 1100 x 1100 x 150 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX



MODEL : WL10812 NR
SIZE : 800 x 1200 x 140 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 3000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX



MODEL : WL1135 TY
SIZE : 1100 x 1350 x 140 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1650 Kgs. DYNAMIC LOAD MAX




MODEL : WML1013 NEO
SIZE : 1000 x 1300 x 150 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : WML1113 NEO
SIZE : 1100 x 1300 x 150 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX






MODEL : WMV1012 NEO
SIZE : 1000 x 1200 x 150 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : WMV1111 NEO
SIZE : 1100 x 1100 x 150 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : AD1111 LC
SIZE : 1100 x 1100 x 160 MM.
USAGE : DOUBLE FACE/4-WAY ENTRY
LOAD : 5000 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 900 Kgs. RACKING LOAD MAX




MODEL : BS0812 F
SIZE : 800 x 1200 x 170 MM.
USAGE : WINDOW CROSS/4-WAY ENTRY
LOAD : 4000 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 700 Kgs. RACKING LOAD MAX




MODEL : WMV1013 NEO
SIZE : 1000 x 1300 x 150 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX



MODEL : WMV1113 NEO
SIZE : 1100 x 1300 x 150 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX




MODEL : AE1111 LC
SIZE : 1100 x 1100 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 750 Kgs. RACKING LOAD MAX




MODEL : CDA1012
SIZE : 1000 x 1200 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4000 Kgs. STATIC LOAD MAX
: 1600 Kgs. DYNAMIC LOAD MAX
: 500 Kgs. RACKING LOAD MAX




MODEL : CPN120
SIZE : 1000 x 1200 x 160 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 750 Kgs. RACKING LOAD MAX




MODEL : EA1210
SIZE : 1000 x 1200 x 160 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX




MODEL : EMS0812 RB
SIZE : 800 x 1200 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 600 Kgs. RACKING LOAD MAX




MODEL : EMS1012 RB
SIZE : 1000 x 1200 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 600 Kgs. RACKING LOAD MAX




MODEL : CST012
SIZE : 1000 x 1200 x 150 MM.
USAGE : WINDOW CROSS/4-WAY ENTRY
LOAD : 4000 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 500 Kgs. RACKING LOAD MAX

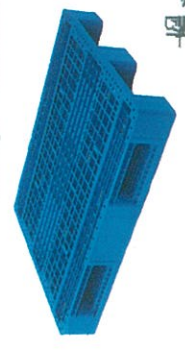

MODEL : EA1212
SIZE : 1200 x 1200 x 160 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX




MODEL : EMS1010 RB
SIZE : 1000 x 1000 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 600 Kgs. RACKING LOAD MAX



MODEL : EMS1212 RB
SIZE : 1200 x 1200 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 600 Kgs. RACKING LOAD MAX





MODEL : ES1012 LCB
SIZE : 1000 x 1200 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 850 Kgs. RACKING LOAD MAX



MODEL : ES1012 LCC
SIZE : 1000 x 1200 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 500 Kgs. RACKING LOAD MAX



MODEL : FA1210
SIZE : 1000 x 1200 x 150 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX



MODEL : FA1212
SIZE : 1200 x 1200 x 160 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4000 Kgs. STATIC LOAD MAX
: 1000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX



MODEL : FHS1010 RB
SIZE : 1000 x 1000 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX



MODEL : FHS1012 RB
SIZE : 1000 x 1200 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX



MODEL : FHS1111 RB
SIZE : 1100 x 1100 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX



MODEL : FHS1212 RB
SIZE : 1200 x 1200 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX




MODEL : JP110
SIZE : 1100 x 1100 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 750 Kgs. RACKING LOAD MAX



MODEL : MW1012 F
SIZE : 1000 x 1200 x 160 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 700 Kgs. RACKING LOAD MAX



MODEL : CP220 N
SIZE : 1000 x 1200 x 160 MM.
USAGE : DOUBLE FACE/4-WAY ENTRY
LOAD : 6000 Kgs. STATIC LOAD MAX
: 2000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX



MODEL : EHT012 RB
SIZE : 1000 x 1200 x 170 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 6000 Kgs. STATIC LOAD MAX
: 2000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX




MODEL : LPN 120
SIZE : 1000 x 1200 x 150 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 500 Kgs. RACKING LOAD MAX



MODEL : XP110
SIZE : 1100 x 1100 x 160 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 4500 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 750 Kgs. RACKING LOAD MAX



MODEL : CPW120 N
SIZE : 1000 x 1200 x 160 MM.
USAGE : WINDOW CROSS/4-WAY ENTRY
LOAD : 6000 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 750 Kgs. RACKING LOAD MAX




MODEL : EHT1212 RB
SIZE : 1200 x 1200 x 170 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 6000 Kgs. STATIC LOAD MAX
: 2000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX





MODEL : HP120
SIZE : 1000 x 1200 x 180 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 6000 Kgs. STATIC LOAD MAX
: 2000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX




MODEL : HPW120
SIZE : 1000 x 1200 x 180 MM.
USAGE : WINDOW CROSS/4-WAY ENTRY
LOAD : 6000 Kgs. STATIC LOAD MAX
: 2000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX




MODEL : JPW110
SIZE : 1100 x 1100 x 150 MM.
USAGE : WINDOW CROSS/4-WAY ENTRY
LOAD : 6000 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 750 Kgs. RACKING LOAD MAX



MODEL : KP220
SIZE : 1200 x 1200 x 180 MM.
USAGE : DOUBLE FACE/4-WAY ENTRY
LOAD : 8500 Kgs. STATIC LOAD MAX
: 2500 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX




MODEL : HP220
SIZE : 1000 x 1200 x 180 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 8000 Kgs. STATIC LOAD MAX
: 2500 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX




MODEL : JP220
SIZE : 1100 x 1100 x 150 MM.
USAGE : DOUBLE FACE/4-WAY ENTRY
LOAD : 6000 Kgs. STATIC LOAD MAX
: 2000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX




MODEL : KP120
SIZE : 1200 x 1200 x 180 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 6000 Kgs. STATIC LOAD MAX
: 2000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX



MODEL : KPW120
SIZE : 1200 x 1200 x 180 MM.
USAGE : WINDOW CROSS/4-WAY ENTRY
LOAD : 6000 Kgs. STATIC LOAD MAX
: 2000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX



MODEL : SP125
SIZE : 1130 x 1250 x 180 MM.
USAGE : SINGLE FACE/4-WAY ENTRY
LOAD : 8000 Kgs. STATIC LOAD MAX
: 2000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX



MODEL : SP225
SIZE : 1130 x 1250 x 180 MM.
USAGE : DOUBLE FACE/4-WAY ENTRY
LOAD : 8000 Kgs. STATIC LOAD MAX
: 2000 Kgs. DYNAMIC LOAD MAX
: 1000 Kgs. RACKING LOAD MAX



MODEL : WMV1012 NR
SIZE : 1000 x 1200 x 160 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 5000 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 850 Kgs. RACKING LOAD MAX



MODEL : WMV1112 NR
SIZE : 1000 x 1100 x 160 MM.
USAGE : DOUBLE DECK/4-WAY ENTRY
LOAD : 5000 Kgs. STATIC LOAD MAX
: 1500 Kgs. DYNAMIC LOAD MAX
: 850 Kgs. RACKING LOAD MAX

MODEL : KNOCK DOWN (MADE TO ORDER)

