



出色 · 源于对品质的专注
EXCELLENCE · COMES FROM THE FOCUS ON QUALITY

PCB板专用烤箱
Special oven for PCB board

高尔夫球头专用烤箱
Special oven for golf head

无尘精密烤箱
Dust free precision oven

真空/充氮烤箱
Dust free precision oven

高温烤箱
High temperature oven

高低温试验烤箱
High and low temperature test oven

红外线隧道炉
Infrared tunnel furnace

高精度隧道炉
High precision tunnel furnace

非标自动化设备
Non standard automation equipment

无尘精密隧道炉
Dust free precision tunnel furnace

东莞市新远大机械设备有限公司

地址：广东省东莞市樟木头镇莞樟东路523号

电话：0769-8118 3556

手机：139 2295 4170 谢先生

QQ：578051748

邮箱：xiexiaolongsl@163.com

网址：www.dgxyd777.com

DONGGUAN XINYUANDA MECHANICAL EQUIPMENT CO., LTD

Address: 523 Guanzhang East Road, Zhangmutou town, Dongguan City, Guangdong Province

Tel: 0769-8118 3556

Mobile: 139 2295 4170 Mr. Xie

Q Q: 578051748

E-mail: xiexiaolongsl@163.com

Web: www.dgxyd777.com



出色 · 源于对品质的专注
EXCELLENCE · COMES FROM THE FOCUS ON QUALITY

Integrity management 诚信经营

Customer first 客户至上

Service oriented 服务为本



新远大机械设备

NEW YUANDA MECHANICAL
EQUIPMENT



出色 · 源于对品质的专注

公司简介

COMPANY PROFILE

新远大专业订做工业烘干线，烘箱，电焗炉流水线隧道炉，烘箱方案策划制作，产品质保一年！一直秉承诚信经营、客户至上，服务为本的理念，拥有多年丰富的业内经验、雄厚的人才技能团队，广受新老客户的一致好评！

东莞市新远大机械设备有限公司主要主营工业烤箱：二次硫化烘箱，铁氟龙高温烤箱，线路板电焗炉，丝印产品烘箱，工业电烤箱，电镀除氢烘箱，软线路板烤箱，高尔夫球头烘炉，高尔夫球杆烘炉，各类品牌汽车大灯烤箱，喷粉电炉、热风循环通用烘烤炉，玻璃烘箱，液晶成型烘箱，五金烤漆定型烤炉、塑胶、珠宝等烘烤脱水电容、电源、线路板，中、低温老化测试等等。高温烤箱有各类适合五金热处理、回火、定型等产品。

东莞市新远大机械设备有限公司主要主营工业隧道炉：适用于电子、IC、SMT、电机、通讯、电镀、塑料、五金、化工、丝印、喷涂、玻璃、陶瓷、木材建材等的精密烘烤、烘干、回火、预热、定型、加工工艺等。PET产品隧道炉，手机屏幕烘干线。电热管制造生产厂家，电加热器，干燥管，干燥管，液体加热器。

集开发、设计、制造、销售于一体。

New Broad professional customized industrial drying line, oven, electric baking furnace assembly line tunnel furnace, oven program planning and production, product warranty for one year! Has been adhering to the integrity of management, customer first, service-oriented concept, with many years of rich experience in the industry, strong talent and skills team, widely praised by new and old customers!

Dongguan Xinyuanda Machinery Equipment Co., Ltd. is mainly engaged in industrial ovens: secondary vulcanization oven, Teflon high-temperature oven, circuit board electric oven, silk screen printing product oven, industrial electric oven, electroplating hydrogen removal oven, soft circuit board oven, golf head oven, golf club oven, all kinds of brand automobile headlight oven, powder spray electric furnace, hot air circulation general oven, glass oven, LCD molding oven, hardware baking paint stereotyped oven, plastic, jewelry and other baking dehydration capacitors, power supply, circuit board, medium and low temperature aging test and so on. High temperature oven has a variety of products suitable for hardware heat treatment, tempering, shaping and so on.

Dongguan Xinyuanda Machinery Equipment Co., Ltd. is mainly engaged in industrial tunnel furnaces: suitable for precision baking, drying, tempering, preheating, shaping, processing technology of electronics, IC, SMT, motor, communication, electroplating, plastics, hardware, chemicals, silk screen printing, spraying, glass, ceramics, wood building materials, etc. PET product tunnel furnace, mobile phone screen drying line. Electric heating tube manufacturer, electric heater, dry pipe, dry burning pipe, liquid heater.

Development, design, manufacturing, sales in one.



出色 · 源于对品质的专注

我们的企业价值观

OUR CORPORATE VALUES

使命：提供具有竞争力的设备解决方案和服务，持续为客户创造最大价值。

愿景：成为最懂客户，最受尊敬的设备生产企业。

价值观：正直、进取、合作、创新、感恩、诚信、节俭。

理念：员工与企业共成长，成就每一个员工。

追求：在干燥设备和非标自动化设备领域实现顾客之梦想，锲而不舍的艰苦追求，使我们成为一流的科技创新企业。

Mission: to provide competitive equipment solutions and services and continue to create maximum value for customers.

Vision: to become the most knowledgeable and respected equipment manufacturer.

Values: integrity, enterprising, cooperation, innovation, gratitude, integrity and thrift.

Philosophy: employees and enterprises grow together and achieve every employee.

Pursuit: realize the dream of customers in the field of drying equipment and non-standard automation equipment. Our persistent and hard pursuit makes us a first-class scientific and technological innovation enterprise.



CATALOGUE 目录



热风循环烤箱 通用型标准机 节能恒温.....	1
无尘精密烤箱 高尔夫球头烤箱.....	2
热风循环高温炉 烧结炉 回火炉.....	3
推车款烤箱 单推双推 简单轨道 滑轨烤箱.....	4
安全防爆烤箱 防爆门 浓度报警器.....	5-6
大型电烤房 燃气烘室.....	7
充氮真空烤箱.....	8
恒温恒湿实验箱.....	9
鼓风干燥箱.....	10
Uv炉.....	11
光源系统.....	12
Uv隧道炉.....	13
隧道炉.....	14
精密隧道炉系列.....	15
隧道炉产品说明.....	16
隧道炉产品展示.....	17-18
物流输送设备.....	19
大型五金，大型粉末自动烘烤线.....	20
无尘车间.....	21
选用配件.....	22

风向指引 Wind direction guidance

上下运风式：适合较小型产品烘烤，如玩具、五金零件漆烤。


左右运风式：适合较大型产品之脱水，烘干，如电镀业。

水平运风式：适合纸张产品烘烤，如金属及胶片及丝印，皮革类加工。

Up and down wind type: suitable for baking smaller products, such as toys, hardware parts paint baking.

Left and right wind type: suitable for dehydration and drying of larger products, such as electroplating industry.

Horizontal wind type: suitable for baking paper products, such as metal and film and silk screen printing, leather processing.

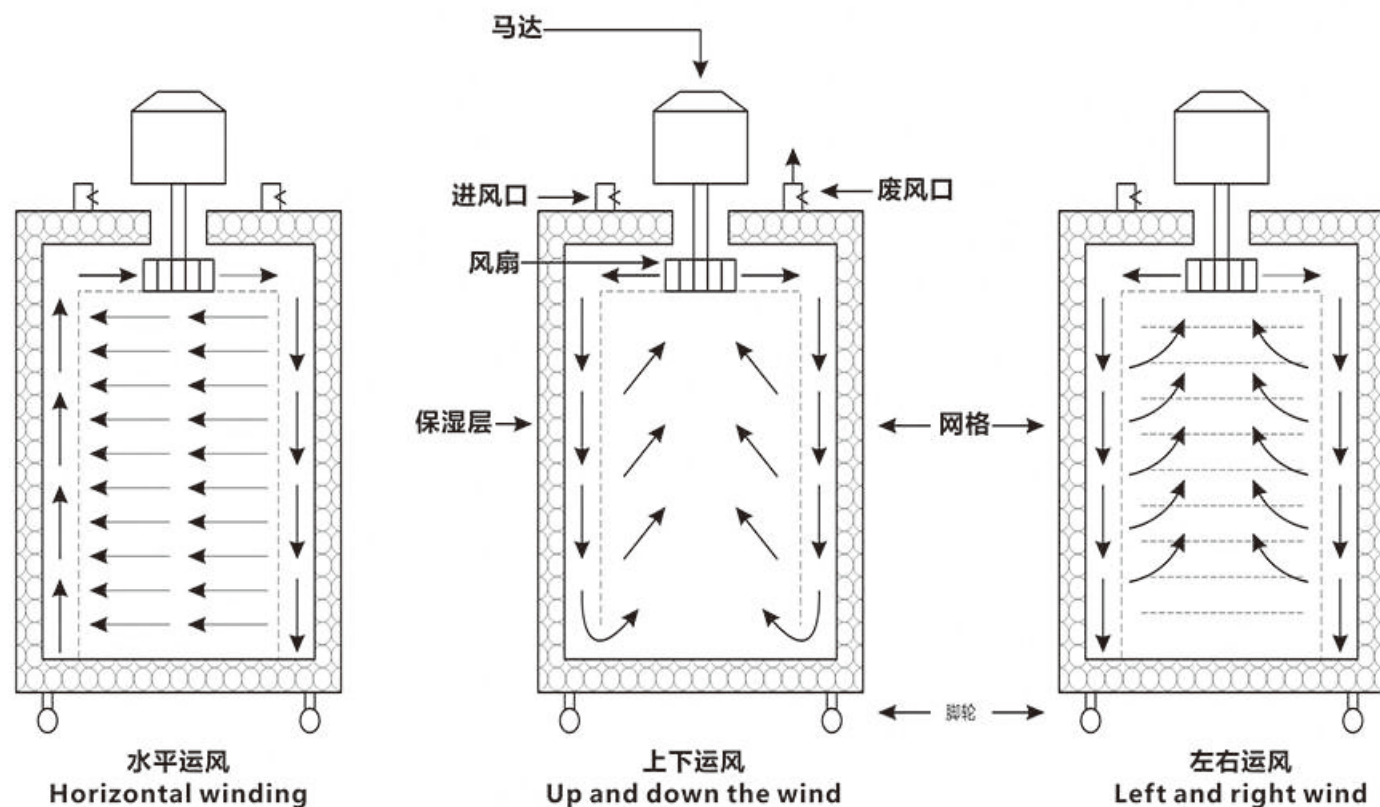

技术参数 Technical parameter

产品型号 Product model	内尺寸 Internal dimension H*W*D	外尺寸 External dimension H*W*D	电力规格 Power specification	门式 Portal type	最高温度 Maximum temperature	温度均匀性 Temperature uniformity	操作面板位置 Operation panel position
XUD-1000	500*610*500	1260*1160*960	6KW	单门	500℃	±3%	上方
XUD-800-GW	800*610*600	1560*1160*1060	9KW	单门	500℃	±2%	上方
XUD-900-GW	900*610*500	1860*1160*960	18KW	单门	400℃	±2%	上方
XUD-1000-GW	1000*610*500	1660*1160*960	24KW	单门	200℃	±2%	上方
XUD-1200-GW	1200*810*600	1860*1360*1200	24KW	单门	200℃	±2%	上方
XUD-1500-GW	1500*1200*800	2250*1700*1250	32KW	双门	400℃	±2%	右方

热风循环烤箱 通用型标准机 节能恒温

HOT AIR CIRCULATION OVEN UNIVERSAL STANDARD MACHINE ENERGY SAVING CONSTANT TEMPERATURE



XUD-168精密烤箱

产品特点 Product features


1. 采用智能温控器，配好SSR固态继电器输出。
 2. 节能理念：岩棉+反射铝板+空气隔层热设计，表面温度 $\leq 10^{\circ}\text{C}$
 3. 烤箱门密封可调节。内壳不锈钢制作，方便保洁
 4. 加热器使用寿命 ≥ 5 年
- 运风方式：单面水平运风或双面水平运风。温度范围：常温-200 $^{\circ}\text{C}$ $\geq 500^{\circ}\text{C}$ 需定制
1. Intelligent temperature controller and SSR solid state relay output are adopted
 2. Intelligent temperature controller and SSR solid state relay output are adopted
 3. The oven door seal is adjustable. The inner party is made of stainless steel, which is convenient for cleaning
 4. Service life of heater ≥ 5 years




XUD-线路板专用烤箱



XUD-965热风循环烤箱

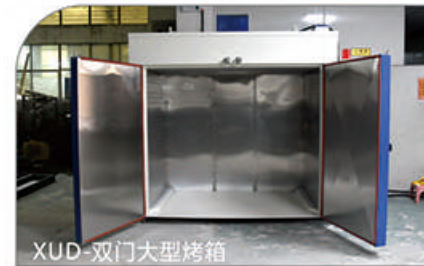

XUD-双门大型烤箱

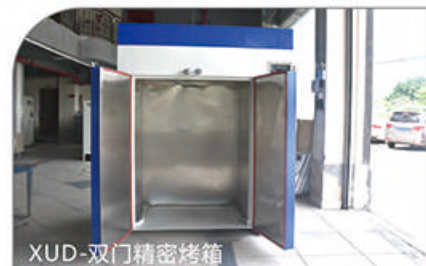

XUD-双门精密烤箱



XUD-单门标准推车烤箱



XUD-单门标准推车烤箱

技术参数 Technical parameter

产品型号 Product model	内尺寸 Internal dimension H*W*D	外尺寸 External dimension H*W*D	电力规格 Power specification	门式 Portal type	最高温度 Maximum temperature	温度均匀性 Temperature uniformity	操作面板位置 Operation panel position
XUD*900A	900*610*500	1580*910*590	380V 6KW	单门	200 $^{\circ}\text{C}$	$\pm 2\%$	上方
XUD*900B	900*610*500	1580*900*590	380V 6KW	单门	200 $^{\circ}\text{C}$	$\pm 2\%$	上方
XUD*900G	900*610*500	1650*1020*700	380V 9KW	单门	400 $^{\circ}\text{C}$	$\pm 2\%$	上方
XUD*1000B	1000*800*600	1780*1000*720	380V 9KW	单门	200 $^{\circ}\text{C}$	$\pm 2\%$	上方
XUD*1000G	1000*800*600	1850*1200*800	380V 12KW	单门	400 $^{\circ}\text{C}$	$\pm 2\%$	上方
XUD-8008	800*800*800	1580*1000*1000	380V 10KW	单面	200 $^{\circ}\text{C}$	$\pm 2\%$	上方

无尘精密烤箱 高尔夫球头烤箱

DUST-FREE PRECISION OVEN GOLF HEAD OVEN



XUD-250-6门高尔夫球头专业烤箱

产品特点 Product features

- 应用：适用电子、高尔夫球头、按键、软线路板、手机盖板
- 特点：1. 采用智能温控器，配好SSR固态继电器输出
2. 节能理念：岩棉+反射铝板+空气隔层热设计
3. 多门独立控制、同时工作互不干扰
4. 升温快、温度回复迅速
- Application: suitable for electronics, golf head, buttons, soft circuit boards, mobile phone covers
- Features:
1. Intelligent thermostat, equipped with SSR solid state relay output
 2. Energy-saving concept: rock wool + reflective aluminum plate + air insulation thermal design
 3. Multi-door independent control, simultaneous work does not interfere with each other
 4. Fast heating and rapid temperature recovery



XUD-200-6球头专用烤箱



XUD-400-3球头烤箱



XUD-250-5带通讯精密球头烤箱



XUD-无尘精密烤箱



XUD-300-2精密球头烤箱



XUD-400-4高尔夫球头烤箱

技术参数 Technical parameter

产品型号 Product model	内尺寸 Internal dimension H*W*D	外尺寸 External dimension H*W*D	电力规格 Power specification	门式 Portal type	最高温度 Maximum temperature	温度均匀性 Temperature uniformity	操作面板位置 Operation panel position
XUD-250-4	250*750*650	2200*1120*1080	380V 18KW	四门	200 $^{\circ}\text{C}$	$\pm 3\%$	右方
XUD-200-5	200*700*600	2100*1100*1000	380V 15KW	五门	200 $^{\circ}\text{C}$	$\pm 2\%$	右方
XUD-400-3	400*600*500	1860*900*850	380V 15KW	三门	200 $^{\circ}\text{C}$	$\pm 2\%$	上方
XUD-400-4	450*500*650	1650*1520*1080	380V 15KW	四门	200 $^{\circ}\text{C}$	$\pm 2\%$	上方
XUD-500-4	500*500*500	1750*1520*1050	380V 20KW	四门	200 $^{\circ}\text{C}$	$\pm 2\%$	右方
XUD-550-4	550*600*600	1850*1720*1050	380V 20KW	四门	200 $^{\circ}\text{C}$	$\pm 2\%$	右方
XUD-300-2	300*400*500	760*950*1150	380V 6KW	二门	200 $^{\circ}\text{C}$	$\pm 2\%$	右方

热风循环高温炉 烧结炉 回火炉

HOT AIR CIRCULATION HIGH TEMPERATURE FURNACE SINTERING FURNACE TEMPERING FURNACE




XUD-500度铁氟龙专用烤箱

产品特点 Product features


1. 采用智能温控器，配好SSR固态继电器输出
 2. 节能理念：岩棉+反射铝板+空气隔层热设计
 3. 温度均匀性良好
 4. 节能原理设计，比传统高温烤箱节能电20-30%
 5. 升温快、温度回复迅速
- 应用范围：适用于五金、塑胶、模具等金属高温退火处理
1. Intelligent temperature controller is adopted and SSR solid-state relay output is equipped
 2. Energy saving concept: rock wool + reflective aluminum plate + thermal design of air compartment
 3. Good temperature uniformity
 4. Energy saving principle design, 20-30% more energy-saving than traditional high-temperature oven
 5. Rapid temperature rise and rapid temperature recovery
- Scope of application: suitable for high temperature annealing of metals such as hardware, plastics and molds




XUD-500度高温烤箱

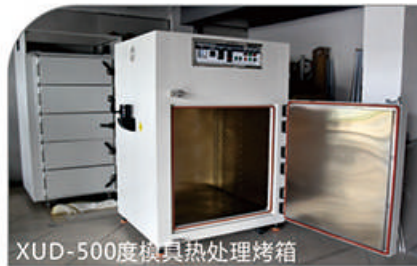


XUD-500度模具热处理烤箱

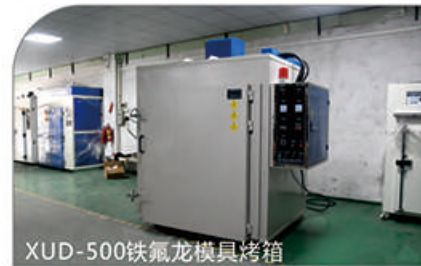

XUD-500度铁氟龙模具烤箱

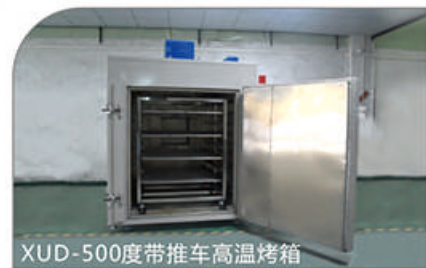

XUD-500度带推车高温烤箱

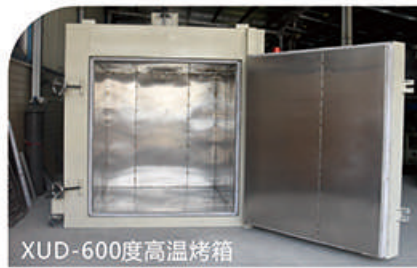

XUD-600度高温烤箱



400度宝石固化烤箱

技术参数 Technical parameter


产品型号 Product model	XUD-500-JM	XUD-800-JN	XUD-900-JN	XUD-1000-JN	XUD-1200-JN	XUD-1500-JN
内尺寸 Internal dimension H*W*D	500*610*500	800*610*600	900*610*500	1000*610*500	1200*810*600	1500*1200*800
外尺寸 External dimension H*W*D	1260*1160*960	1560*1160*1060	1860*1160*960	1660*1160*960	1860*1360*1200	2250*1700*1250
电力规格 Power specification	380V 12KW	380V 18KW	380V 21KW	380V 24KW	380V 27KW	380V 45KW

推车款烤箱 单推双推 简单轨道 滑轨烤箱

TROLLEY OVEN - SINGLE PUSH DOUBLE PUSH




XUD-1800大型双推烤箱

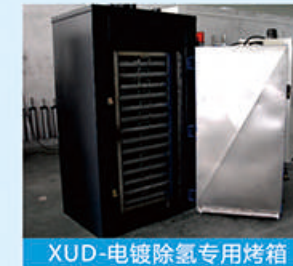

XUD-电镀除氢专用烤箱



XUD-双门大型烤箱

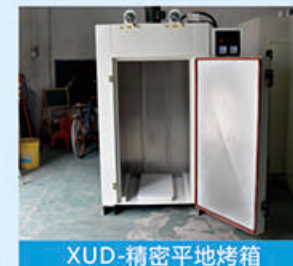

XUD-精密平地烤箱




XUD-双门精密烤箱



XUD-平地推车烤箱



XUD-双门精密烤箱

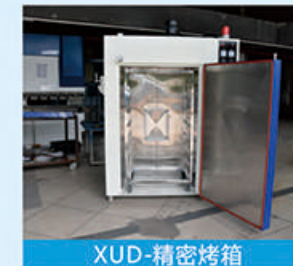

XUD-精密烤箱



XUD-大型工业烤箱



XUD-大型五金烤漆专用烤箱

产品特点 Product features

1. 采用智能温控器，配好SSR固态继电器输出。
 2. 节能理念：岩棉+反射铝板+空气隔层热设计，表面温度 $\leq 10^{\circ}\text{C}$
 3. 烤箱门密封可调节。内壳不锈钢制作，方便保洁
 4. 加热器使用寿命 ≥ 5 年
- 运风方式：单面水平运风或双面水平运风。温度范围：常温- 200°C $\geq 500^{\circ}\text{C}$ 需定制
1. Adopt intelligent temperature controller and configure SSR solid-state relay output
 2. Energy saving concept: rock wool + reflective aluminum plate + air insulation thermal design, surface temperature $\leq 10^{\circ}\text{C}$
 3. The oven door seal is adjustable. Inner party made of stainless steel, convenient for cleaning
 4. Service life of heater ≥ 5 years
- Air transportation mode: single side horizontal air transportation or double side horizontal air transportation. Temperature range: normal temperature - 200°C $\geq 500^{\circ}\text{C}$, customized

安全防爆烤箱 防爆门 浓度报警器

SAFETY EXPLOSION-PROOF OVEN EXPLOSION-PROOF DOOR CONCENTRATION ALARM



XUD-无尘精密防爆烤箱



XUD-无尘精密LED专用烤箱

产品特点 Product features

1. 安全防爆门锁。
2. 易燃易爆，安装它，放心！
3. 防爆安全门。

应用范围：适用于五金、塑胶、模具等金属高温退火处理

1. Safety explosion-proof door lock.
2. flammable and explosive, install it, rest assured!
3. Explosion-proof safety door.

Application: suitable for high temperature annealing of metals such as hardware, plastics, molds and so on



XUD-PCB板专用烤箱



XUD-无尘精密摄像头专用烤箱



XUD-电镀除氢防爆烤箱



XUD-双开门PCB板专用烤箱



XUD-真空镀除氧专用烤箱



XUD-大型工业烤箱

安全防爆烤箱 防爆门 浓度报警器

SAFETY EXPLOSION-PROOF OVEN EXPLOSION-PROOF DOOR CONCENTRATION ALARM




XUD-五金烤漆防爆专用烤箱



XUD-亚克力专用烤箱




XUD-双门大型电镀专用烤箱

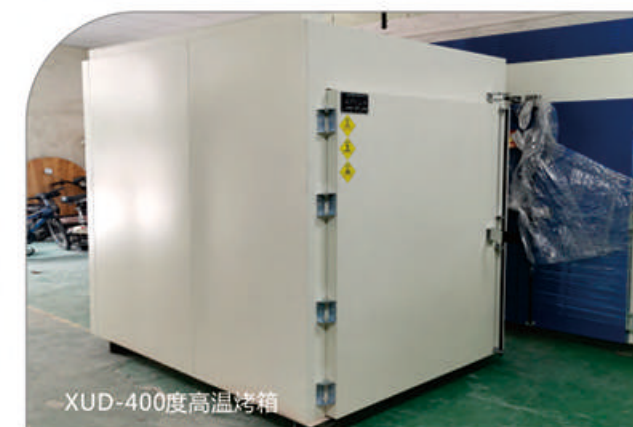

XUD-400度高温烤箱




XUD-500铁氟龙专用烤箱

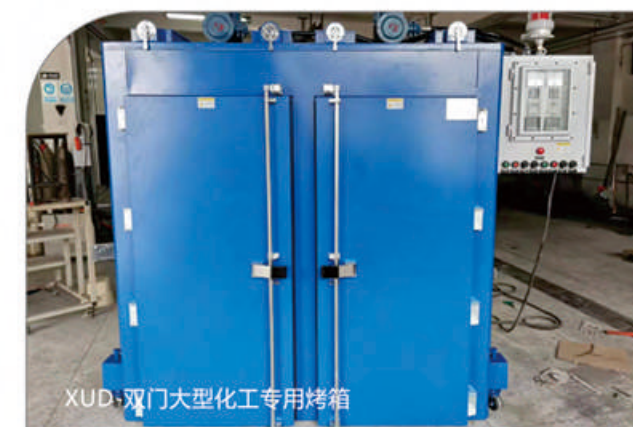

XUD-双门大型化工专用烤箱

大型电烤房 燃气烘室

LARGE ELECTRIC OVEN GAS OVEN

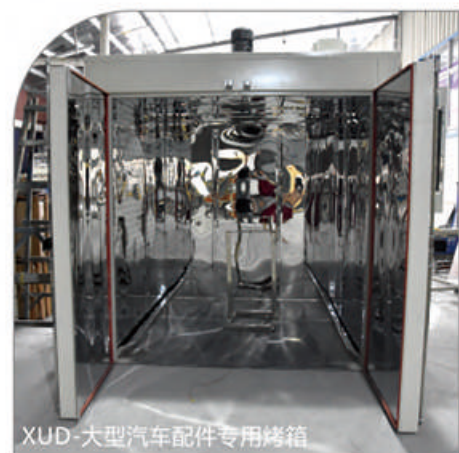

XUD-大型汽车配件专用烤箱



XUD-大型天然气专用烤箱




XUD-大型五金粉末专用烤房

产品特点 Product features

1. 内层风孔板采用1.2mm不锈钢板制作。
2. 隔热层采用80mm厚度高密度硅酸铝岩棉保温隔热，外层温度不超过环境温度25℃。
3. 加热方式采用耐高温不锈钢加热管，电源380V10KW，从室温到120℃只需10分钟。
4. 热风循环方式：外界空气经过烤箱内加热后保持在箱内上下左右循环，剩余废气经排气口排出。

1. The inner air hole plate is made of 1.2mm stainless steel plate.
2. The thermal insulation layer adopts 80mm thickness high-density aluminum silicate rock wool thermal insulation, and the outer temperature does not exceed the ambient temperature of 25 °C.
3. The heating method adopts high temperature resistant stainless steel heating tube, the power supply is 380V10KW, and it takes only 10 minutes from room temperature to 120 °C.
4. Hot air circulation mode: the outside air is heated in the oven and kept circulating up and down the left and right in the box, and the remaining exhaust gas is discharged through the exhaust port.



XUD-大型五金对开门烤箱



XUD-大型飞机硫化专用烤箱



XUD-大型五金粉末专用烤房



XUD-大型铝材时效炉



XUD-大型五金工业烤房




XUD-大型五金对开门烤箱



XUD-大型精密烤箱



XUD-大型精密烤箱

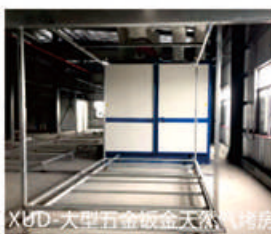


XUD-大型五金钣金天然烤房



XUD-大型五金工业烤房

充氮真空烤箱

NITROGEN-FILLED VACUUM OVEN

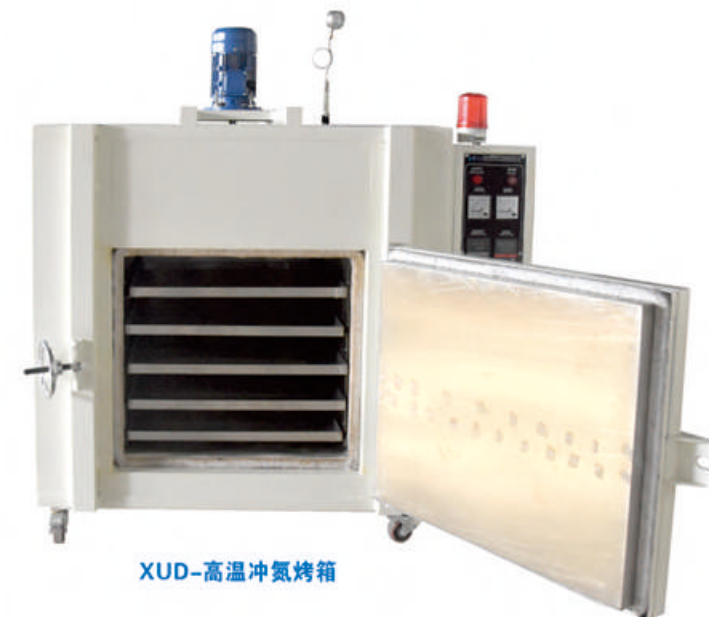

XUD-高温冲氮烤箱



真空烤箱

产品特点 Product features

通过专用检测仪表对：真空度或氮气输出信号并送到PLC，由PLC完成如下功能：抽真空—充氮气—抽真空—充氮气（反复循环）

Through the special detection instrument pair: vacuum degree or nitrogen output signal and sent to the PLC, the PLC to complete the following functions: vacuum - nitrogen filling - vacuuming - nitrogen filling (repeated circulation)



恒温恒湿试验箱

CONSTANT TEMPERATURE AND HUMIDITY TEST BOX



使用范围 Use scopes

应用范围：适用于电子、电器、电池、塑料、食品、纸制品、车辆、金属、化工、建材、科研院所、等单位

Scope of application: suitable for electronics, electrical appliances, batteries, plastics, food, paper products, vehicles, metals, chemicals, building materials, research institutes, and other units



鼓风干燥箱

BLAST DRYING BOX

使用范围 Use scopes

适用于工矿企业、大专院校、科研院所、医药卫生等单位实验室对物品进行干燥、烘焙、热处理之用。

1. 外壳采用优质冷板加工成型，表面经喷涂工艺处理。
2. 工作室分为不锈钢或镀锌板加工制造。
3. 智能数显PID控温仪表具有定时、超温报警、温度偏差修整、控温自整定等功能。
4. A为镀锌板内胆，AB为不锈钢内胆，B E为液晶显示屏不锈钢内胆。

It is suitable for industrial and mining enterprises, colleges and universities, scientific research institutes, medicine and health and other unit laboratories to dry, bake and heat treat articles.

1. The shell is formed by high-quality cold plate processing, and the surface is treated by spraying process.
2. The studio is divided into stainless steel or galvanized sheet processing and manufacturing.
3. Intelligent digital display PID temperature control instrument, with timing, over-temperature alarm, temperature deviation trimming, temperature control self-tuning and other functions.
4. A is the galvanized plate liner, AB is the stainless steel liner, and B E is the LCD stainless steel liner.



产品型号 Product model	内尺寸 H*W*D	外尺寸 H*W*D	电力规格 Power specifications	温控仪 Thermostat	最高温度 Maximum temperature	操控面板位置 Manipulate the position of the panel
42L-350-A	350*360*350	350*360*350	470*670*570	智能数显	200°C	下方
42L-350-B	350*360*350	350*360*350	700*500*490	智能数显	200°C	左方
72L-450-A	450*400*400	450*400*400	510*710*670	智能数显	200°C	下方
72L-450-B	450*400*400	450*400*400	670*710*510	智能数显	200°C	左方
125L-450-A	550*550*450	550*550*450	910*640*59	智能数显	200°C	下方
125L-550-B	550*500*450	550*500*450	770*810*570	智能数显	200°C	左方
42L-350-G	350*360*350	350*360*350	650*750*510	智能数显	200°C	左方

UV 炉

UV FURNACE



XUD-光电胶水固化专用UV炉



XUD-LED胶水固化UV炉



XUD-摄像头固化炉

产品特点 Product features

1. 各灯独立控制，可自由调整高度及角度
2. 具备无极调整光照强度
3. 比传统UV机节能30%
4. 可显示灯管电压、电流、功率、运行时间、可设定工作时间及显示UV室内温度


1. Each lamp is independently controlled, and the height and angle can be adjusted freely
2. With stepless adjustment of light intensity
3. 30% energy saving than traditional UV machine
4. Can display lamp voltage, current, power, running time, can set the working time and display UV room temperature



XUD-玩具喷漆固化UV炉




XUD-小型摄像头专用UV炉

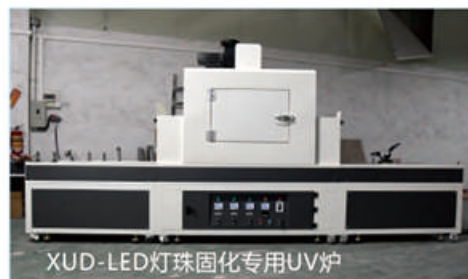


XUD-LED灯珠固化专用UV炉



XUD-笔记本外壳喷漆固化UV炉

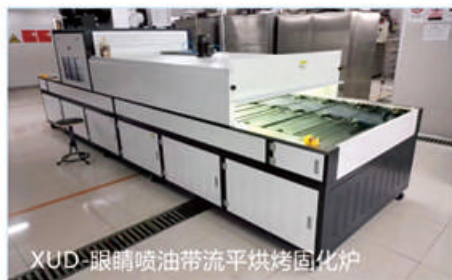

XUD-眼镜喷漆带流平烘烤固化炉

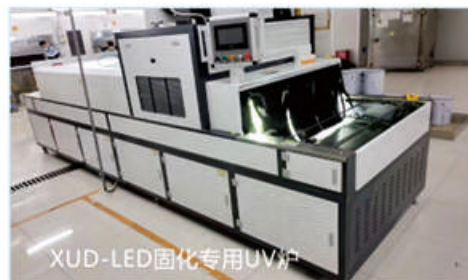

XUD-LED固化专用UV炉

技术参数 Technical parameter

产地	广东省	是否进口	否	加工定制	是
品牌	新远大	型号	4012-30	用途	uv胶水
外形尺寸	330×520×1240mm	重量	80 (kg)	uv主峰波长	365nm
功率密度	80	总功率	2.2kw	传送带款	200

光源系统

LIGHT SOURCE SYSTEM

包括：UV灯管、UV灯箱、变压器(镇流器)、电容组成。
Including: UV lamp, UV light box, transformer (ballast), capacitor composition.



产品特点 Product features

UV灯功率选择

UV lamp power selection

- UV灯的功率即UV灯光的辐射能量，也称穿透力。首先，它一定要满足UV油墨(光油/油墨)吸收的光谱波长及功率密度的要求。若UV灯的功率不够，即使光照时间再长，过UV固化装置的次数再多，产品也达不到完全固化。相反，还会使UV油墨(光油)表层老化、封闭、变脆等，同时油墨(光油)的附着力也不好，会使叠印的层间结合力差。因为低功率的UV灯光不能穿透磨、墨层底部，使底部未固化或固化不充分。
- UV灯功率一般要满足80~160W/cm的要求，但功率越大热量也会越大，因此如何进行降温来应对不同的照射产品已是每个每个厂商所必须进行的课题。
- UV灯的最佳使用寿命一般为800~1000小时，达到后即应更换，因为到此时段的UV灯所发射的紫外光线的强度变弱严重，非常降低固化效果。同时建议在使用期内根据生产环境(空气的含尘量)不同，在适当时间用无水乙醇清洁灯管表面及反射罩表面的反射板，再将UV灯管转90°。这样有利于UV射线全部有效辐射到UV油墨或光油上，保证一定的穿透力。
- The power of the UV lamp, that is, the radiant energy of the UV light, is also called the penetrating power. First, it must meet the spectral wavelength and power density requirements of UV inks (varnish/ink) absorption. If the power of the UV lamp is not enough, even if the illumination time is longer, the number of times of passing the UV curing device is more, and the product does not reach full curing. On the contrary, it will also make the UV ink (varnish) surface layer Aging, sealing, brittleness, etc., while the adhesion of the ink (varnish) is not good, which will result in poor adhesion between the layers of the overprint. Because low-power UV light can't penetrate the bottom of the mill and the ink layer, the bottom is not cured or cured.
- The UV lamp power generally needs to meet the requirements of 80~160W/cm, but the higher the power, the greater the heat. Therefore, how to reduce the temperature to deal with different illumination products is a problem that every manufacturer must carry out.
- The optimum service life of the UV lamp is generally 800~1000 hours. It should be replaced after it is reached, because the intensity of the ultraviolet light emitted by the UV lamp during this period becomes weak, which greatly reduces the curing effect. At the same time, it is recommended to clean the surface of the lamp tube and the surface of the reflector with anhydrous ethanol at the appropriate time according to the production environment (the dust content of the air). Reflect the plate and turn the UV tube to 90°. This is beneficial for all UV radiation to be effectively radiated onto the UV ink or varnish to ensure a certain penetration.

技术参数 Technical parameter

型号 Model	内尺寸 Inner dimension	外尺寸 External dimensions	温度范围 Temperature range	电压/功率 Voltage/power	网带系列 Mesh belt series
	L*W*H(mm)	L*W*H(mm)			
XUD-UV-2000	2000*400*1500	2000*600*1250	常温-80° (可调节) Normal temperature -80°	220V/2KW	铁氟龙网带 Teflon mesh belt

UV 隧道炉

UV TUNNEL FURNACES

产品特点 Product features

- 采用3套7KW进口UV光源。配日本原装卤素灯管，前后均匀分布在炉内(配升压变压器、反光罩、灯管、电容)，加装UV镜面反光装置，大大提高紫外光的使用率可达35%。各组UV灯可单独控制，每组灯管可独立调整半光/全光，配可调节角度的调节机构，均可左右、上下高度调节(可调节角度为90度)，增加可调整UV灯管角度的调节装置，炉盖上方均装有调节UV灯管上下高度的旋钮手柄适用不同规格。
- (灯管的总长1100mm，有效光距1050mm，波长为365nm)装有自动计时器，可随时监控灯管的使用时间，方便灯管的更换。每套灯管都独立装有进口石英隔热玻璃，有效阻止其红外线热量辐射到产品，以免其产品受温度过高而变形。(UV的控制电器装于丝印房内的控制电箱内)。
- 采用强制风冷，UV区独有的百叶窗进风风口和独立的小门可随时打开便于清理，配大风量离心上抽风机3台，每台0.55KW，下抽风机2台，每台0.75KW，内装有四个进口进风小风机，有效降低产品及UV炉内的温度，提高灯管的使用寿命。
- Using 3 sets of 7KW imported UV light source. With the original Japanese halogen lamp, the front and back are evenly distributed in the furnace (with step-up transformer, reflector, lamp, capacitor), and the UV mirror reflector is installed, which greatly improves the use of ultraviolet light up to 35%. Each group of UV lamps can be controlled individually, each group of lamps can be independently adjusted half-light / full light, with adjustable angle adjustment mechanism, can be adjusted left and right, up and down height (adjustable angle of 90 degrees), increase the adjustment device that can adjust the angle of UV lamp, above the furnace cover are equipped with a twisting handle that adjusts the height of UV lamp tube up and down, suitable for different specifications.
- (The total length of the lamp is 1100mm, the effective light distance is 1050mm, and the wavelength is 365nm) is equipped with an automatic timer, which can monitor the use time of the lamp at any time and facilitate the replacement of the lamp. Each set of lamps is independently equipped with imported quartz thermal insulation glass, which effectively prevents its infrared heat from radiating to the product, so as to avoid the product from being deformed by excessive temperature. (The UV control electrical appliances are installed in the control box in the screen printing room).
- The use of forced air cooling, UV zone unique shutter inlet and independent small door can be opened at any time to facilitate cleaning, with a large air volume centrifugal upper exhaust fan 3 sets, each 0.55KW, the lower exhaust fan 2 sets, each 0.75KW, equipped with four imported air inlet small fans, effectively reduce the temperature in the product and UV furnace, improve the service life of the lamp.



XUD-UVL-12000

技术参数 Technical parameter

型号 Model	内尺寸 Inner dimension L*W*H(mm)	外尺寸 External dimensions L*W*H(mm)	温度范围 Temperature range	电压/功率 Voltage/power	网带系列 Mesh belt series
XUD-SDL-5000	5000*400*150	5000*850*1050	常温-200° Normal temperature -200°	380V/20KW	不锈钢网带 Stainless steel mesh belt
XUD-SDL-11500	11500*900*150	11500*1000*900	常温-150° Normal temperature -150°	380V/27KW	铁氟龙网带 Teflon mesh belt
XUD-SDL-13500	13500*1000*150	13500*1100*900	常温-150° Normal temperature -150°	380V/36KW	铁氟龙网带 Teflon mesh belt
XUD-SDL-20000	20000*1000*200	20000*1200*950	常温-200° Normal temperature -200°	380V/54KW	铁氟龙网带 Teflon mesh belt

隧道炉

TUNNEL FURNACES

产品特点 Product features

- 1、低能耗,确保质量
 - 2、无极调节速度
 - 3、精密小配件烘烤预热
 - 4、应用范围:五金、塑料、喷涂、丝印行业定制隧道炉
- 1, low energy consumption, to ensure quality
 2. Stepless adjustment speed
 3. Baking and preheating of precision gadgets
 4. Application scope: customized tunnel furnace for hardware, plastic, spraying, silk screen printing industry



XUD-塑胶丝印专用隧道炉



XUD-400度高温精密隧道炉




XUD-压铸件清洗专用隧道炉



XUD-五金喷油烘烤专用隧道炉



XUD-大型五金热处理隧道炉

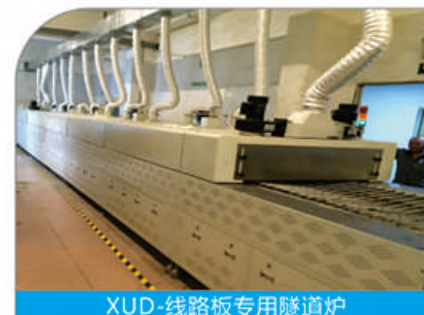

XUD-线路板专用隧道炉

技术参数 Technical parameter

型号 Model	内尺寸 Inner dimension L*W*H(mm)	外尺寸 External dimensions L*W*H(mm)	温度范围 Temperature range	电压/功率 Voltage/power	网带系列 Mesh belt series
XUD-SDL-4000	4000*450*150	4000*850*950	常温-150° Normal temperature -150°	380V/20KW	不锈钢网带 Stainless steel mesh belt
XUD-SDL-2600	2600*450*100	2800*400*1150	常温-120° Normal temperature -120°	380V/9KW	不锈钢网带 Stainless steel mesh belt
XUD-SDL-13500	13500*1000*150	13500*1100*900	常温-150° Normal temperature -150°	380V/27KW	铁氟龙网带 Teflon mesh belt
XUD-SDL-9600	3600*800*200	3600*1000*1000	常温-200° Normal temperature -200°	380V/36KW	铁氟龙网带 Teflon mesh belt

精密隧道炉系列

Precision tunnel furnace series

产品特点 Product features

- 本设备采用国外先进技术设计制造，结构先进、拆装简便、外形美观。
- 选用国内新型保温材料、隔热保温性强，选用远红外加热技术，加热元件布置合理，能源消耗低。
- 采用热风循环使炉内温度更均匀，确保烘烤产品质量。
- 电控柜采用先进数码自动控温系统，在常温-200℃之间可以任意调节，反应灵敏，工作可靠。
- 可根据用户产品要求，设计制造各种非标烘箱及通过式烘道流水线。



XUD-SDL-3000

- The equipment is designed and manufactured by foreign advanced technology, with advanced structure, easy disassembly and assembly, and beautiful appearance.
- The domestic new thermal insulation material is selected, the heat insulation is strong, and the far infrared heating technology is adopted. The heating element is arranged reasonably and the energy consumption is low.
- The use of hot air circulation makes the temperature inside the furnace more uniform, ensuring the quality of baked products.
- The electric control cabinet adopts advanced digital automatic temperature control system, which can be adjusted freely between normal temperature and 200 ° C, with sensitive response and reliable operation.
- According to the requirements of users' products, we can design and manufacture various non-standard ovens and pass-through drying lines.



XUD-SDL-3500

技术参数 Technical parameter

型号 Model	内尺寸 Inner dimension L*W*H(mm)	外尺寸 External dimensions L*W*H(mm)	温度范围 Temperature range	电压/功率 Voltage/power	网带系列 Mesh belt series
JB-SDL-4000	4000*450*150	4000*850*950	常温-150° Normal temperature -150°	380V/20KW	不锈钢网带 Stainless steel mesh belt
JB-SDL-2600	2600*450*100	2600*400*1150	常温-120° Normal temperature -120°	380V/9KW	不锈钢网带 Stainless steel mesh belt
JB-SDL-13500	13500*1000*150	13500*1100*900	常温-150° Normal temperature -150°	380V/27KW	铁氟龙网带 Teflon mesh belt
JB-SDL-3600	3600*800*200	3600*1000*1000	常温-200° Normal temperature -200°	380V/36KW	铁氟龙网带 Teflon mesh belt




隧道炉产品说明

TUNNEL FURNACE PRODUCT DESCRIPTION

产品特点 Product features

- 整机尺寸: L9000*W1300*H1560mm
- 加热区: L6000*W1300*H1560mm
- 输送线: L9000*W1300*H850mm
- 上料区: L1500mm
- 冷却区: L1000mm, 采用6台排气扇强冷
- 下料区: L500mm
- 输送网链: 碳钢 2062 节距 38.1mm, 附带穿杆 SUS201*Φ12mm/156mm 网孔 15*20mm, SUS201 线径 Φ1.5mm
- 有效输送工件宽: W980mm*H200mm 可调
- 机身: 2.0 冷板制作
- 机架: 50*50*2.0mm 钢材制作
- 调节脚杯: M14*100L 可调节脚杯, 可调节高度 ±30mm
- 机身封板、机架封板: 1.2mm 冷板成形
- 动力: 1500W/220V/50Hz1:120 齿轮减速机马达配变频调速器, 输送速度 0.5-2m/min 可调
- 表面处理: 焊接处打磨抛光

- Machine size: L9000*W1300*H1560mm
- Heating zone: L6000*W1300*H1560mm
- Conveyor line: L9000*W1300*H850mm
- Loading area: L1500mm
- Cooling zone: L1000mm, with 6 exhaust fans
- Cutting area: L500mm
- Conveyor net chain: carbon steel 2062 moment 38.1mm, with wearing rod SUS201*Φ12mm/156mm mesh 15*20mm, SUS201 wire diameter Φ1.5mm
- Effective delivery of workpiece width: W980mm*H200mm adjustable
- Body: 2.0 cold plate production
- Rack: 50*50*2.0mm steel production
- Adjusting the foot cup: M14*100L adjustable foot cup, adjustable height ±30mm
- Body sealing plate, frame sealing plate: 1.2mm cold plate forming
- Power: 1500W/220V/50Hz1:120 gear reduction motor with frequency converter, conveying speed 0.5-2m/min adjustable
- Surface treatment: polishing and polishing

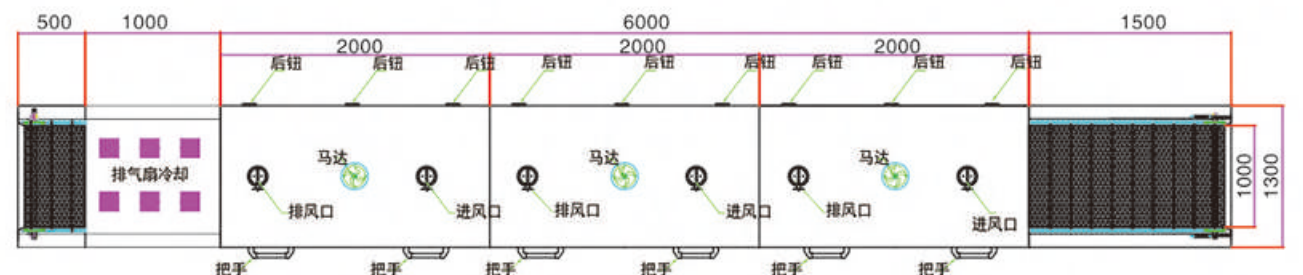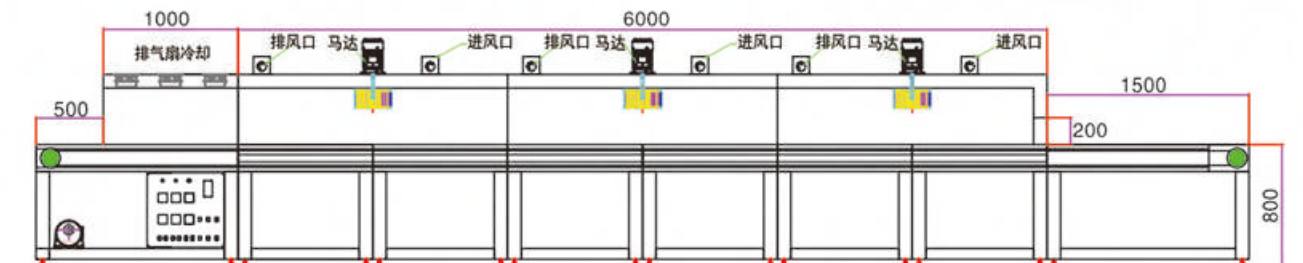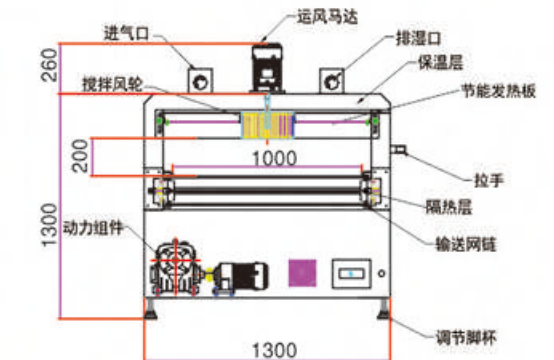

隧道炉-产品展示

TUNNEL FURNACES - PRODUCTS




XUD-摄像头预烤专用隧道炉



XUD-无尘精密隧道炉



XUD-大型天然气加热隧道炉

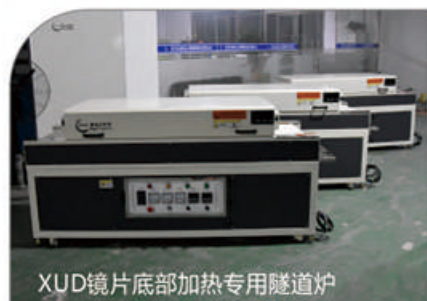


XUD-镜片底部加热专用隧道炉




XUD-底部加热炉




XUD-螺丝水粉专用隧道炉

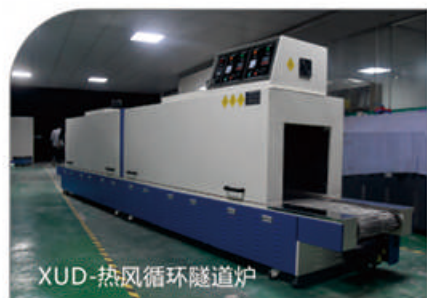

XUD-热风循环隧道炉

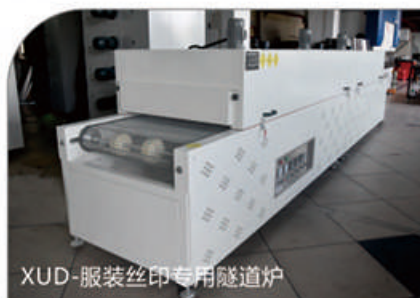

XUD-服装丝印专用隧道炉

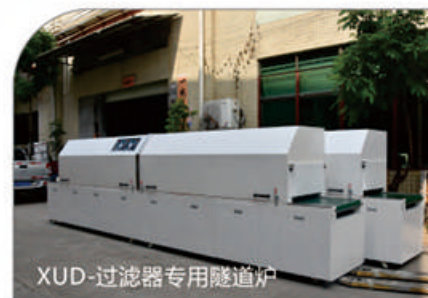

XUD-过滤器专用隧道炉



XUD-电子专用隧道炉




1XUD-精密无尘隧道炉




XUD-电感专用隧道炉

隧道炉-产品展示


TUNNEL FURNACES - PRODUCTS

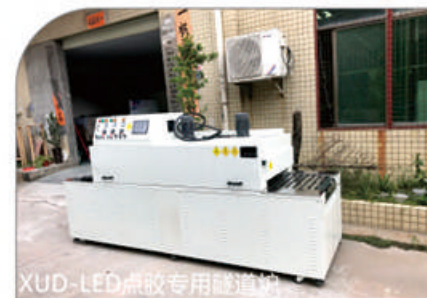

XUD-LED点胶专用隧道炉

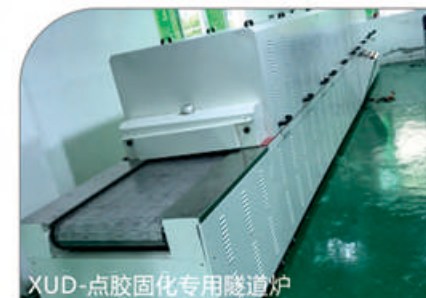


XUD-点胶固化专用隧道炉

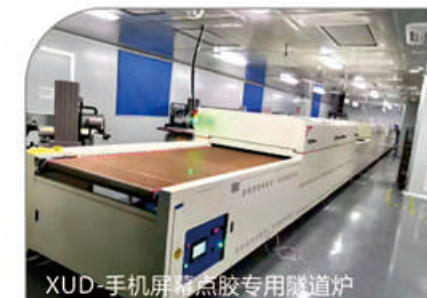


XUD-手机屏幕点胶专用隧道炉




XUD-400度高温隧道炉

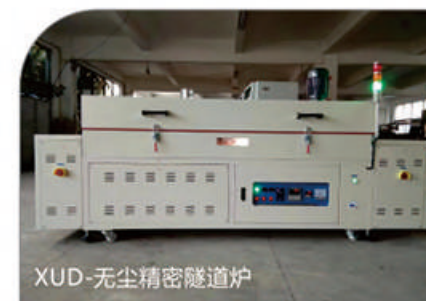


XUD-无尘精密隧道炉

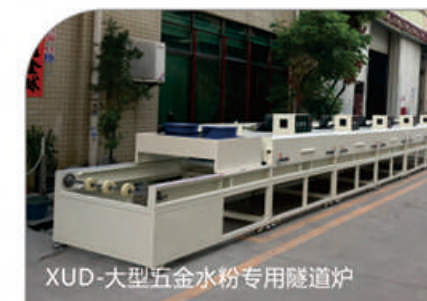

XUD-大型五金水粉专用隧道炉

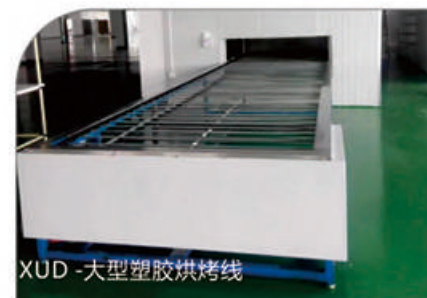


XUD-大型塑胶烘烤线

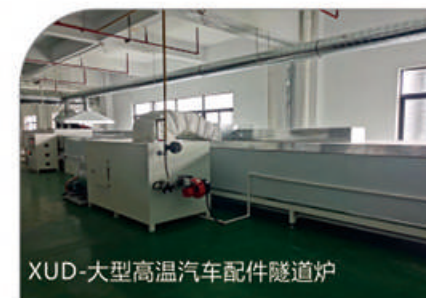


XUD-大型高温汽车配件隧道炉




XUD-硅胶硫化专用隧道炉

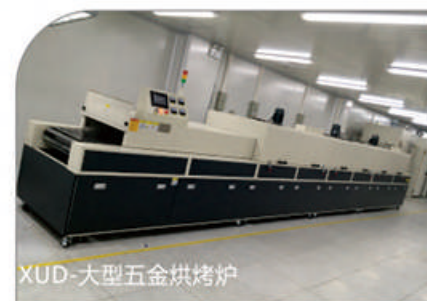

XUD-大型五金烘烤炉

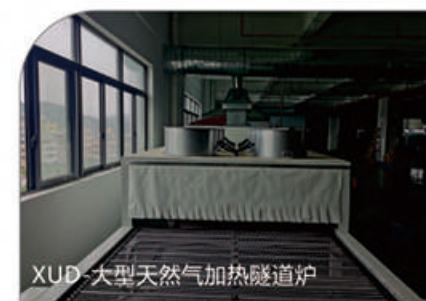

XUD-大型天然气加热隧道炉

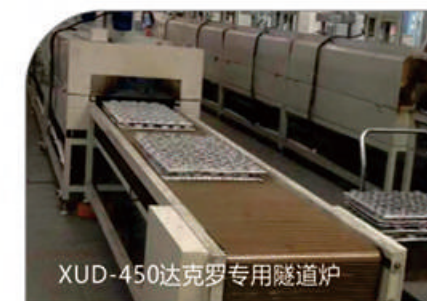

XUD-450达克罗专用隧道炉

物流输送设备

LOGISTICS CONVEYING EQUIPMENT

产品特点 Product features

皮带输送线: 皮带输送线广泛的应用于家用电器、通讯设备、电脑、电子元件、照明设备、车业、五金配件、家具用品等轻工业产品的生产、组装、检测各包装等。

无动力滚筒输送机: 无动力滚筒输送机结构简单, 使用经济可靠, 形成了标准化、系列化、通用化、广泛使用于自动化生产线中, 尤其能与各种现代化操作工艺很好的结合, 实现传输中加工, 分检, 包装, 储存等多工位操作, 在汽车, 包装, 机械加工等行业中广泛应用。

水平皮带输送机: 水平皮带输送机结构简单, 经济方便使用可靠。传输平稳效率高, 输送量大, 低噪音, 是输送机中最常用的一种传输机构, 适用散料, 不规则物品的输送其形式多样适用范围广。

Belt conveyor line: Belt conveyor line is widely used in household appliances, communication equipment, computers, electronic components, lighting equipment, automotive industry, hardware accessories, furniture supplies and other light industrial products production, assembly, testing of packaging and so on.

Unpowered rolling drum conveyor: The unpowered rolling drum conveyor has a simple structure, the use of economical and reliable, the formation of standardization, serialization, generalization, widely used in automated production lines, especially with a variety of modern operation technology is a good combination, to achieve transmission in the processing, picking, packaging, storage and other multi-station operation, in the car, packaging. Widely used in machining and other industries.

Horizontal belt conveyor: Horizontal belt conveyor has a simple structure, is economical and convenient, and reliable to use. Stable and efficient transmission, large conveying volume, low noise, is the most commonly used transmission mechanism in conveyors, suitable for bulk materials, irregular items of transport its form of a wide range of applications.




XUD-双层输送线




XUD-大型物流输送线




XUD-工装线

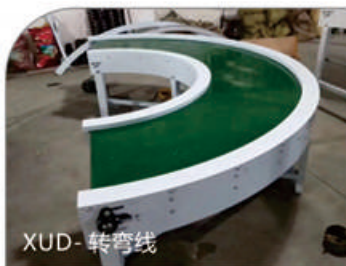

XUD-转弯线

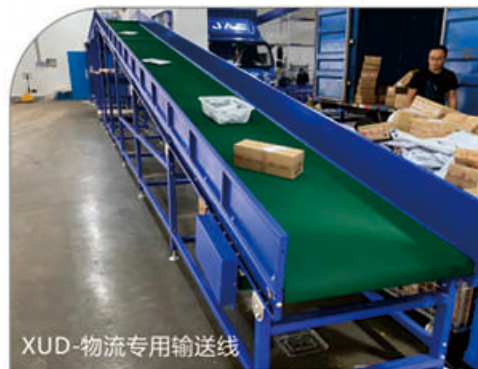


XUD-物流专用输送线

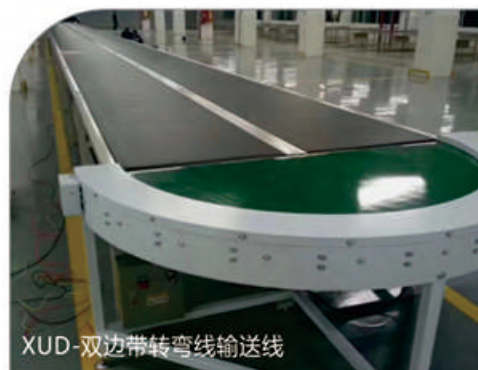

XUD-双边带转弯线输送线



XUD-食品斜坡输送线

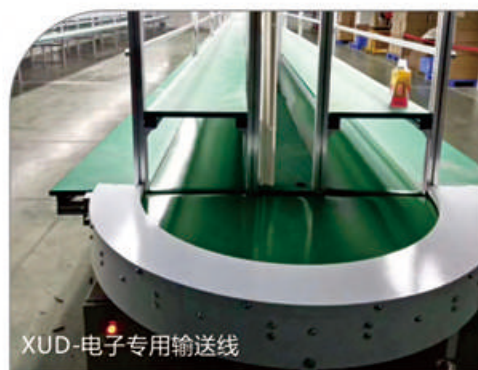

XUD-电子专用输送线

大型五金, 大型粉末自动烘烤线

LARGE HARDWARE, LARGE POWDER AUTOMATIC BAKING LINE



XUD-大型五金烘烤线



XUD-大型五金粉末烘烤线



XUD-大型高温五金吊空炉



XUD-大型钣金五金粉末烘烤线

产品特点 Product features

1. 机器人具备防撞检测功能, 柔性设计, 有效保护设备产品
2. 温度恒温稳定
3. 由不锈钢板、冷钢板、角钢制作, 表面覆漆, 工作室采用优质的结构钢板制作。
4. 外采用SECC钢板、精粉体烤漆处理; 内采用SUS不锈钢

1. The robot has anti-collision detection function, flexible design, effective protection of equipment products
2. Temperature constant temperature is stable
3. Made of stainless steel plate, cold steel plate, angle steel, surface coating, the studio is made of high-quality structural steel plate.
4. The exterior adopts SECC steel plate and fine powder baking paint treatment; The inside is made of SUS stainless steel



XUD-大型家具烘烤线



XUD-大型汽车配件烘烤线

无尘车间


DUST-FREE WORKSHOP



XUD-10万级无尘车间



XUD-自动线喷涂线

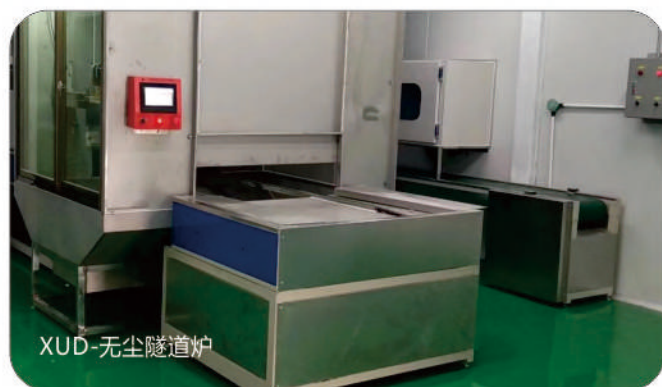

XUD-无尘隧道炉



XUD-高温涂装隧道炉



XUD-万级无尘车间




XUD-无尘车间



XUD-万级无尘车间



XUD-塑胶涂装线

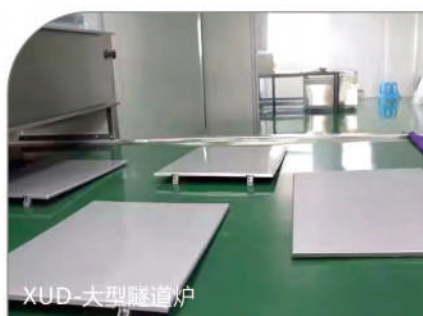

XUD-大型隧道炉



XUD-机械手喷涂机

选用配件

OPT FOR ACCESSORIES



#304水烧加热管




#310 800度催化燃烧专用加热管



#316无缝钢管



空气干烧管

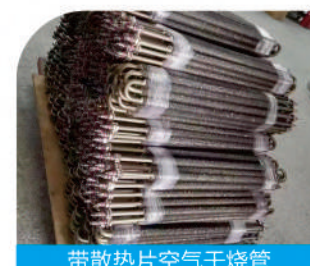

带散热片空气干烧管



#316 化工专用加热管



电镀专用加热管




温控器



烤箱专用电机



防爆电机

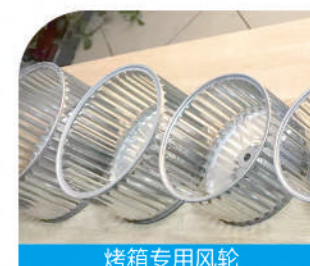


烤箱专用风轮




温控箱




电力调整器

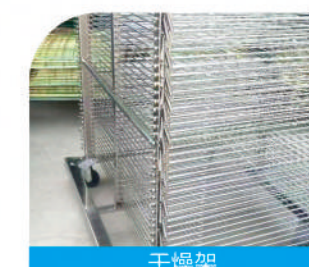

干燥架




不锈钢周转车

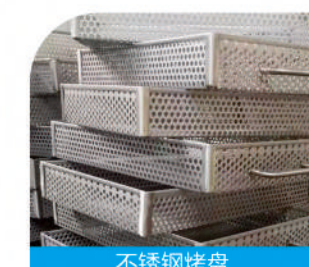


不锈钢烤盘




铁氟龙网带

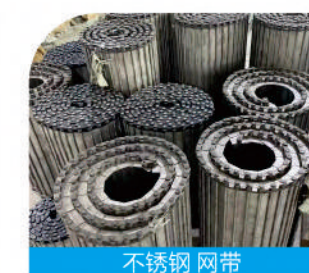

不锈钢网带



防滑带

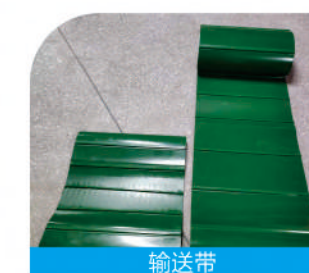

输送带