

Flat head

Wax

# B115W

- ▶ Excellent blackness.
- ▶ Applicable to a wide range of receiving labels: paper, coated paper, PET/PP/PE/PVC films...

## ▶ RIBBON PROPERTIES

Total ribbon thickness: < 9µm



Ink melting point: 65°C

Polyester film thickness: 4.5µm



Friction coefficient: < 0.2

## ▶ GENERAL CONDITIONS

Usage conditions: 5 to 35°C at 20 to 80 % of relative humidity.

Storage life: 12 months after slitting day.

Storage conditions: Keep indoor avoiding high temperature (such as beside a heat source), high humidity, direct sun light.

## ▶ CERTIFICATES / REGULATIONS / DIRECTIVES

- RoHS
- WEEE
- 2002/95/EC
- 2002/96/EC
- 2011/65/EC
- ISO EN71-3
- REACH
- Halogen free
- California Proposition 65



## ▶ PRINTING PROPERTIES

|               | Non-coated paper | Coated paper | High gloss paper | Synthetics |
|---------------|------------------|--------------|------------------|------------|
| Compatibility | ✓                | ✓            | ✓                | △          |

Maximum printing speed 12 IPS

Note: Smoothness Bekk for paper family must be over 200s.



244 Soi Pattanakarn 53, Pattanakarn, Suanluang, Bangkok 10250 Thailand  
 Tel : (66) 0-2322-9535, 0-2722-4040 Fax : (66) 0-2322-7990  
 www.cps.co.th • www.facebook.com/cps.co.th




## ▶ DURABILITY OF PRINTED IMAGE

| TESTS           | RESULTS    |
|-----------------|------------|
| Smear           | ANSI > C   |
| Heat resistance | Up to 60°C |
| Light           | ANSI B     |
| Water           | ANSI A     |


- June 2015 -

## ▶ B115W DURABILITY

### Image quality

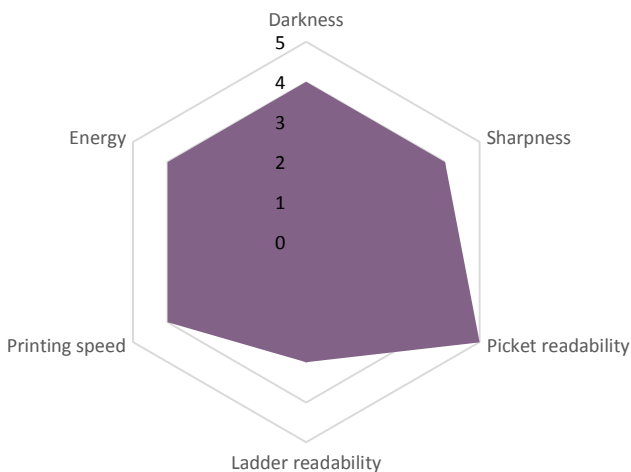

### Resistance

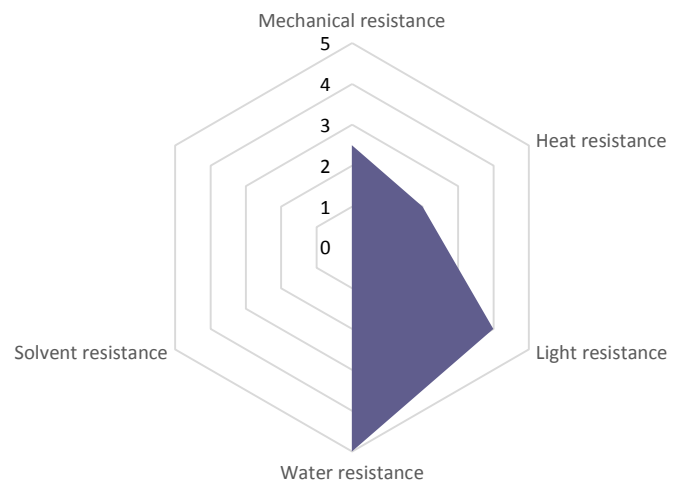

5 : no damage  
 0 : erased