
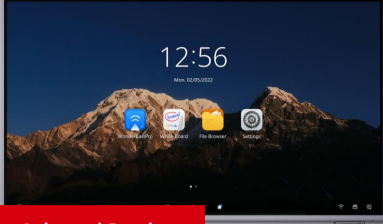



Product Comparison

Technical Parameters			
<input type="radio"/> Highlights Differences <input checked="" type="radio"/> All Parameters	 <p>Selected Product</p>	 <p>COMPARE</p>	 <p>COMPARE</p>
DS-D5B65RB/C 65-inch 4K Interactive Display	DS-D5B75RB/C 75-inch 4K Interactive Display	DS-D5B86RB/C 86-inch 4K Interactive Display	
Operation System	Android 11	Android 11	Android 11
Processor	A72*2 + A53*4, 1.8 GHz	A72*2 + A53*4, 1.8 GHz	A72*2 + A53*4, 1.8 GHz
Memory	4 GB	4 GB	4 GB
Built-In Storage	64 GB	64 GB	64 GB
NIC	Built-in 1000 Mbps NIC, supporting routing; IEEE 802.11 a/b/g/n/ac with 2 × 2 MIMO, supporting both 2.4 GHz and 5GHz bands	Built-in 1000 Mbps NIC, supporting routing; IEEE 802.11 a/b/g/n/ac with 2 × 2 MIMO, supporting both 2.4 GHz and 5GHz bands	Built-in 1000 Mbps NIC, supporting routing; IEEE 802.11 a/b/g/n/ac with 2 × 2 MIMO, supporting both 2.4 GHz and 5GHz bands
Screen Size	65 inch LED Backlight	75 inch LED Backlight	86 inch LED Backlight
Backlight	DLED	DLED	DLED
Pixel Pitch	0.124 (H) × 0.372 (V) mm	0.143 (H) × 0.430 (V) mm	0.164 (H) × 0.493 (V) mm
Resolution	3840 × 2160@60 Hz	3840 × 2160@60 Hz	3840 × 2160@60 Hz
Brightness	350 cd/m ²	350 cd/m ²	350 cd/m ²
Color Depth	10 bit	10 bit	10 bit
Contrast Ratio	4000 : 1 (Typ.)	4000 : 1 (Typ.)	4000 : 1 (Typ.)
Response Time	6 ms	6 ms	6 ms
Color Gamut	90% NTSC (CIE1931) (Typ.)	90% NTSC (CIE1931) (Typ.)	90% NTSC (CIE1931) (Typ.)
Refresh Rate	60 Hz	60 Hz	60 Hz
Viewing Angle	178° (H) / 178° (V)	178° (H) / 178° (V)	178° (H) / 178° (V)
Power	100 to 240 V, AC, 50/60 Hz	100 to 240 V, AC, 50/60 Hz	100 to 240 V, AC, 50/60 Hz
Product Dimensions	1507 × 930 × 86 mm	1718 × 1046 × 87.5 mm	1963 × 1159 × 87.5 mm
Package Dimensions (W × H × D)	1687 × 1061 × 234 mm	1927 × 1212 × 254 mm	2187 × 1366 × 274 mm
Net Weight	39.86 kg	51.75 kg	65.12 kg
Gross Weight	50.19 kg	68.56 kg	86.24 kg
Lifespan	50000 hours	50000 hours	50000 hours
Video & Audio Input	HDMI IN × 2, MAX 4K @30 Hz, LINE IN × 1	HDMI IN × 2, MAX 4K @30 Hz, LINE IN × 1	HDMI IN × 2, MAX 4K @30 Hz, LINE IN × 1

Video & Audio Output	HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1	HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1	HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1
Control Interface	RS-232 × 1, Touch-USB × 1	RS-232 × 1, Touch-USB × 1	RS-232 × 1, Touch-USB × 1
Network Interface	RJ45 (1000 Mbps port) × 2	RJ45 (1000 Mbps port) × 2	RJ45 (1000 Mbps port) × 2
Data Transmission Interface	USB-C × 1, USB-A × 2 on front panel, USB-A × 2 on rear panel	USB-C × 1, USB-A × 2 on front panel, USB-A × 2 on rear panel	USB-C × 1, USB-A × 2 on front panel, USB-A × 2 on rear panel
Loudspeaker	Built-in 2 × 16 W loudspeaker	Built-in 2 × 16 W loudspeaker	Built-in 2 × 16 W loudspeaker
Bluetooth	Built-in BLE (Bluetooth Low Energy) module supports Bluetooth 5.0 and previous version	Built-in BLE (Bluetooth Low Energy) module supports Bluetooth 5.0 and previous version	Built-in BLE (Bluetooth Low Energy) module supports Bluetooth 5.0 and previous version
Power Consumption	≤ 320 W (full load)	≤ 370 W (full load)	≤ 490 W (full load)
Standby Consumption	0.5 W	0.5 W	0.5 W
Product Model	DS-D5B65RB/C	DS-D5B75RB/C	DS-D5B86RB/C
Type	Infrared touch screen	Infrared touch screen	Infrared touch screen
Glass	AG smooth glass	AG smooth glass	AG smooth glass
Touch Point	Max 45 point multi-touch	Max 45 point multi-touch	Max 45 point multi-touch
Touch Response Time	< 10 ms	< 10 ms	< 10 ms
Touch Precision	± 1 mm (≥ 90% touching area)	± 1 mm (≥ 90% touching area)	± 1 mm (≥ 90% touching area)
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10% to 90% RH	10% to 90% RH	10% to 90% RH

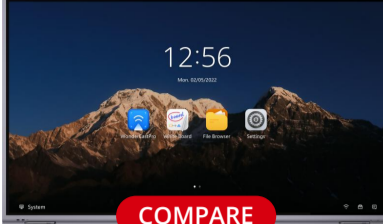

Computer Peripheral and Supplies Ltd.

244 ซอยพัฒนาการ 53 แขวงพัฒนาการ เขตสวนหลวง กรุงเทพมหานคร 10250

244 Soi Pattanakarn 53, Pattanakarn, Suanluang, Bangkok 10250 Thailand



facebook.com/cps.co.th



Tel. 02-7224040 Ext.9



www.cps.co.th



scan here

ติดต่อสอบถาม
ข้อมูลเพิ่มเติม

