



EDS

ENTERPRISE DISPLAY SOLUTIONS

CDG | Computer Peripheral
and Supplies Ltd.



Tempered Glass
Frontal with IP65



High Brightness
300 nit



Wide Temp
-20 - 70C

EPM-156/EPC-156

15.6" 1920x1080 Industrial Grade IP65 Frontal Touch Terminal

EPM-156 is 15.6" Industrial Touch Monitor and EPC-15.6 is 15.6" Industrial Touch Panel PC for industrial use with high quality panel that can use in harsh environment (-20-70C) with high brightness (300 nits). The HD Resolution 1920x1080 on ratio 16:9 delivers the best quality for video, image and text that easy to read with wide view angle of 178° (H), 178° (V) to assure for any angle of viewing. The structure is made with metal case with IP65 Frontal assure the best quality for industrial application.

CDG | Computer Peripheral
and Supplies Ltd.

Computer Peripheral and Supplies Ltd.

244 Soi Pattanakarn 53, Pattanakarn, Suanluang,
Bangkok 10250 Thailand

Contact Us

Tel : (66) 0-2322-9535, 0-2722-4040

Fax : (66) 0-2322-7990

E-Mail : sales.dept@cps.co.th

Web site : www.cps.co.th, www.facebook.com/cps.co.th

More Details

Scan Here

LINE ID

Need more

Information




HIGHLIGHTS OF 15.6" 1920X1090 INDUSTRIAL GRADE IP65 FRONTAL TOUCH TERMINAL

EPM-101 is 15.6" Industrial Touch Monitor and EPC-15.6 is 15.6" Industrial Touch Panel PC for industrial use with high quality panel that can use in harsh environment (-20-70C) with high brightness (300 nits). Full HD Resolution 1920x1080 on ratio 16:9 delivers the best quality for video, image and text that easy to read with wide view angle of 170° (H), 170° (V) to assure for any angle of viewing. The structure is made with metal case with IP65 Frontal assure the best quality for industrial application.

SPECIFICATION OF EPM-156/ EPC-156

Model Name	EPM-156	EPC-156
Description	15.6" Industrial Touch Monitor	15.6" Industrial Touch Panel PC
Display Size	15.6" Diagonal	
Display area (mm)	344.16(W)×193.59(H) mm	
Brightness	300 cd/m ²	
Resolution	1920x1080 pixel	
Aspect ratio	16:9	
Contrast ratio	800 : 1 (Typ.) (Transmissive)	
Pixel pitch (um)	0.17925 (H) X 0.17925 (V)	
Pixel per inch (PPI)	141PPI	
Viewing angle	85/85/85/85 (Typ.)(CR≥10)	
Display Color	16.7M	
Touchscreen	PCAP Multitouch 10 Points	
Front Protection	Tempered Glass	
Engine	HDMI+VGA for Display + USB for Touch	Intel Celeron J4215 4Core 2.0GHz
Memory/ Storage	N/A	8G DDR4, 128GB SSD
Input Port	USB for Touchscreen	4x USB, HDMI, VGA, Audio In/Out
Network	N/A	Gigabit LAN (RJ45), WIFI, BT
OS	N/A	Windows 10/ Linux
MTBF	30KHrs	30KHrs
Input power	12Vdc Adaptor for 100-240Vac	
Power consumption	15W	50W
Dimensions (mm)	Approx. 247.4x166.4x36 (TBD)	Approx. 247.4x166.4x36 (TBD)
Weight (Net)	2 kg	3 kg
Mounting	VESA 75x75mm	
Operating temperature	-20°C ~ +70°C	0°C ~ +50°C
Storage temperature	-20°C ~ +70°C	-20°C ~ +60°C

DRAWING OF EPM-156/EPC-156

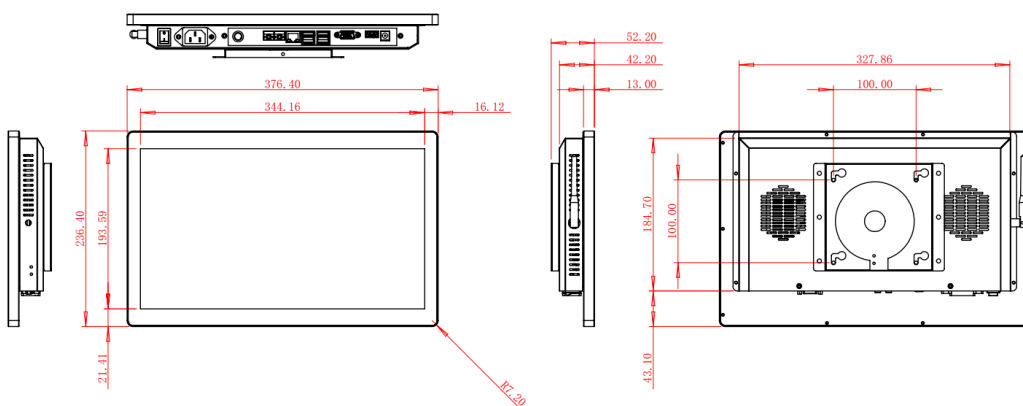

More Details

Scan Here
LINE ID
Need more
Information

