



# Industrial-level durability, long-time reliability

iData K8 is an ultra-rugged Android smart mobile terminal designed for large-scale warehouses, goods transportation centers, and manufacturing factories, etc. K8 features excellent performance and reliability, ultra-long product lifespan. Thus your enterprise can benefit from a single purchase of K8 for a very long time.

#### Ultra-long product lifespan

K8 has anticipated the future challenges, from the processor, memory to the system and Android subsequent support, the device has taken the future needs into consideration. As a practical hardware, K8 is able to run upgraded system or Apps in the future, which makes it survive longer lifespan and will benefit your enterprise in the long run.

#### Designed to fit into complex environments

Both the ultra-rugged ingress protection and the ultra-big 6700mAh battery are making the K8 more durable at work. Besides, the device can survive accidental drops from a forklift or long working hours requirement.

#### Improve operation efficiency for warehouses and factories

Support up to 21.4m furthest scanning, the forklift can quickly scan the barcodes of the shelves and goods in a long distance. With the support of Bluetooth 5.0, K8 can connect to all kinds of earphones, printers and various extensive applications.













# **K8 Technical Specifications**

#### **System Configuration**

Processor	Octa-core 2.0GHz high-performance processor
Operating System	Android 11.0/Android 12.0(GMS)
Memory (ROM+RAM)	64GB + 4GB (standard)
SIM	Dual SIM card
Expansion Slot	Micro SD card (up to 256 GB)
Display Screen	4-inch, resolution: 800*480 pixels
Touch Screen	Industrial capacitive screen, support wet-hand operation/glove mode/multi-touch/gesture operation
Camera	13 megapixels of rear camera, support auto-focus, 5 megapixels of front camera
Flashlight	800mA flashlight
Keypad	34 keypads in total: front key*29, side scan key *2, side PTT key *1, side ±volume key *2
Battery	3.85V lithium battery, with 6700mAh, detachable, backup-battery support
Audio	Built-in dual microphone ( noise-canceling microphone)
Charging Method	Type-C charging and pin port charging, support 9V/2A, 5V/3A fast charging
Reminder	High-power speaker/3 sides scan LED reminder/Vibration reminder/Charging LED reminder
Vibrating Motor	Built-in vibrating motor
Sensors	G-sensor/ Proximity sensor/Light sensor
Intercom Function (Optional)	Support one-button PTT calls

#### **Scanning Engine**

Barcode Type	It can scan one-dimensional / twodimensional barcodes
Scanning Accuracy	≥3.33mil
Scanning Angle	Pitch: ±60°; Skew: ±45°; Tilt: 360°
View Angle	Horizontal: 44.3°, Vertical: 28.4°, Diagonal: 51°
Motion Error Tolerance	8m/s

#### **Communication Transmission**

WWAN (Network Frequency)	China & Eurasian version: 2G: B2/B3/B5/B8 3G: WCDMA: B1/B5/B8, CDMA&EVDO: BC0, TD-SCDMA: B34/B39 4G: FDD-LTE: B1/B3/B5/B7/B8/B20, TDD-LTE: B34/B38/B39/B40/B41 American version: 2G: B2/B3/B5 3G: B1/B2/B4/B5, CDMA&EVDO: BC0/BC1 (The United States) 4G: B1/B2/B3/B4/B5/B7/B12/B17/B28A/B28B/B41
WWAN (Data Service)	GSM/GPRS/EDGE/CDMA/UMTS/HSPA/HSPA+/EVDO /WCDMA/TD-SCDMA/TDD-LTE/FDD-LTE
WLAN Function	Wi-Fi 802.11a/b/g/n/r/ac (2.4G + 5G dual-band Wi-Fi), support Wi-Fi 5G PA amplifier
Bluetooth	Bluetooth 5.0, support BLE
GPS	GPS/AGPS/BDS/Galileo/GLONASS/QZSS

#### **Structure Parameter**

Dimension (L*W*D)	205mm*76mm*31mm
Weight	440g (including the battery)

#### **Environmental Parameter**

Working Temperature	-30°C - 50°C *Do not charge under low temperature conditions for the safety Concerns
Storage Temperature	-40°C - 70°C
Humidity	0 - 95% (no moisture condensation)
Drop Specification	Multiple drops to concrete floor from the height of 1.5m (without protective case) Multiple drops to concrete floor from the height of 1.8m (with protective case)
Roller Drop Specification	500 times of roller drops from a height of 1 meter
Ingress Protection	IP68
ESD Protection	±15KV (air discharge), ±8KV (contact discharge)

### NFC (Standard)

Working Frequency	13.56 MHz
Reading Distance	Within 60 mm
Communication Protocol	ISO14443A/14443B/15693

### **Development Support**

Programming Language	Java
Development API	iScan API (Scanning Development Kits), Device API (Device Management/Configuration Development Kits), Android Standard Interface
Development Tool	Eclipse/Android Studio

#### **Communication Interface**

USB Interface	Type-C (with headset function) *1
OTG Interface	Support

#### Accessories (More details in accessories guide)

Standard Accessories	USB cable*1, hand strap *1, power adapter*1,device-back strap*1, battery*1
Optional Accessories	Single charging cradle, bottom charger, 4-slot charging cradle, 4-slot battery charging cradle, pistol grip, protective case

The information of iData products and software service may be subject to change without notice. Please contact your iData sales representative for the latest details.





### Each product comes with a pack of practical and cost-effective accessories

### **USB Cable**

Type-C to USB cable, 1m in length, support charging and data transmission



CHA-USBC-GNR

## **Hand Strap**

Wear on your wrist to carry the device, avoid accidental drops, and assure the safety of equipment



MNT-HS-GNR

## **Device-back Strap**

Attach on the device back to help you hold the device easily and firmly, avoid accidental drops



MNT-BS-K8

## **Battery**

6700mAh, detachable design.

ps: every product comes with 1 unit, you can purchase extra unit



CHA-BTRY-K8-6700MA

## **Power Adapter**

 $Input\ voltage\ 100-240V,\ output\ 5V2A.\ Support\ plug\ types\ of\ China/Europe/UK/US/Australia,\ match\ with\ CHA-USBC-GNR$ 

ps: you may have one of the power adapters



CHA-PWAD-GNR-5V2A-CN



CHA-PWAD-GNR-5V2A-EU



CHA-PWAD-GNR-5V2A-UK



CHA-PWAD-GNR-5V2A-US



CHA-PWAD-GNR-5V2A-AU

### Improve management efficiency of devices and operational level of enterprises

## **Bottom Charger**

Bottom charger for the main unit, support charging for 1 device. USB-A port, can connect with CHA-PWAD-GNR-5V2A-XX accessory



CHA-BTC-K8

## **Battery**

6700mAh, detachable design.

ps: every product comes with 1 unit, you can purchase extra unit



CHA-BTRY-K8-6700MA

## **Single Charging Cradle**

Support charging for 1 main unit. Support plug types of China/Europe/UK/US/Australia ps: you may have one of the power adapters





CHA-CRD1S-K8

## **4-slot Charging Cradle**

Support maximum charging of 4 main units at the same time. Support plug types of China/Europe/UK/US/Australia

ps: you may have one of the power adapters







## **4-slot Battery Charging Cradle**

Support maximum charging of 4 batteries at the same time. Support plug types of China/Europe/UK/US/Australia


ps: you may have one of the power adapters





CHA-CRD4B-K8

### Improve device portability and comfort for users, boost working efficiency

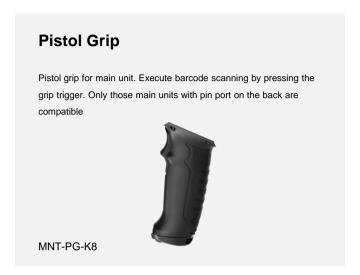

## K8 Optional Accessories for Protection

Accessories Guide

### Lower risks of malfunction during usage, extend lifespan of devices



The information of iData products and software service may be subject to change without notice. Please contact your iData sales representative for the latest details.



