



Print Server with 1 Parallel Port



FPS-1031

H/W Version: 1

The LevelOne FPS-1031 print server is an ideal network printing solution for small offices, home offices, schools and other businesses that require printer sharing over the same network.

Multi OS and Network Printing Protocol Support


The FPS-1031 is a print server with 1 parallel port that supports Windows ME, 2000, XP and Vista operating systems as well as Mac OS 8.1 and higher, UNIX/Linux and Netware (Bindery/NDS).

Network Protocol supported includes TCP/IP, IPX, NetBEUI, AppleTalk, LPR and SMB over TCP/IP for

flexible use with different network clients connected to the same office network. The FPS-1031 also includes Internet Printing Protocol (IPP) support and Windows Print Monitor Technology to monitor printing jobs received.

Easy Installation Wizard

The LevelOne FPS-1031 is easily configurable using a Web Browser or the Windows based configuration program included with the CD-ROM.

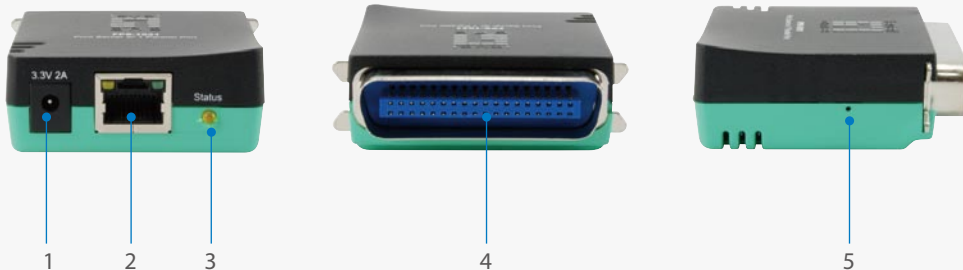

1. Power Port
2. RJ-45 LAN Port
3. Status Indicator
4. Parallel Port
5. Reset Port

Key Features

- Parallel print server for network print sharing
- Fast Ethernet network connectivity
- Easy set-up wizard included
- Web based user interface
- Support multiple operating systems
- Support multiple network printing protocols

Related Products



FPS-1032
Print Server with 1 USB Port



FPS-1033
Print Server with 2 USB and 1 Parallel Ports

Technical Specification

Standards Compliance

IEEE 802.3 10Mbps Ethernet
IEEE 802.3u 100Mbps Fast Ethernet

Network Interface

1x 10/100Mbps Auto-sensing RJ-45 port
1x DB-36 pin male Centronic (bi-directional)
DHCP Client

Operating System Support

Windows ME, 2000, XP, Vista
Mac OS 8.1 or higher
UNIX/Linux
NetWare (Bindery/NDS)

Network Print Protocol Support

TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB over
TCP/IP, Internet Printing Protocol (IPP), RAW

Software Upgradeable

Web interface
Windows-based Setup Program
TFTP

Device Management

Web-based user interface
Windows-based Setup Program
SNMP & HP Web JetAdmin Support

Physical Specifications

LEDs
Power/Status, Link, Activity

Power Supply

3.3V, 2A

Dimension

59mm (L) x 57mm (W) x 23mm (H)

Weight

52g


Operating Temperature and Humidity

Operating: 0°C ~ 50°C @ 0% ~ 70% (non-condensing)
Storage: -5°C ~ 65°C @ 0% ~ 80% (non-condensing)

EMI Certifications

CE, FCC Class B

Product Diagram

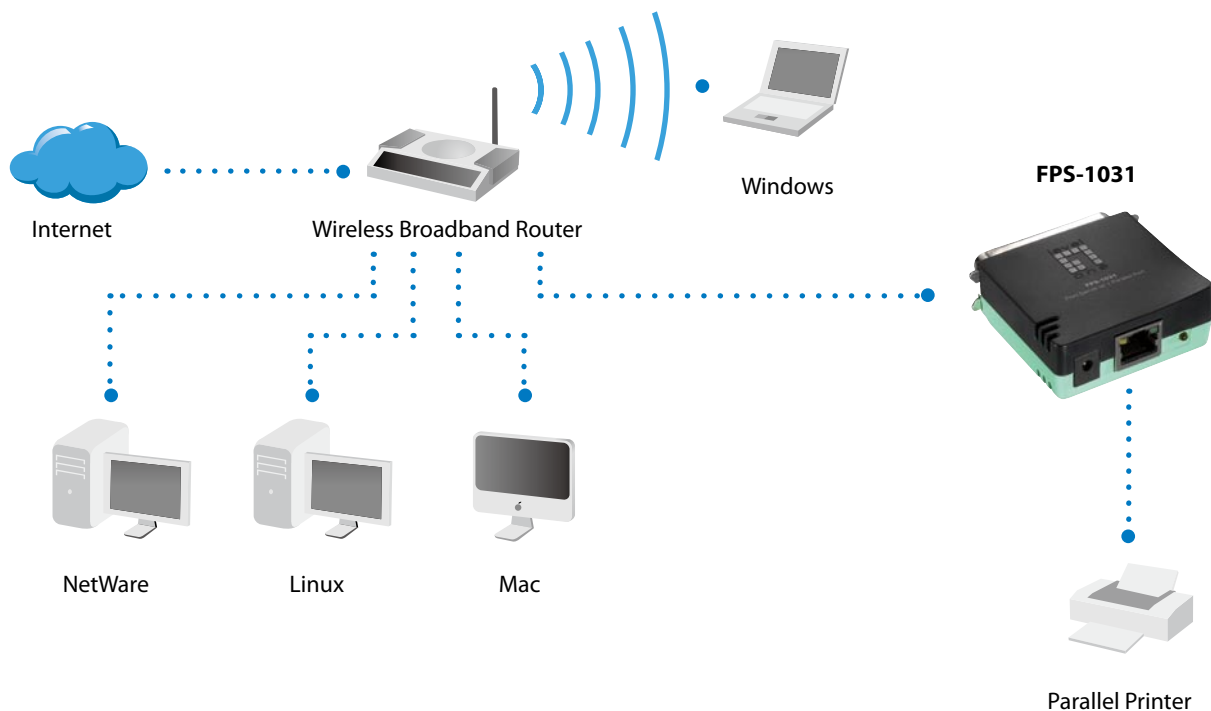

Order Information

Package Content

FPS-1031: Print Server with 1 Parallel Port

FPS-1031
Power Adapter
CD Manual/Driver/Utility
Quick Installation Guide

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.

© Copyright Digital Data Communications GmbH. All Rights Reserved.

LINE@ @cps.co.th

