



Print Server with 2 USB and 1 Parallel Ports



FPS-1033

H/W Version: 1

The LevelOne FPS-1033 print server is an ideal network printing solution for small offices, home offices, schools and other businesses that require printer sharing over the same network.

Multi Printer Support

The FPS-1033 Multi Port print server provides simultaneous connectivity to two USB and one Parallel printers. It supports the USB 2.0 standard for high-speed printing.


Multi OS and Network Printing Protocol Support

The FPS-1033 Multi Port Print Server supports Windows ME, 2000, 2003, XP, Vista and 7 operating

systems as well as Mac OS 8.1 and higher and UNIX/Linux and Netware (Bindery/NDS). Network Print Protocol supported includes TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB over TCP/IP and IPP for flexible use with different network clients connected to the same office network.

Easy Installation Wizard

The LevelOne FPS-1033 is easily managed through a Web based user interface and the firmware is upgradeable through TFTP, the windows set-up program or the Web based user interface.

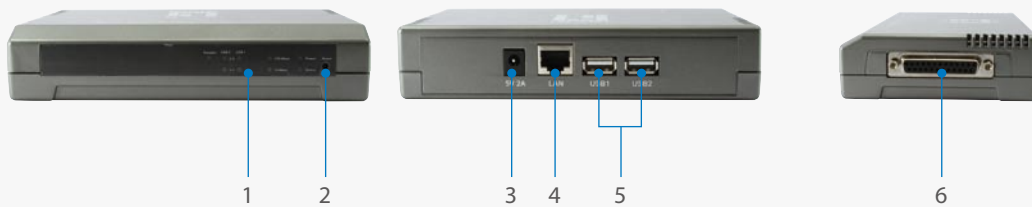

1. LED Indicators
2. Reset Port
3. Power Port
4. RJ-45 LAN Port
5. USB Ports
6. Parallel Port

Key Features

- USB print server for network print sharing
- High-speed USB 2.0 interface
- Fast Ethernet network connectivity
- USB print server for network print sharing
- Easy set-up wizard included
- Web based user interface
- Support multiple operating systems
- Support multiple network printing protocols

Related Products



FPS-1031
Print Server with 1 Parallel Port



FPS-1032
Print Server with 1 USB Port

Technical Specification

Standards Compliance

IEEE 802.3 10Mbps Ethernet
IEEE 802.3u 100Mbps Fast Ethernet

Network Interface

1x 10/100Mbps Auto-sensing RJ-45 port
2x USB 2.0 Auto-sensing port
1x Parallel Printer Port (D-Type 25 pin female)
DHCP Client

Operating System Support

Windows ME, 2000, XP, Vista, 7
Mac OS 8.1 or higher
UNIX/Linux
NetWare (Bindery/NDS)

Network Print Protocol Support

TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB over TCP/IP, Internet Printing Protocol (IPP), RAW

Software Upgradeable

Web interface
Windows-based Setup Program
TFTP

Device Management

Web-based user interface
Windows-based Setup Program
Telnet

LEDs

Power/Status, Link, Activity

Power Supply

5V, 2A

Dimension

180mm (L) x 100mm (W) x 35mm (H)

Weight

255g


Operating Temperature and Humidity

Operating: 0°C ~ 50°C @ 0% ~ 70% (non-condensing)
Storage: -5°C ~ 65°C @ 0% ~ 80% (non-condensing)

EMI Certifications

CE, FCC Class B

Product Diagram

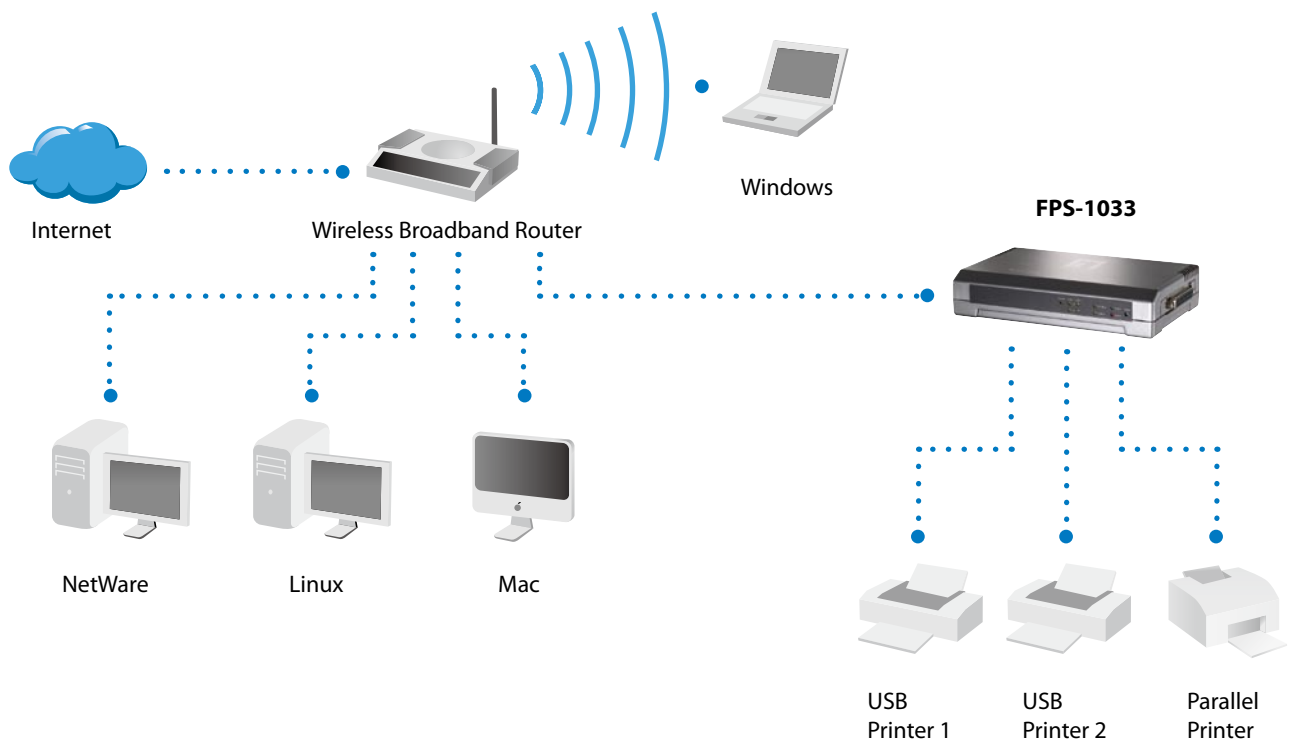

Order Information

Package Content

FPS-1033: Print Server with 2 USB and 1 Parallel Ports

FPS-1033
Power Adapter
CD Manual/Driver/Utility
Quick Installation Guide

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without

notice. © Copyright Digital Data Communications GmbH. All Rights Reserved.

