




> aWR1

- Competitiveness
- Good printing quality
- Receptor multi-compatibility

AWR®1 is the most competitive wax ribbon of the inkanto range.


AWR®1 is the ideal solution for applications particularly sensitive to the quality/price ratio.

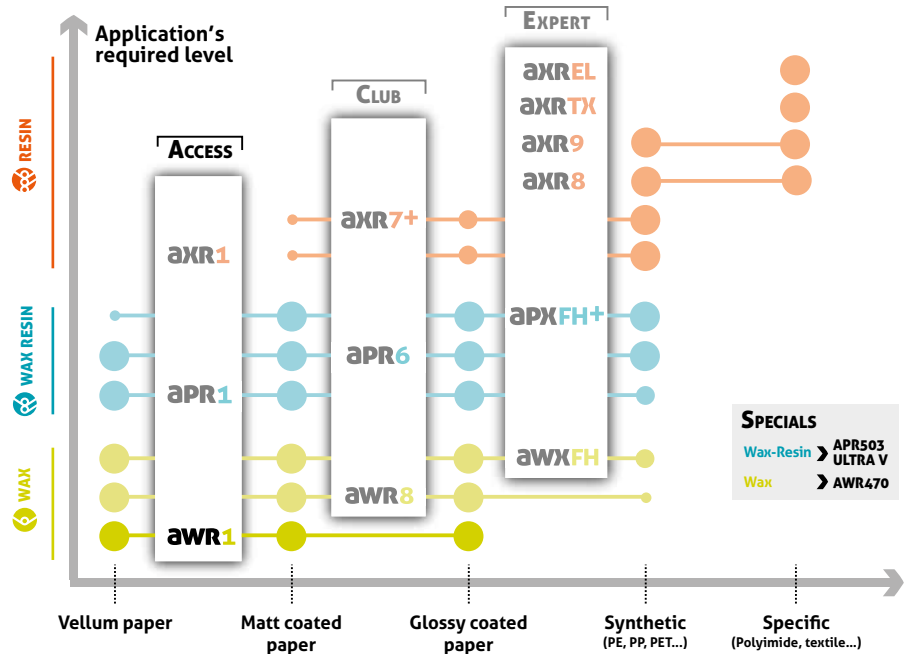


Printing receptor

papers	
Vellum	●●●
Coated	●●●
Glossy coated	●●●

Printer settings

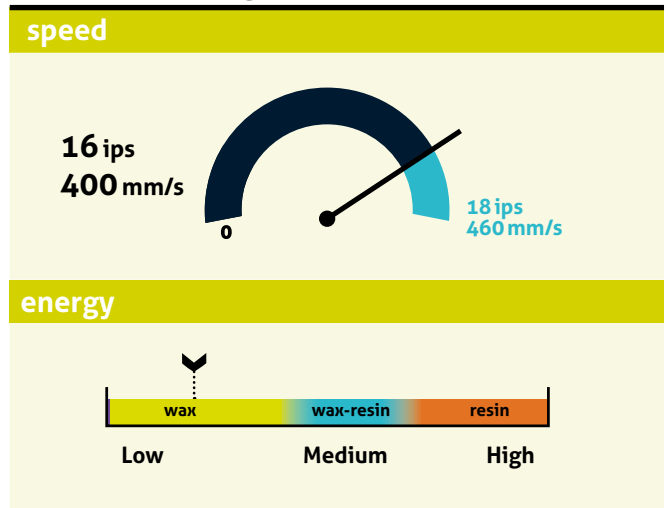

Print resistance

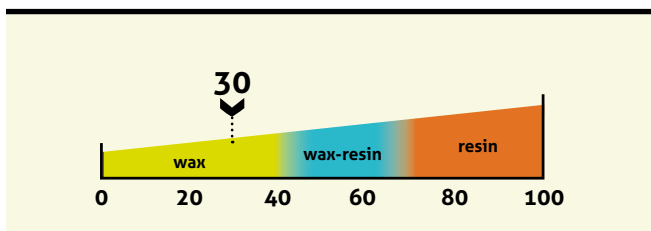

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

Your ribbon identity

Colours: ● ● ● ● ●

Length (m):

Width (mm):

Part number:


Your distributor:

Contact :



AWR1

Application fields

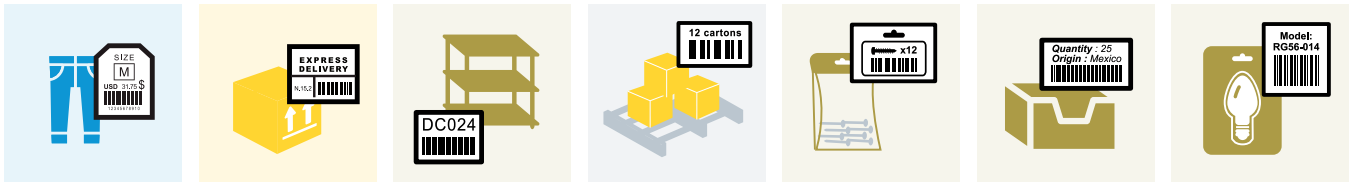


Product performance

print quality		
90°Barcode	60	A _a Small characters
0°Barcode	100	2D Barcode
		Logos
		Blackness <small>*Optical Density by Reflection, measured using a densitometer.</small>
technical resistances		
Heat	60°C / 140°F	Light/Blue Wool
	300°C / 572°F	Solvents
Water/Submerge	100	Rubbing

Product physico-chemical features

product structure	
PET film	Thickness: 4,5 µm
Ink	Wax
Melting point	65°C/149°F
Backcoating	Silicon based
Coefficient of Friction	Kd < 0.2
Ribbon thickness	< 8 µm
The ribbon is anti static build-up treated	

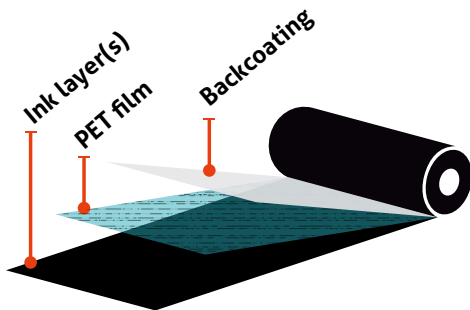

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.

